



· NANYA ROAD,MUGANG ZHAOQING
· CITY GUANGDONG CHINA.

· TEL:86-758-2875541,2870651,2877464,2876185,2877017

· FAX:86-758-2878014

· [Http://www.ledtech.com.tw](http://www.ledtech.com.tw)

LEDTECH ELECTRONICS CORP.

SPECIFICATION

PART NO. : LT8941RE-41

2.0×4.0MM RECTANGULAR LED LAMP

Approved by	Checked by	Prepared by
<i>Jack</i>	<i>Jang</i>	<i>Bao Min</i>



2.0×4.0MM RECTANGULAR LED LAMP

PART NO. : LT8941RE-41

Page : 1/5


Features

- * High intensity
- * Reliable and rugged
- * Low current requirement
- * IC compatible

Description

The Red lamp are made with GaAsP/GaP chip and Red diffused epoxy resin.

Package Dimensions

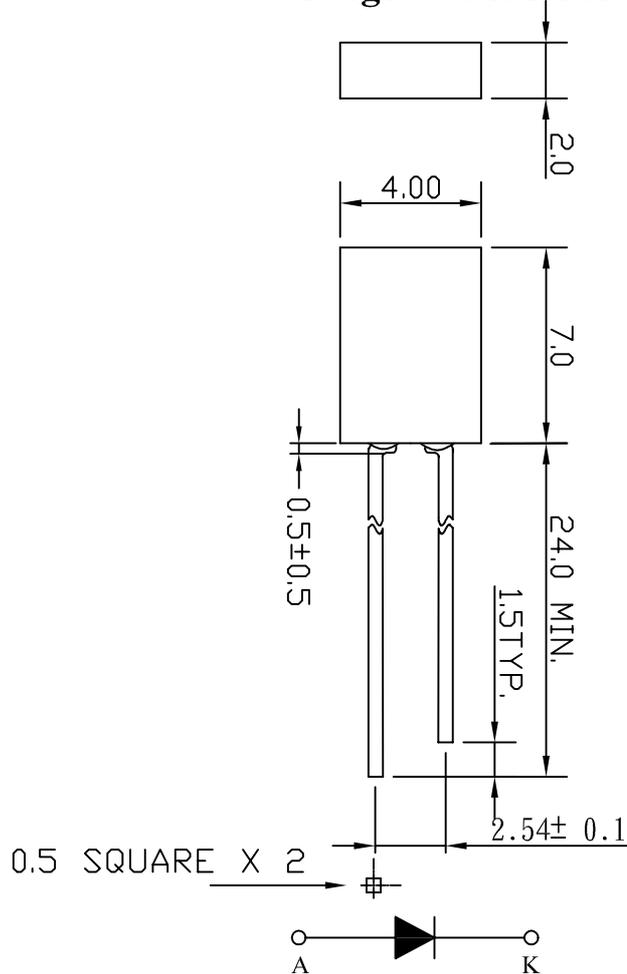

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.25 mm unless otherwise noted.

Part No.	Led Chip		Lens Color
	Material	Emitting Color	
LT8941RE-41	GaAsP/GaP	Orange	Red diffused



2.0×4.0MM RECTANGULAR LED LAMP
PART NO. : LT8941RE-41

Page : 2/5

Absolute Maximum Ratings at Ta=25°C :

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	78	mW
Reverse Voltage	Vr	5	V
D.C. Forward Current	If	30	mA
Peak Current (1/10 Duty Cycle , 0.1 ms Pulse Width)	If(Peak)	100	mA
Operating Temperature Range	Topr	-25 to +85	°C
Storage Temperature Range	Tstg	-40 to +100	°C
Lead Soldering Temp.(1.6mm from body) for 5 seconds		260	°C


Electrical and Optical Characteristics :

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Intensity	Iv	If=20mA	9.0	15.0		mcd
Forward Voltage	Vf	If=20mA		2.1	2.6	V
Peak Wavelength	λP	If=20mA		635		nm
Dominant Wavelength	λD	If=20mA		626		nm
Reverse Current	Ir	Vr=5V			100	μA
Viewing Angle	2 θ 1/2	If=20mA		120		deg
Spectrum Line Halfwidth	$\Delta \lambda$	If=20mA		35		nm




**2.0×4.0MM RECTANGULAR LED LAMP
PART NO. : LT8941RE-41**


Typical Electrical / Optical Characteristics Curves :

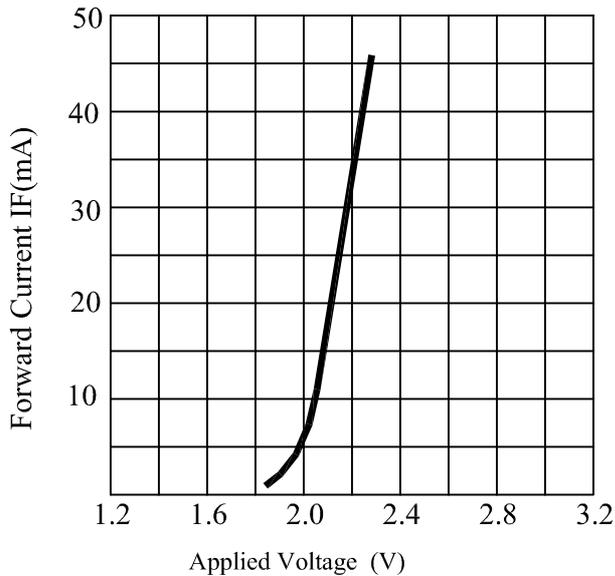


FORWARD CURRENT VS. APPLIED VOLTAGE

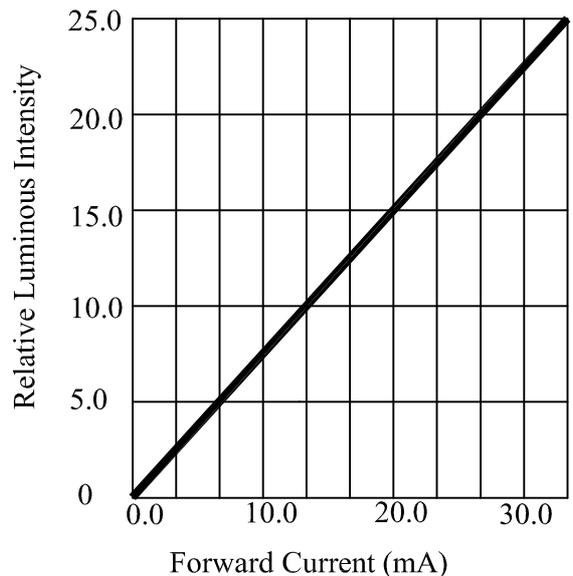

FORWARD CURRENT VS. LUMINOUS INTENSITY

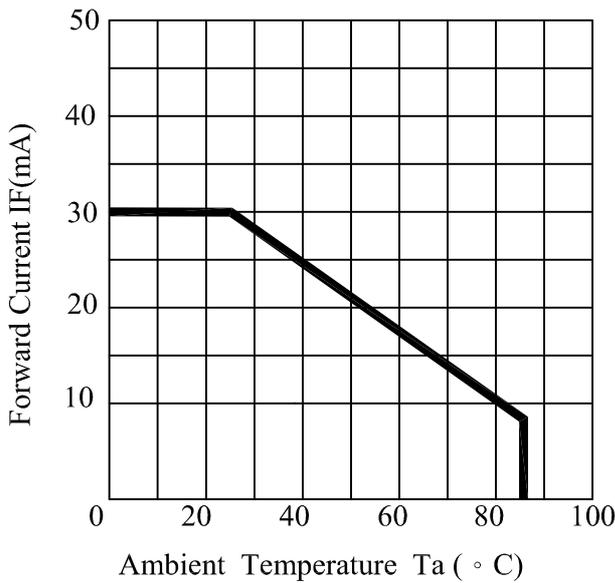

AMBIENT TEMPERATURE VS. FORWARD CURRENT

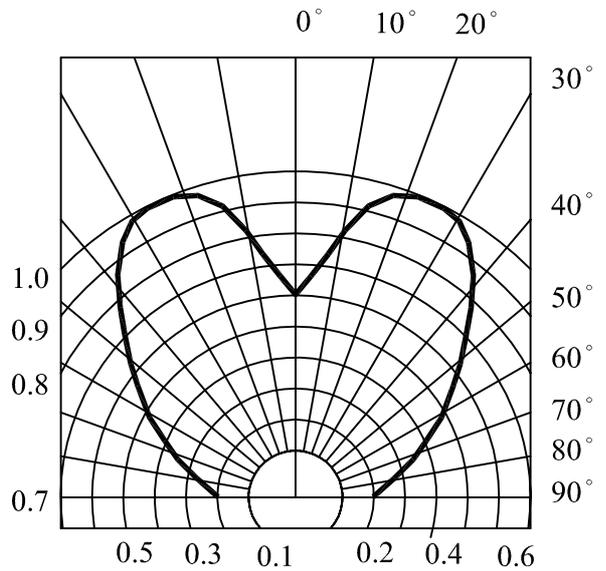

RADIATION DIAGRAM



2.0×4.0MM RECTANGULAR LED LAMP

PART NO. : LT8941RE-41

Page : 4/5

Reliability Test Method :

Test Item	Test Condition	Duration Time
Operation Life	If=20mA / Ta=25°C	168hrs
Storage at High Temperature	Ta=100°C	168hrs
Storage at Low Temperature	Ta=-40°C	168hrs
Storage at High Temperature/High Humidity	Ta=85°C /RH=85%	168hrs
Operating at High Temperature	Ta=85°C / If=20mA	168hrs
Operating at Low Temperature	Ta=-25°C / If=20mA	168hrs
Thermal Shock	Ta/T=100°C/30min~ -40°C/30min	10 cycles
Solderability	Tsol=230°C	5 sec

Criteria for Judging The Damage:

Item	Symbol	Test Condition	Criteria for Judgment	
			Min.	Max.
Forward Voltage	Vf	If=20mA	-----	Initial Data x1.1
Reverse Current	Ir	Vr=5V	-----	100 μ A
Luminous Intensity	Iv	If=20mA	Initial Data x0.8	-----




2.0×4.0MM RECTANGULAR LED LAMP

PART NO. : LT8941RE-41

ENCASED TYPE


PLASTIC PACKAGE
 QUANTITY: 1,000 PCS

LEDTECH ELECTRONICS CORP.	
PART NO :LTXXXX-XX	
Q'TY	: PCS
LOT NO	:XXXXXXXXXX
DATE	:
BIN CODE:	

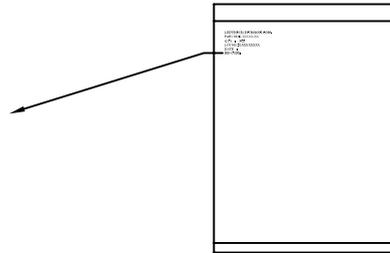

INNER BOX
 QUANTITY: 10 PACKETS
 TOTAL: 10,000 PCS

PART NO.	LXXXX-XX-XX				
LOT NO.	XXXXXXXXXX				
BIN CODE	Xx X	Xx X	Xx X	Xx X	TOTAL
QUANTITY	PCS	PCS	PCS	PCS	PCS
DATE	XXXX, XX, XX				

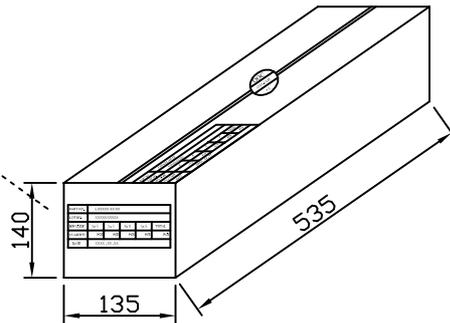

OUTER CARTON
 QUANTITY: 4 BOX
 TOTAL: 40,000 PCS

C/T NO. 箱號	XX
PART NO. 料號	LXXXX-XX-XX
QUANTITY 數量	PCS
N.W. 淨重	KGS
G.W. 毛重	KGS
REMARK 備註	

