
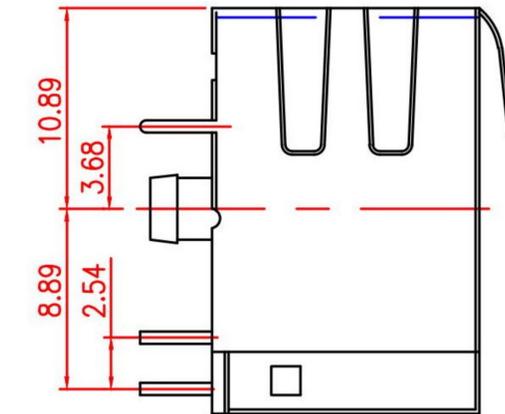
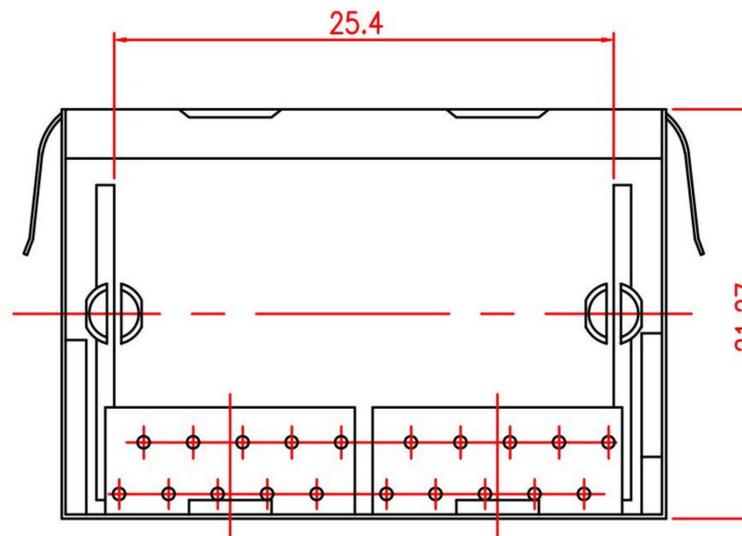


PCB Layout

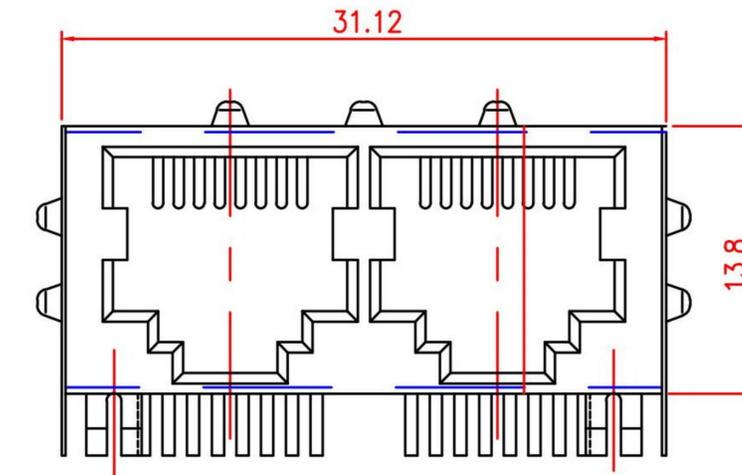

Materials

Housing: Glass Filled Polyester UL94V-0, Black
 Shielding: 0.25mm Thick Copper Alloy, Tin-plated
 Contact: 0.45mm Diameter Phosphor Bronze
 Gold Plating Over Nickel

Electrical Characteristics:

Insulation Resistance: 500MΩ Min.
 Contact Resistance: 30mΩ Max.
 Withstand Voltage: 1000VAC 1minute.
 Current Rating: 1.5A

General tolerance: ±0.2mm General angle tolerance: ±2°

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN		TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 SIDE ENTRY PCB JACK STAMPED PIN 10P8C GANG TYPE 2 PORTS FULLY SHIELDED B TYPE WITH 3 TABS BLACK INSULATOR ROHS
DWG. 製圖 ABBY	SCALE 比例 參考	UNIT 單位 MM	SIZE. 紙張尺寸 A4
DATE 制表日 2015/10/26	PAGE 張數 1 OF 1	REV. 版次 C	PART NO. 料號 C0060-08BBXB02R