



SPECIFICATION FOR LED DISPLAY

PART NO. : LA(C)5671-11LEWRS

0.56”(14.22mm) SINGLE DIGIT DISPLAY

Approved by: *Daniel Chen* Prepared by: *Tammy*

LEDTECH ELECTRONICS CORPORATION

5TH FL,NO.542-5,CHUNG CHENG ROAD,
HSIN-TIEN CITY,TAIWAN.

TEL : 886-2-22186891

FAX : 886-2-22181222,22182894



0.56”(14.22mm) SINGLE DIGIT DISPLAY

PART NO. : LA(C)5671-11LEWRS

Page : 1/5

Features

- * 0.56-INCH (14.22-mm) DIGIT HEIGHT.
- * LOW CURRENT REQUIREMENTS.
- * EXCELLENT CHARACTERS APPEARANCE.
- * WIDE VIEWING ANGLE.
- * SOLID STATE RELIABILITY.
- * I.C. COMPATIBLE.
- * CATEGORIZED FOR LUMINOUS INTENSITY.

Description

The LA(C)5671-11L is a 0.56-inch (14.22-mm) digit height single digit seven-segment display. The super bright red LED chips , which are made from AlGaAs on a transparent GaAs substrate. The device has a grey face and white segments.


Part No.	Led Chip		Description
	Material	Emitting Color	
LA5671-11LEWRS	GaAlAs	Super bright Red	Common Anode
LC5671-11LEWRS			Common Cathode



0.56”(14.22mm) SINGLE DIGIT DISPLAY

PART NO. : LA(C)5671-11LEWRS


Package Dimensions

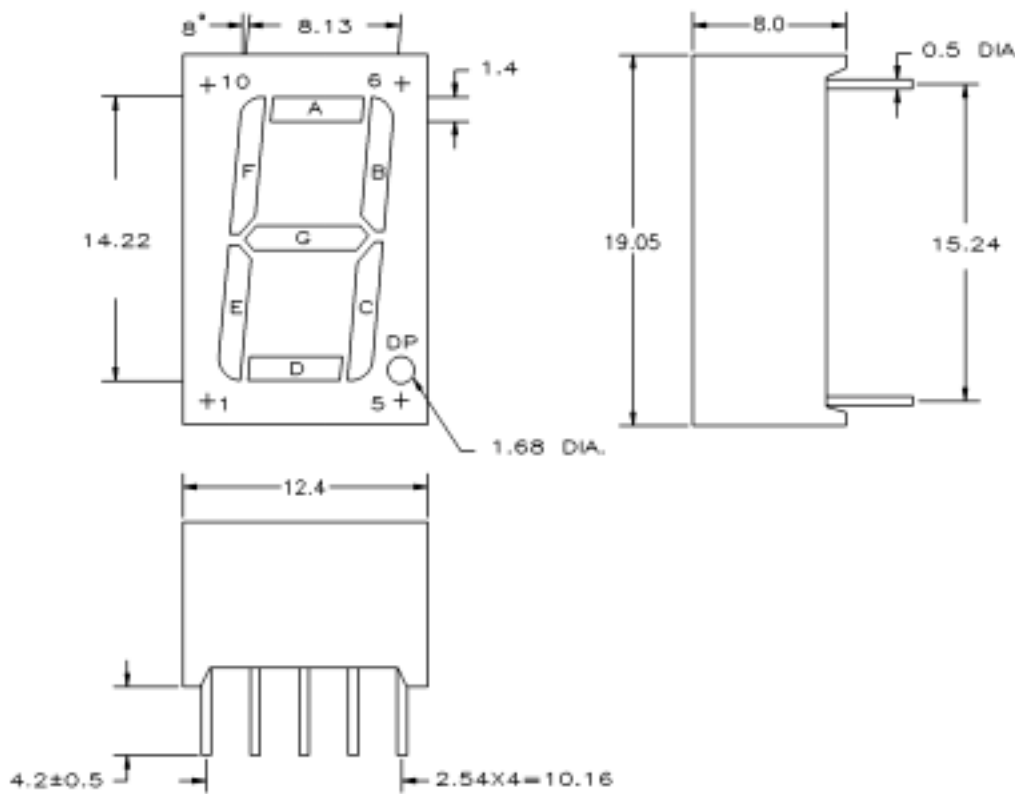


- 1.ALL DIMENSIONS ARE IN mm, TOLERANCE IS ±0.15mm UNLESS OTHERWISE NOTED.
- 2.THE SLOPE ANGLE OF ANY PIN MAY BE ±5.0°MAX.

Internal Circuit Diagram

LA5671-11L

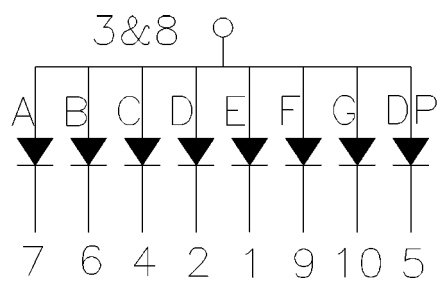

LC5671-11L

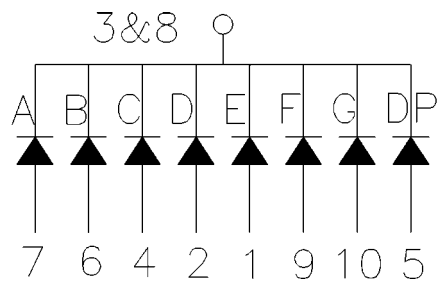



0.56”(14.22mm) SINGLE DIGIT DISPLAY

PART NO. : LA(C)5671-11LEWRS

Page : 3/5

Pin Function

LA5671-11L

Pin No.	Function
1	CATHODE E
2	CATHODE D
3	COMMON ANODE
4	CATHODE C
5	CATHODE DP
6	CATHODE B
7	CATHODE A
8	COMMON ANODE
9	CATHODE F
10	CATHODE G

LC5671-11L

Pin No.	Function
1	ANODE E
2	ANODE D
3	COMMON CATHODE
4	ANODE C
5	ANODE DP
6	ANODE B
7	ANODE A
8	COMMON CATHODE
9	ANODE F
10	ANODE G



0.56”(14.22mm) SINGLE DIGIT DISPLAY

PART NO. : LA(C)5671-11LEWRS

Page : 4/5

Absolute Maximum Ratings at Ta=25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage Per Led Chip	Vr	4	V
D.C. Forward Current Per Led Chip	If	30	mA
Pulse Current Per Led Chip (1/10 Duty Cycle, 0.1 ms Pulse Width)	If (Peak)	100	mA
Operating Temperature Range	Topr	-25 to +85	°C
Storage Temperature Range	Tstg	-25 to +100	°C
Lead Soldering Temp. (1.6mm from seating plane) for 3 seconds		260	°C


Electrical and Optical Characteristics :

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Intensity	Iv	If=2mA	1.5	2.5		mcd
Forward Voltage Per Segment	Vf	If=20mA		1.7	2.2	V
Peak Wavelength	λ_p	If=20mA		660		nm
Dominant Wavelength	λ_d	If=20mA		643		nm
Reverse Current Per Segment	Ir	Vr=4V			100	μA
Spectrum Line Halfwidth	$\Delta \lambda$	If=20mA		20		nm




0.56”(14.22mm) SINGLE DIGIT DISPLAY
PART NO. : LA(C)5671-11LEWRS


Typical Electrical / Optical Characteristics Curves :

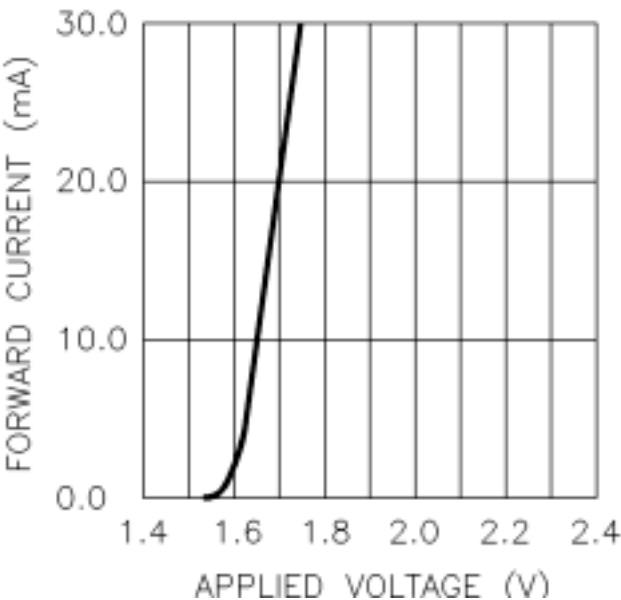


Forward Current vs. Applied Voltage

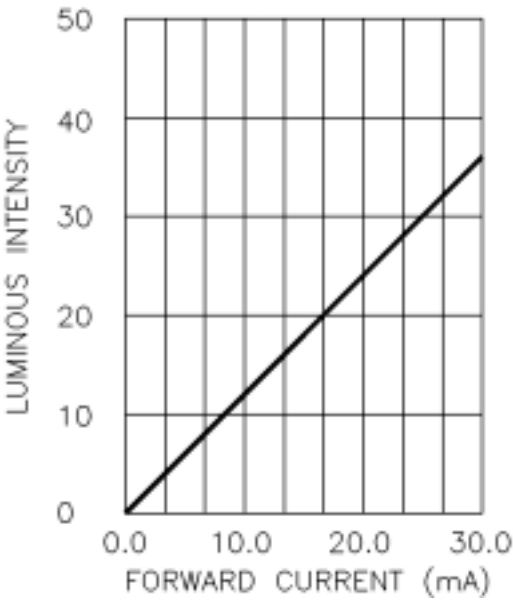

Luminous Intensity vs.
Forward Current

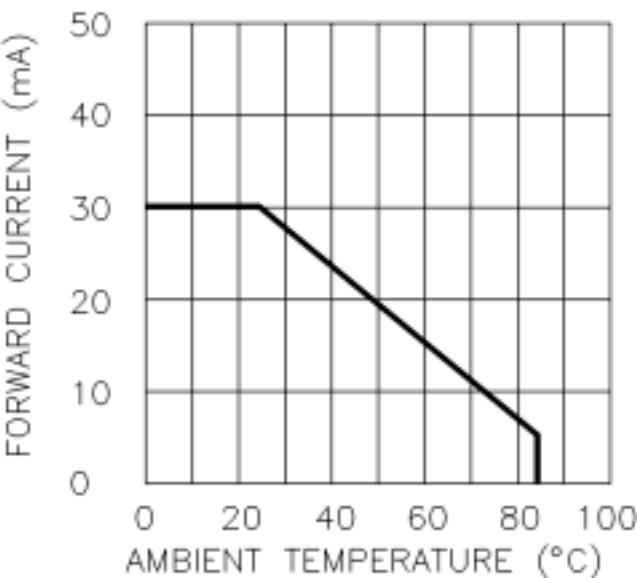

Forward Current vs. Ambient Temperature

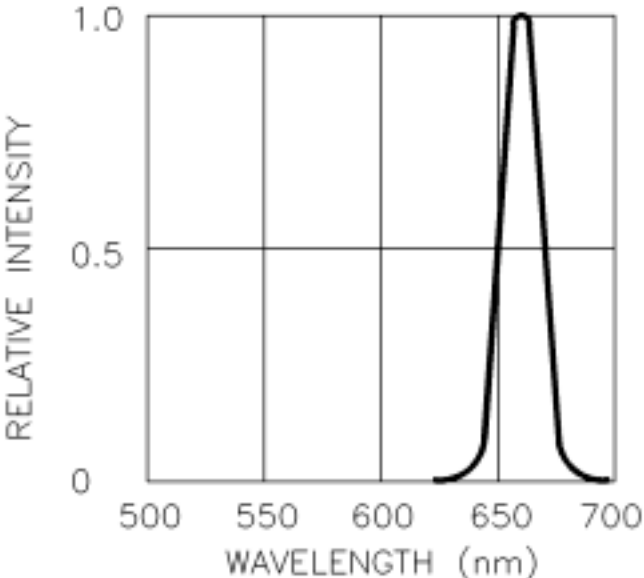

Relative Intensity vs. Wavelength