


# Centronic Connector Right Angle Type

## 57RA TYPE

### MALE

#### Specifications:


Shell: Steel Nickel Plated or Tin plated  
 Pin Contact: Phosphor Bronze Gold plated over nickel  
 Insulator: PBT & Glass-fiber reinforced UL-94V-0  
 Number Of Contact: 14, 24, 36, 50  
 Current Rating: 5 amp.  
 Dielectric Strength: 1000V for one minute  
 Insulator Resistance: 1000MΩ Min. at 500V DC  
 Temperature: -55°C ~ +105°C

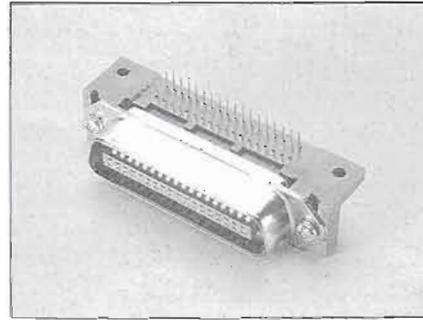


### FEMALE

#### Specifications:


Shell: Steel Nickel plated or Tin plated  
 Socket Contact: Phosphor bronze Gold plated over nickel  
 Insulator: PBT & Glass-fiber reinforced UL-94V-0  
 Number Of Contact: 14, 24, 36, 50  
 Current Rating: 5 amp.  
 Dielectric Strength: 1000V for one minute  
 Insulator Resistance: 1000MΩ Min. at 500V DC  
 Temperature: -55°C ~ +105°C

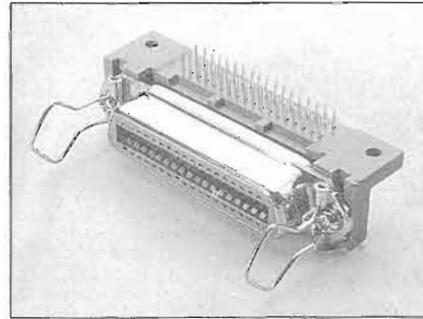

57-PR series

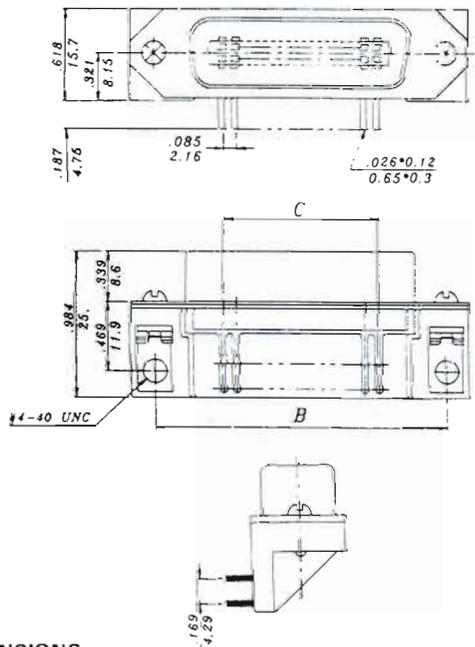

57-SR series

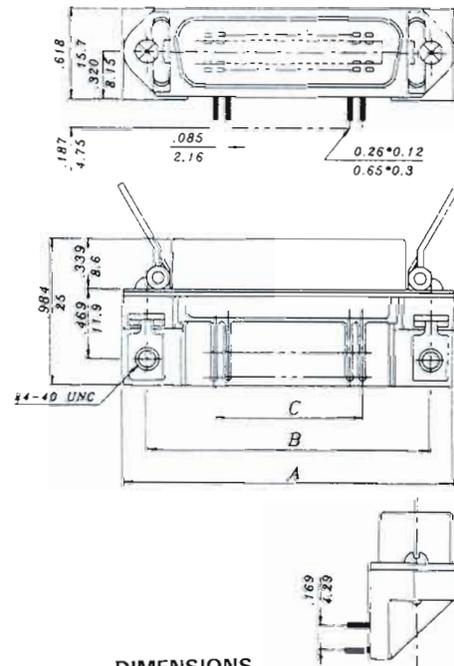

#### DIMENSIONS

Shell Size	A ±0.008 ±0.2	B ±0.008 ±0.02	C ±0.004 ±0.1
57-14PR	1.728 43.9	1.417 36.0	0.512 13.0
57-24PR	2.154 54.7	1.843 46.8	0.935 23.76
57-36PR	2.665 67.7	2.350 59.7	1.446 36.72
57-50PR	3.260 82.8	2.949 74.9	2.041 51.84

#### DIMENSIONS

Shell Size	A ±0.008 ±0.2	B ±0.008 ±0.02	C ±0.004 ±0.1
57-14SR	1.728 43.9	1.417 36.0	0.512 13.0
57-24SR	2.157 54.7	1.843 46.8	0.935 23.76
57-36SR	2.665 67.7	2.350 59.7	1.446 36.72
57-50SR	3.260 82.8	2.949 74.9	2.041 51.84