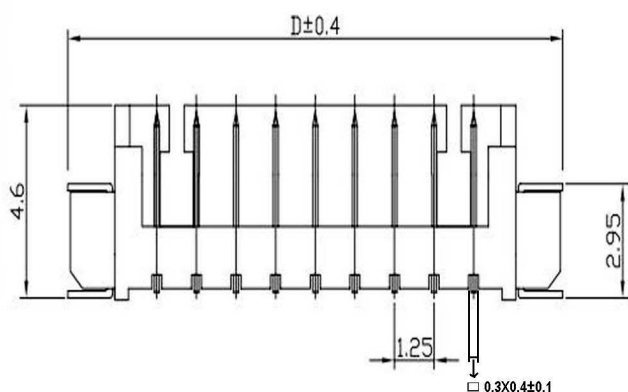
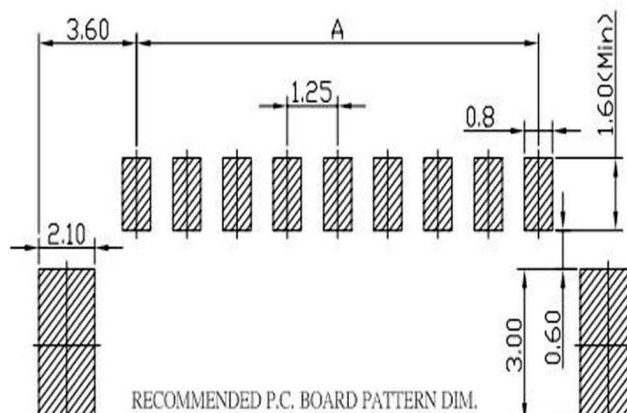
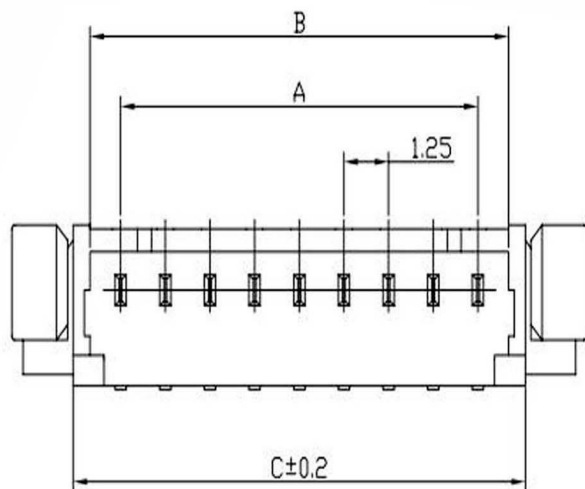


MATERIAL:

WAFER:HIGH TEMPERA TURE PLASTIC
 NYLON46 UL94V-0
 PIN:HIGH STRENGTH BRASS
 WITH TIN OVER NICKEL PLATED

SPECIFICATION:

Current Rating: 1A AC, DC
 Voltage Rating: 125V AC,DC
 Operating Temp.: -40°C ~ +85°C
 Insulation Resistance: 100MΩ/ min.
 Dielectric Withstanding Voltage: 250V AC/ minute
 Contact Resistance: 20mΩ/ max.

CKT.	A	B	C	D
2	1.25	3.05	4.25	7.65
3	2.50	4.30	5.50	8.90
4	3.75	5.55	6.75	10.15
5	5.00	6.80	8.00	11.40
6	6.25	8.05	9.25	12.65
7	7.50	9.30	10.50	13.90
8	8.75	10.56	11.75	15.15
9	10.00	11.80	13.00	16.40
10	11.25	13.05	14.25	17.65
11	12.50	14.30	15.50	18.90
12	13.75	15.55	16.75	20.15
13	15.00	16.80	18.00	21.40
14	16.25	18.05	19.25	22.65
15	17.50	19.30	20.50	23.90

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准 BETTY

DWG.
製圖 BETTY

DATE 制表日
2012/3/8

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差
.0 ±0.25
.00 ±0.15
ANG. ±

SIZE.
紙張尺寸 A 4

REV.
版次 B

PART NAME 品名
1.25mm WAFER 1XXP SMT TYPE
STRAIGHT(TOP ENTRY) TIN PLATING
BEIGE COLOR

PART NO.
料號 W1125-XXPATXC0R

