

F5158 = Product group; Product group discount F 51 5_

CONEC
Female Connectors DIN 41.612
Series: FL_PCF
IDC for Flat Cables
Pitch: 2,54mm

Features

- For flat cable connections using IDC technique
- Assembled rows a and c

Technical Specifications

Insulation Shell:.....Polyamide (UL94V-0)
Contact Material:.....CuSn
Contact Surface (Class 3):.....Gold Over Nickel
Operating Current:.....1,5A
Operating Voltage:.....330V AC/479V DC
Test Voltage:.....1000V
Contact Resistance:.....≤15mΩ
Insulation Resistance:.....≥10¹²Ω

Note

- FL64ZE strain relief must be ordered separately.
- Flat cables see at product group G1833.
- Suitable IDC crimping fixtures available in our red "Components & Devices" catalogue at product group T4651.

Additional Products

Class 1 and 2 available on request, delivery time approx. 4 weeks.

FL64ZE
Strain relief for FL64CF

Note


Must be ordered separately

Terms of Delivery


Minimum order quantity: 1 PKU = 5 pieces

Manufacturer: **CONEC**
http://www.conec.com


Part Nr.	Part description	PU	5 up.	25 up.	100 up.
FL64PCF	IDC Female f. Flat Cable A+C 64-Pole	E	5,70	4,50	3,90
FL64ZE	Strain Relief for FL64PCF	E	0,82	0,65	0,56

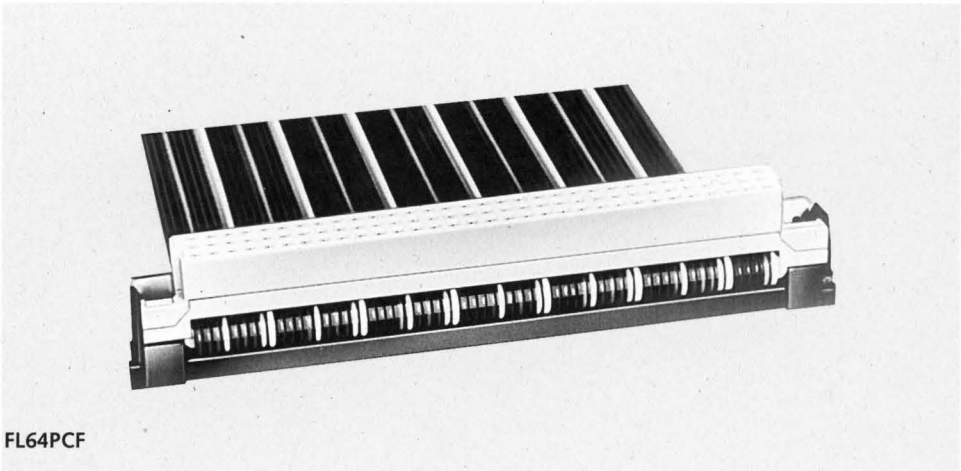

FL64PCF

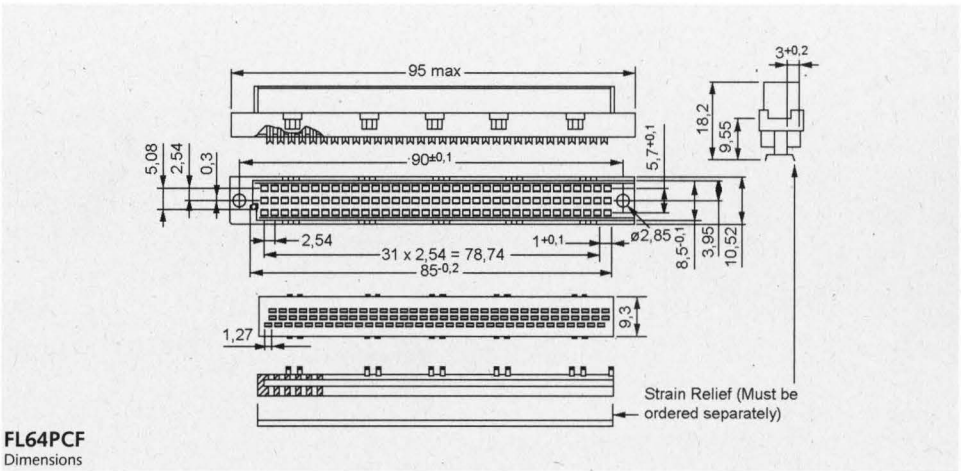

FL64PCF
Dimensions

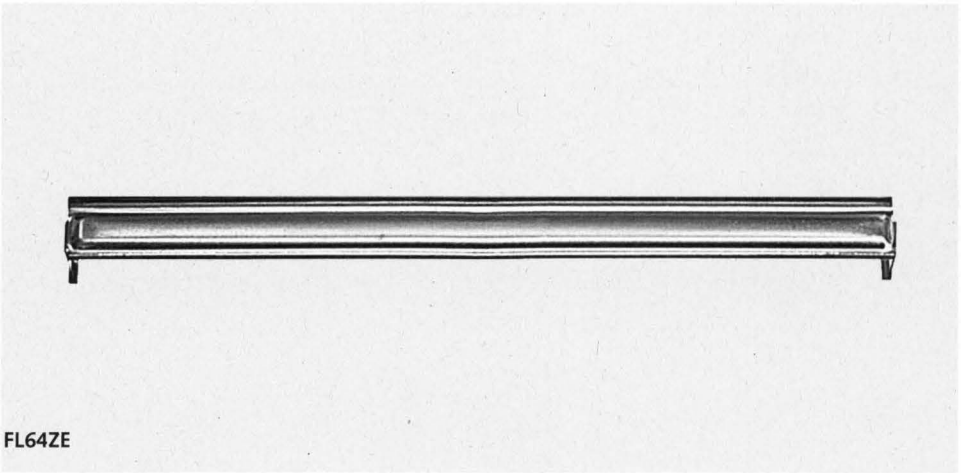

FL64ZE