
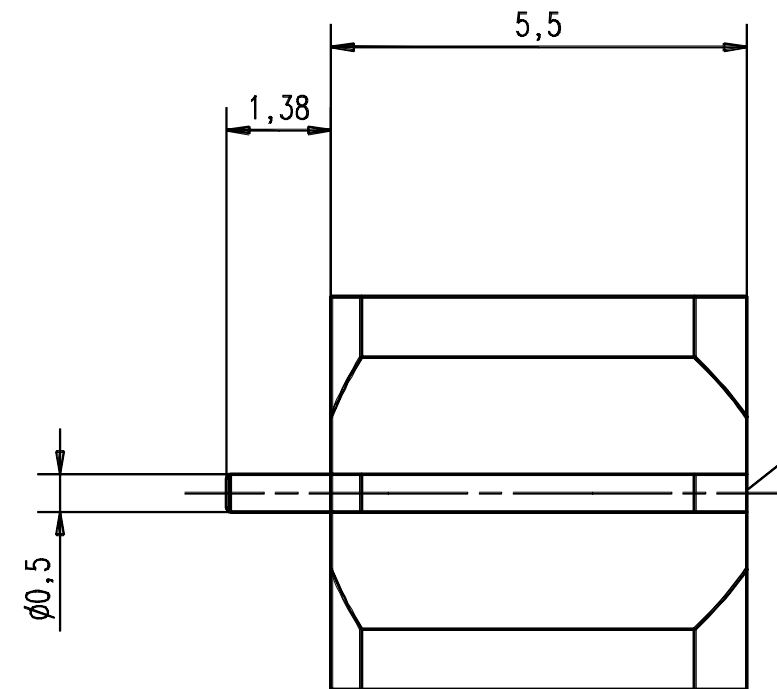


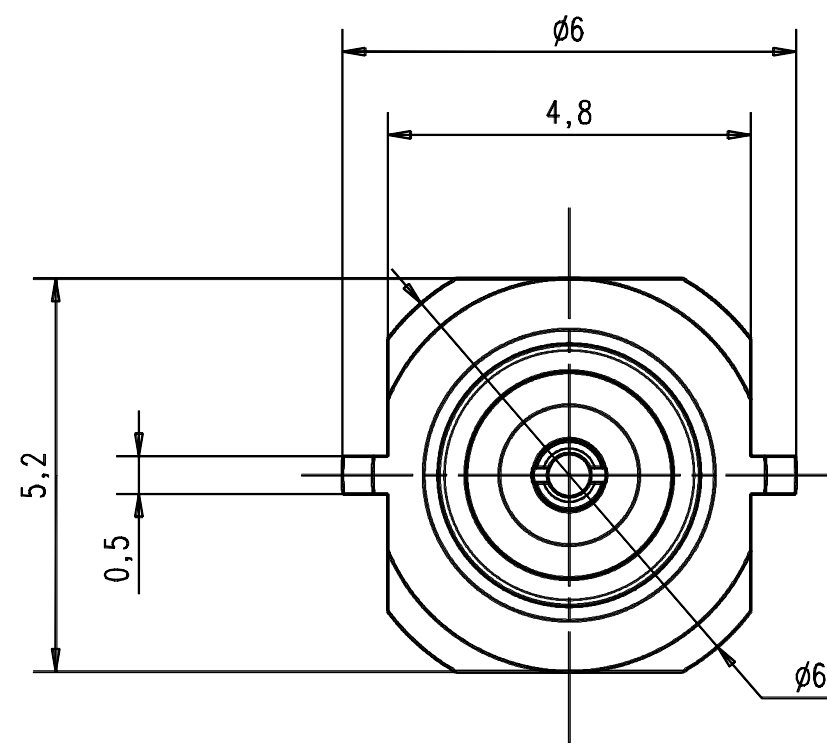

Steckbereich nach /
mating area acco. to
IEC 1169-36 G2

Verpackung:



Blistergurt: AGK-3818
Stk/Gurt : 1000
Stk/m : 83,3
Vorlauf : 0,3 m
Nachlauf : 0,4 m
Gurtlaenge : ca. 12,7 m
Spulenø : 330 mm

Packaging:

Tape and reel: AGK-3818
parts/reel : 1000
parts/m : 83,3
forward run : 0,3 m
after running: 0,4 m
length : appr. 12,7 m
reeldiameter : 330 mm

M/scale10:1

SMD-Lötflächen / Solderpat layout

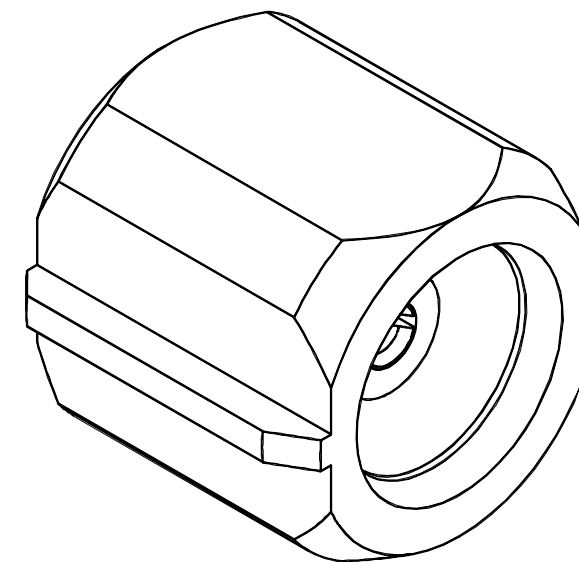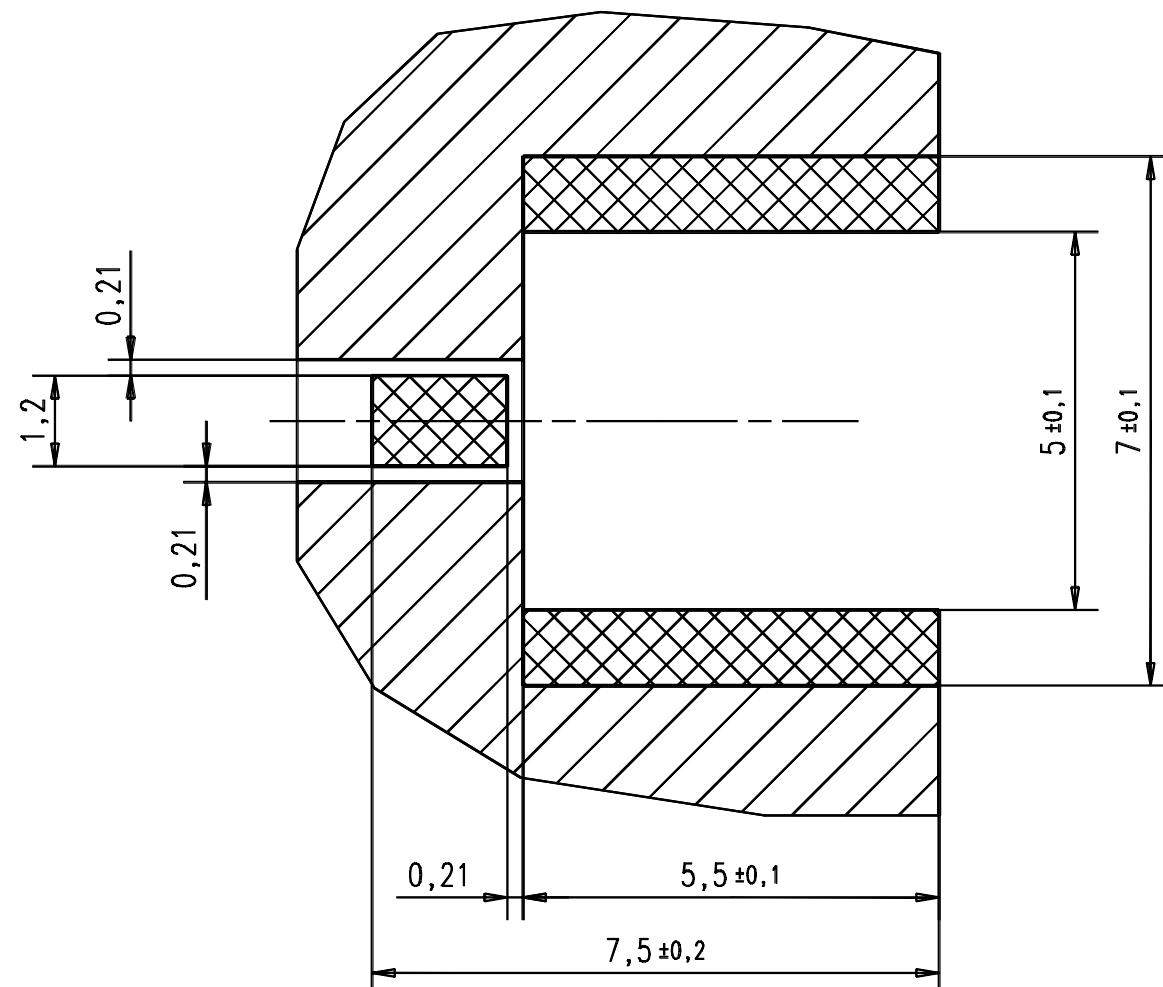

M/scale1:1



IMS CONNECTOR SYSTEMS					general tolerance ISO 2768 mH		scale: 10:1	
							Assembly instruction: Stripping dimension:	
Design	a	No tape & reel	15.07.03	RSc		date	name	
480/03	b	Tape and reel	19.11.03	Glatz	generate	10.07.03	Schwoer	
					checked			
					Norm			
					41920			
								
nr.	rev.	alteration	date	name				Rev. b
							Anbaubuchse Mount. jack	
							3700.01.2610.00'	