

# Cree® 5-mm Oval LED

## Model # LO5SMEPG4-B0G-A3

### Data Sheet

110-degree oval LED lamp in green color with tinted, diffused lens and stopper

#### Applications

- Full-Color Display

#### Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ )

Items	Symbol	Absolute Maximum Rating	Unit
Forward Current	$I_F$	25	mA
Peak Forward Current <small>Note</small>	$I_{FP}$	100	mA
Reverse Voltage	$V_R$	5	V
Power Dissipation	$P_D$	100	mW
Operation Temperature	$T_{opr}$	-40 ~ +95	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 ~ +100	$^\circ\text{C}$
Lead Soldering Temperature	$T_{sol}$	Max. 260 $^\circ\text{C}$ for 3 sec. max. (3 mm from the base of the epoxy bulb)	

**Note:** Pulse width  $\leq 0.1$  msec, duty  $\leq 1/10$ .

#### Typical Electrical & Optical Characteristics ( $T_A = 25^\circ\text{C}$ )


Characteristics	Symbol	Condition	Unit	Minimum	Typical	Maximum
Forward Voltage	$V_F$	$I_F = 20$ mA	V		3.4	4.0
Forward Voltage	$V_F$	$I_F = 1.0$ $\mu\text{A}$	V	1.7		2.5
Reverse Current	$I_R$	$V_R = 5$ V	$\mu\text{A}$			100
Dominant Wavelength	$\lambda_D$	$I_F = 20$ mA	nm	520	527	535
Luminous Intensity	$I_V$	$I_F = 20$ mA	mcd	2130	3500	
50% Power Angle	2 $\theta_{1/2}$ H-H	$I_F = 20$ mA	deg		110	
	2 $\theta_{1/2}$ V-V	$I_F = 20$ mA	deg		40	

**Standard Bins for LO5SMEPG4-B0G-A3 ( $I_f = 20 \text{ mA}$ )**

Lamps are sorted to luminous intensity ( $I_v$ ) and dominant wavelength ( $\lambda_D$ ) bins shown.

Orders for LO5SMEPG4-B0G-A3 may be filled with any or all bins contained as below.

All luminous intensity ( $I_v$ ) and dominant wavelength ( $\lambda_D$ ) values shown and specified are at  $I_f = 20 \text{ mA}$ .

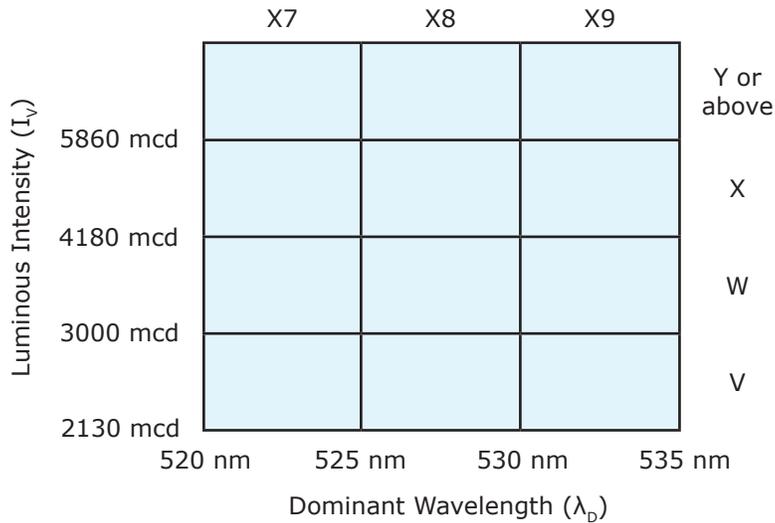

**Important Notes:**

1. All ranks will be included per delivery; rank ratio will be based on the dice distribution.
2. Pb content <1000 ppm.
3. Tolerance of measurement of luminous intensity is  $\pm 15\%$ .
4. Tolerance of measurement of dominant wavelength is  $\pm 1 \text{ nm}$ .
5. Tolerance of measurement of  $V_f$  is  $\pm 0.05 \text{ V}$ .
6. Packaging methods are available for selection; please refer to the "Cree LED Lamp Packaging Standard" document.
7. Please refer to the "Cree LED Lamp Reliability Test Standards" document for reliability test conditions.
8. Please refer to the "Cree LED Lamp Soldering & Handling" document for information about how to use this LED product safely.

**Graphs**

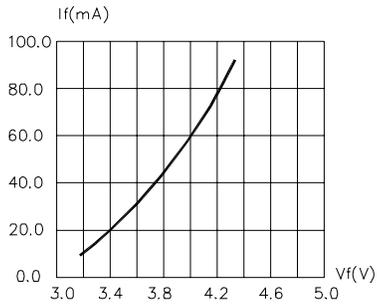


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE

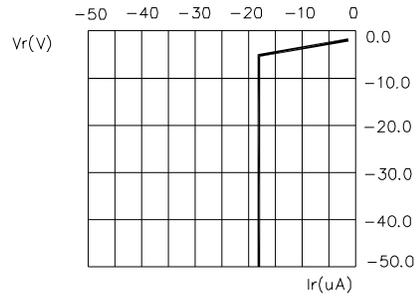


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE

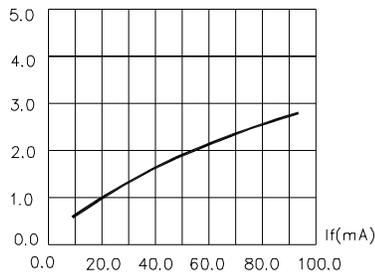


FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

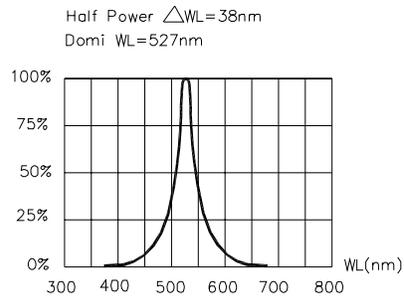


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH

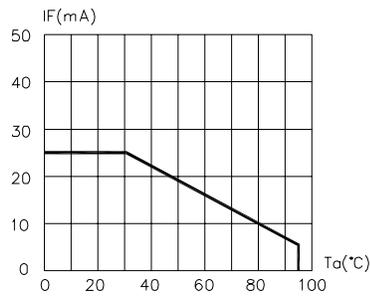


FIG.5 MAXIMUM FORWARD CURRENT VS. AMBIENT TEMPERATURE (Tjmax=105°C)

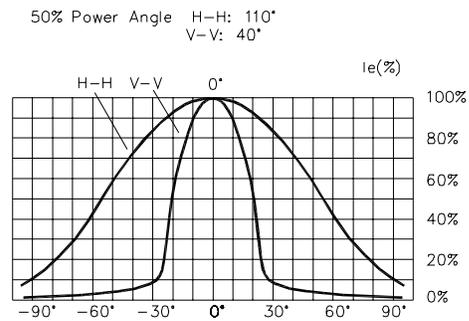



FIG.6 FAR FIELD PATTERN



## Kit Number System

Cree LED lamps are tested and sorted into performance bins. A bin is specified by ranges of color, forward voltage, and brightness. Sorted LEDs are packaged for shipping in various convenient options. Please refer to the "Cree LED Lamp Packaging Standard" document for more information about shipping and packaging options.

Cree LEDs are sold by order codes in combinations of bins called kits. Order codes are configured in the following manner:

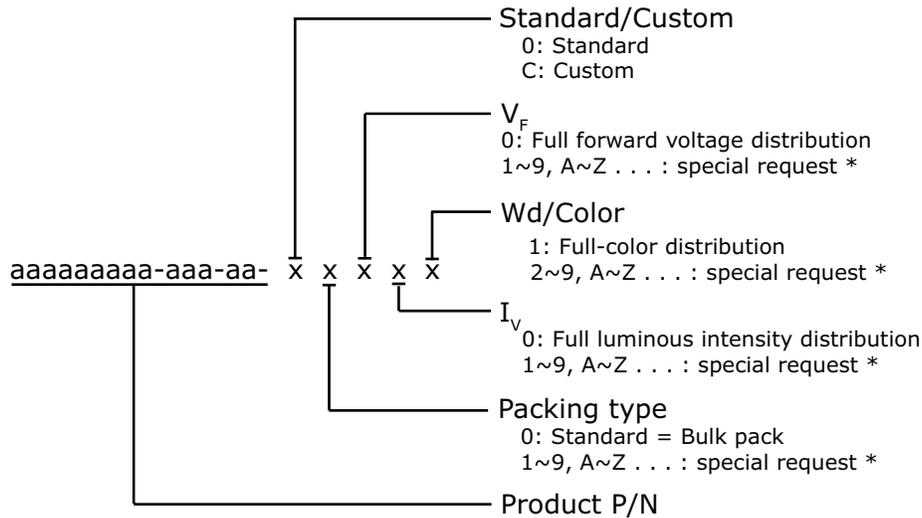

\* Contact your Cree sales representative for ordering information.

## Standard Available Kits\*

Kit Number	Description
LO5SMEPG4-B0G-A3-00001	5mm Oval 110 Green, Full Rank, Bulk Pack
LO5SMEPG4-B0G-A3-00002	5mm Oval 110 Green, IV: Full Rank, Hue: X7-X8, Bulk Pack
LO5SMEPG4-B0G-A3-00003	5mm Oval 110 Green, IV: Full Rank, Hue: X8-X9, Bulk Pack
LO5SMEPG4-B0G-A3-00014	5mm Oval 110 Green, Consecutive 4Q Iv bins of min V; 1 Hue from X7 - X9, Bulk Pack
LO5SMEPG4-B0G-A3-00015	5mm Oval 110 Green, Consecutive 4Q Iv bins of min V; 1 Hue from X7 - X8, Bulk Pack
LO5SMEPG4-B0G-A3-00016	5mm Oval 110 Green, Consecutive 4Q Iv bins of min V; 1 Hue from X8 - X9, Bulk Pack
LO5SMEPG4-B0G-A3-00024	5mm Oval 110 Green, Consecutive 4Q Iv bins of min V3; 1 Hue from X7 - X9, Bulk Pack
LO5SMEPG4-B0G-A3-00025	5mm Oval 110 Green, Consecutive 4Q Iv bins of min V3; 1 Hue from X7 - X8, Bulk Pack
LO5SMEPG4-B0G-A3-00026	5mm Oval 110 Green, Consecutive 4Q Iv bins of min V3; 1 Hue from X8 - X9, Bulk Pack
LO5SMEPG4-B0G-A3-00034	5mm Oval 110 Green, Consecutive 4Q Iv bins of min W; 1 Hue from X7 - X9, Bulk Pack

\* Please contact your Cree representative about the availability of non-standard kits.