


## Power Modules

### Encapsulated Miniature Batteries Two Pins Vertical

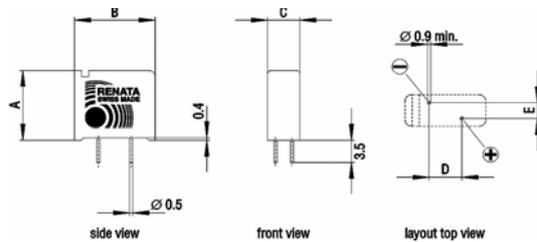

RENATA No.	Nominal capacity (mAh)	Nominal voltage (V)	Encapsulated cell	Weight (g)	Maximum dimensions (mm)				
					A	B	C	D	E
<b>320A</b>	30	3	CR927	1.11	11.0	12.5	5	5.08	2.54
<b>338A</b>	48	3	CR1225	1.69	13.5	15.0	5	7.60	2.54

Temperature range: - Operation -40°C to +70°C  
 Self discharge rate: - less than 1% per year at 25°C  
 Specifications: - module housings: polyamide 66  
 - soldering contacts: Isotan (55% Cu, 44% Ni-Mn)