




1

2

3

4

5

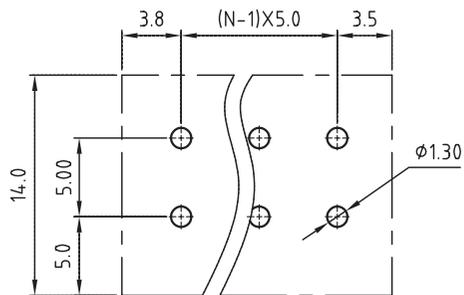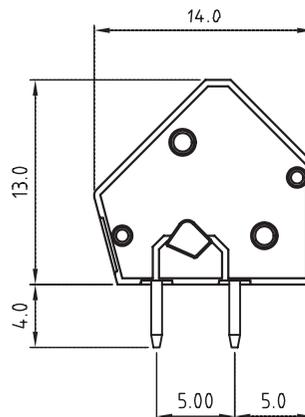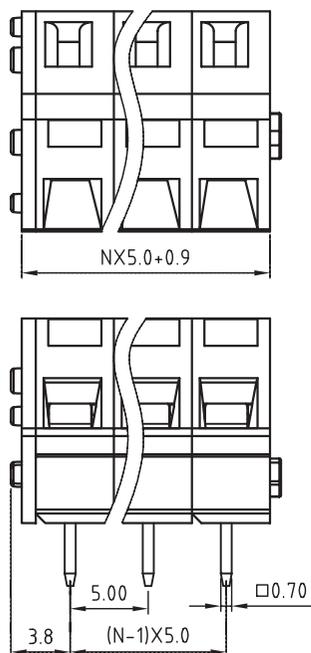

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: PA 66
 FLAMABILITY RATING: UL94-V0
 COLOR: GREY
 WIRE GUARD: STAINLESS STEEL
 CONTACT PIN: BRASS (CuZn)
 SOLDER TAIL PLATING: TIN

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 15A
 WORKING VOLTAGE: 300VAC
 WITHSTANDING VOLTAGE: 1.6KV
 CONTACT RESISTANCE: 20 mOhm MAX

WIRE RANGE:
 SOLID WIRE: 28-12 AWG / 0.08-3.0MM²
 STRANDED WIRE: 28-12 AWG / 0.08-3.0MM²
 WIRE STRIP LENGTH: 6-7 MM

MECHANICAL:
 PITCH: 5.0MM

SOLDERING: WAVE PROCESS ONLY


PACKAGING: BOX

SERIE 4137

CERTIFICATION: UNDER PROCESSING

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = +/- 0.2

.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW:

DESCRIPTION: SERIE 4137 - 5.00MM SCREWLESS 45° ENTRY
 3.0MM² WIRES WR-TBL

WERI PART NO: 691 413 720 0xx

SIZE

A4

G			
F			
E			
D			
C			
B	29-OCT-08	CHARACTERISTICS	JP
A	14-NOV-07	PDF	CH
REV	DATE	FILE	BY