

# Mini Size .098" (2.50mm) Center Crimp Terminal Housing



## HS Series

### Features:

- 2-20 Circuits
- Friction lock
- Nylon (UL 94V-0)
- Accepts double cantilever crimp terminal

### Specifications:

- Current rating: 3A AC DC
- Voltage rating: 250V AC Maximum
- Temperature range: -25°C ~ +90°C
- Contact resistance: Initial Value/10mΩ max.  
After environmental testing/20mΩ max.
- Insulation resistance: 1,000 MΩ min
- Withstand Voltage: 1500V AC/minute
- Applicable wires: AWG #30-#22

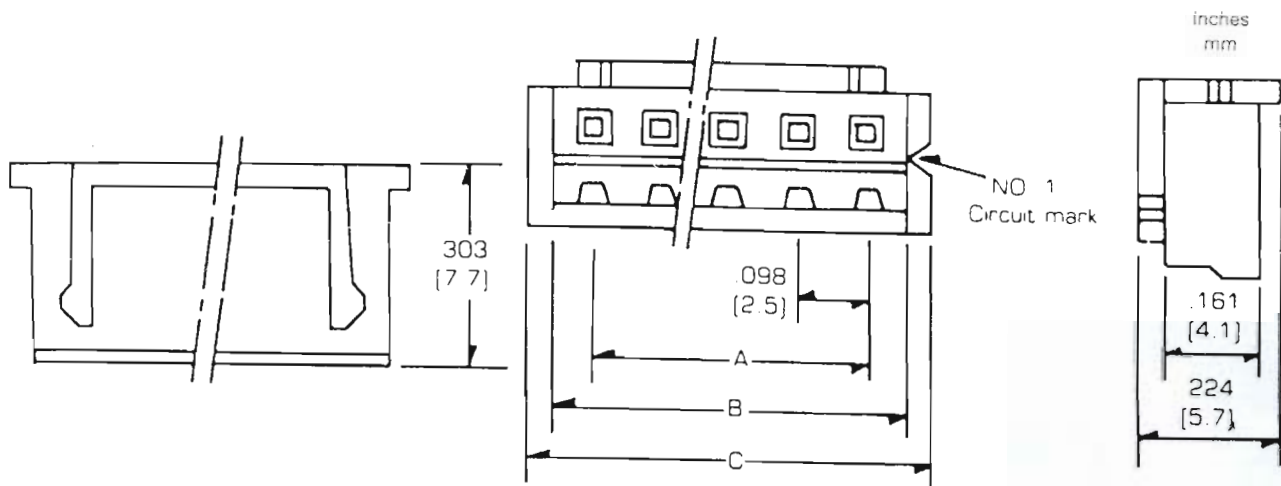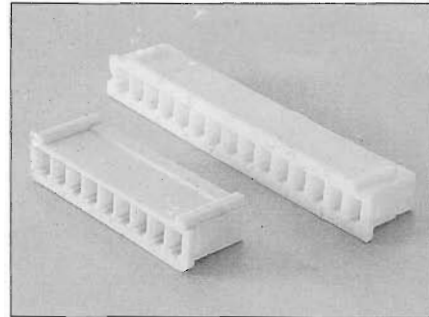

### Dimensional Information HS Series

Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C	Circuits	Dim. A	Dim. B	Dim. C
HS-2	.098 2.5	.224 5.7	.287 7.3	HS-9	.787 20.0	.913 23.2	.976 24.8	HS-16	1.476 37.5	1.602 40.7	1.665 42.3
HS-3	.197 5.0	.323 8.2	.386 9.8	HS-10	.886 22.5	1.012 25.7	1.075 27.3	HS-17	1.574 40.0	1.700 43.2	1.763 44.8
HS-4	.295 7.5	.421 10.7	.484 12.3	HS-11	.984 25.0	1.110 28.2	1.173 29.8	HS-18	1.673 42.5	1.799 45.7	1.862 47.3
HS-5	.394 10.0	.520 13.2	.583 14.8	HS-12	1.083 27.5	1.209 30.7	1.272 32.3	HS-19	1.772 45.0	1.897 48.2	1.960 49.8
HS-6	.492 12.5	.618 15.7	.681 17.3	HS-13	1.181 30.0	1.307 33.2	1.370 34.8	HS-20	1.870 47.5	1.996 50.7	2.059 52.3
HS-7	.591 15.0	.717 18.2	.780 19.8	HS-14	1.280 32.5	1.406 35.7	1.469 37.3				
HS-8	.689 17.5	.815 20.7	.878 22.3	HS-15	1.378 35.0	1.504 38.2	1.567 39.8				