


C24

CL23B series

塑料外壳金属化聚酯膜叠片式电容器(P=5.0mm)

Metallized polyester film capacitor (Stacked version,box-type)

■ 外形图 Outline Drawing

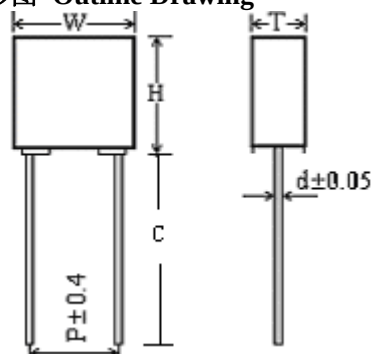

■ 特点

- 金属化聚酯膜，叠片式结构
- 塑料外壳（UL94 V-0），阻燃环氧填充
- 抗脉冲能力强

■ 主要用途：

- 旁路，隔直，耦合，退耦
- 脉冲，逻辑，定时，电路振荡器
- LCD 监视器整流，汽车直流马达抑制干扰

■ 技术要求 Specifications

■ Features

- metallized polyester film, stacked construction
- Plastic case（UL94 V-0），Epoxy resin sealing
- High dv/dt ability

■ Typical Applications:

- by-passing,blocking,coupling,decoupling,
 - pulse, logic,timing,oscillator circuits.
- Inverter for LCD monitors,automotive DC motor suppression

引用标准 Reference Standard	GB 7332(IEC 60384-2)		
气候类别 Climatic Category	55/100/56		
额定温度 Rated temperature	85℃		
工作温度 Operating temperature	-55℃~105℃ (+85℃ to +105℃: decreasing factor 1.25% per °C for VR(dc))		
额定电压 Rated Voltage	50/63V、100V、250V、400V、500V、630V、700V		
电容量范围 Capacitance Range	0.0010 μ F ~ 2.2 μ F		
电容量偏差 Capacitance Tolerance	± 5%(J)、± 10%(K)、± 20%(M)		
耐电压 Voltage Proof	I型: 1.6U _R (5s)、II型: 1.4U _R (5s)		
损耗角正切 Dissipation Factor	测试频率 Frequency	C _R ≤ 0.1 μ F	C _R > 0.1 μ F
	1kHz	≤1.0%	≤1.0%
	10kHz	≤1.5%	≤1.5%
	100kHz	≤3.0%	-
绝缘电阻 Insulation Resistance	U _R >100V	≥30 000M Ω, C _R ≤0.33 μ F (20℃,100V,1min) ≥10 000 s, C _R >0.33 μ F	
	U _R ≤100V	≥15 000M Ω, C _R ≤0.33 μ F (20℃,10V,1min) ≥5 000s, C _R >0.33 μ F	
最大脉冲爬升速率Maximum Pulse Rise Time(dv/dt): 若实际工作电压U比额定电压U _R 低,电容器可工作在更高的dv/dt 场合。这样dv/dt允许值应为右表值乘以U _R /U。 If the working voltage(U) is lower than the rated voltage(U _R),the capacitor can be worked at a higher dv/dt. In this case, the maximum allowed dv/dt is obtain by multiplying the right value with U _R /U.	U _R (V)		dv/dt (V/ μ s)
	50/63		250
	100		300
	250		400
	400		600
	500		700
	630		800
	700		850



产品编码说明 Part number code system

15 位产品代码如下:

The 15 digits part number is formed as follow:

C24 Pattern I (High performance)

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

C	2	4							2	0				
---	---	---	--	--	--	--	--	--	---	---	--	--	--	--

C24 Pattern II (Reduced size)

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

C	2	4							2	S				
---	---	---	--	--	--	--	--	--	---	---	--	--	--	--

第 1~3 位 薄膜电容器的系列代码
C24= CL23B

Digit 1 to 3 Series code of film capacitor
C24= CL23B

第 4~5 位 直流额定电压
1H=50V 1J=63V 2A=100V 2E=250V
2G=400V 2H=500V 2J=630V 1V=700V

Digit 4 to 5 DC rated voltage
1H=50V 1J=63V 2A=100V 2E=250V
2G=400V 2H=500V 2J=630V 1V=700V

第 6~8 位 标称容量
举例: $103=10 \times 10^3 \text{pF}=0.01\mu\text{F}$

Digit 6 to 8 Rated capacitance value
for example : $103=10 \times 10^3 \text{pF}=0.01\mu\text{F}$

第 9 位 容量偏差
J=±5%,K=±10%, M=±20%

Digit 9 Capacitance tolerance
J=±5%,K=±10%, M=±20%

第 10 位 引线脚距 P
2=5.0mm

Digit 10 Pitch
2=5.0mm

第 11 位 内部特征码


Digit 11 Internal use

第 12~15 位 引线加工和包装代码

Digit 12 to 15 Lead form and packing code

Table 1 引线加工和包装代码 lead form and packing code

第 12 位 Digit 12		第 13 位 Digit 13		第 14 位 Digit 14		第 15 位 Digit 15	
代码 code	说明 explanation	代码 code	说明 explanation	代码 code	说明 explanation	代码 code	说明 explanation
A R	弹带包装 ammo-pack 圆盘包装 reel-pack	2	F=5.0mm	0 1	表示直脚 straight 表示弯脚 kinked	1	产品在连续的两个载带孔之间 each cap. among two consecutive holes P3=12.7mm,H=18.5mm (For pitch=5mm) (Detail parameter refer to catalogue pag 12)
F	引线成型 lead kinked	2	F=5.0mm	0	B=4.5mm (the length of B)	0	B 的长度偏差±0.5mm B Length tolerance ±0.5mm (Detail parameter refer to catalogue pag10)
C	直脚 straight lead “C” in the figure above	代码 code	说明 explanation	0		引线长度偏差±0.5mm 或标准长度 Length tolerance ±0.5mm Or standard length	
		00 45	标准的引线长度(18mm~22mm) standard lead length 引线长度 4.5mm lead length 4.5mm (refer to the figure above)				



C24

CL23B series

外形尺寸 Dimensions(mm)

电容器厚度 (Capacitor Thickness) T	≤3.5	>3.5
外形尺寸偏差 Dimension Tolerance (W, H, T)	±0.2	±0.4

I 型 (大尺寸) Pattern I (High performance)

50 Vdc (30Vac)/63Vdc (40Vac) [#]							100Vdc (63Vac)							250V dc (160Vac)						
容量 (μF)	W	H	T	P	d	产品代码 Part number	容量 (μF)	W	H	T	P	d	产品代码 Part number	容量 (μF)	W	H	T	P	d	产品代码 Part number
0.0010	7.2	6.5	2.5	5.0	0.5	C241J102+20****	0.0010	7.2	6.5	2.5	5.0	0.5	C242A102+20****	0.0010	7.2	6.5	2.5	5.0	0.5	C242E102+20****
0.0012	7.2	6.5	2.5	5.0	0.5	C241J122+20****	0.0012	7.2	6.5	2.5	5.0	0.5	C242A122+20****	0.0012	7.2	6.5	2.5	5.0	0.5	C242E122+20****
0.0015	7.2	6.5	2.5	5.0	0.5	C241J152+20****	0.0015	7.2	6.5	2.5	5.0	0.5	C242A152+20****	0.0015	7.2	6.5	2.5	5.0	0.5	C242E152+20****
0.0018	7.2	6.5	2.5	5.0	0.5	C241J182+20****	0.0018	7.2	6.5	2.5	5.0	0.5	C242A182+20****	0.0018	7.2	6.5	2.5	5.0	0.5	C242E182+20****
0.0022	7.2	6.5	2.5	5.0	0.5	C241J222+20****	0.0022	7.2	6.5	2.5	5.0	0.5	C242A222+20****	0.0022	7.2	6.5	2.5	5.0	0.5	C242E222+20****
0.0027	7.2	6.5	2.5	5.0	0.5	C241J272+20****	0.0027	7.2	6.5	2.5	5.0	0.5	C242A272+20****	0.0027	7.2	6.5	2.5	5.0	0.5	C242E272+20****
0.0033	7.2	6.5	2.5	5.0	0.5	C241J332+20****	0.0033	7.2	6.5	2.5	5.0	0.5	C242A332+20****	0.0033	7.2	6.5	2.5	5.0	0.5	C242E332+20****
0.0039	7.2	6.5	2.5	5.0	0.5	C241J392+20****	0.0039	7.2	6.5	2.5	5.0	0.5	C242A392+20****	0.0039	7.2	6.5	2.5	5.0	0.5	C242E392+20****
0.0047	7.2	6.5	2.5	5.0	0.5	C241J472+20****	0.0047	7.2	6.5	2.5	5.0	0.5	C242A472+20****	0.0047	7.2	6.5	2.5	5.0	0.5	C242E472+20****
0.0056	7.2	6.5	2.5	5.0	0.5	C241J562+20****	0.0056	7.2	6.5	2.5	5.0	0.5	C242A562+20****	0.0056	7.2	6.5	2.5	5.0	0.5	C242E562+20****
0.0068	7.2	6.5	2.5	5.0	0.5	C241J682+20****	0.0068	7.2	6.5	2.5	5.0	0.5	C242A682+20****	0.0068	7.2	6.5	2.5	5.0	0.5	C242E682+20****
0.0082	7.2	6.5	2.5	5.0	0.5	C241J822+20****	0.0082	7.2	6.5	2.5	5.0	0.5	C242A822+20****	0.0082	7.2	6.5	2.5	5.0	0.5	C242E822+20****
0.010	7.2	6.5	2.5	5.0	0.5	C241J103+20****	0.010	7.2	6.5	2.5	5.0	0.5	C242A103+20****	0.010	7.2	6.5	2.5	5.0	0.5	C242E103+20****
0.012	7.2	6.5	2.5	5.0	0.5	C241J123+20****	0.012	7.2	6.5	2.5	5.0	0.5	C242A123+20****	0.012	7.2	6.5	2.5	5.0	0.5	C242E123+20****
0.015	7.2	6.5	2.5	5.0	0.5	C241J153+20****	0.015	7.2	6.5	2.5	5.0	0.5	C242A153+20****	0.015	7.2	6.5	2.5	5.0	0.5	C242E153+20****
0.018	7.2	6.5	2.5	5.0	0.5	C241J183+20****	0.018	7.2	6.5	2.5	5.0	0.5	C242A183+20****	0.018	7.2	6.5	2.5	5.0	0.5	C242E183+20****
0.022	7.2	6.5	2.5	5.0	0.5	C241J223+20****	0.022	7.2	6.5	2.5	5.0	0.5	C242A223+20****	0.022	7.2	7.5	3.5	5.0	0.5	C242E223+20****
0.027	7.2	6.5	2.5	5.0	0.5	C241J273+20****	0.027	7.2	6.5	2.5	5.0	0.5	C242A273+20****	0.027	7.2	7.5	3.5	5.0	0.5	C242E273+20****
0.033	7.2	6.5	2.5	5.0	0.5	C241J333+20****	0.033	7.2	6.5	2.5	5.0	0.5	C242A333+20****	0.033	7.2	7.5	3.5	5.0	0.5	C242E333+20****
0.039	7.2	6.5	2.5	5.0	0.5	C241J393+20****	0.039	7.2	6.5	2.5	5.0	0.5	C242A393+20****	0.039	7.2	7.5	3.5	5.0	0.5	C242E393+20****
0.047	7.2	6.5	2.5	5.0	0.5	C241J473+20****	0.047	7.2	6.5	2.5	5.0	0.5	C242A473+20****	0.047	7.2	9.5	4.5	5.0	0.6	C242E473+20****
0.056	7.2	6.5	2.5	5.0	0.5	C241J563+20****	0.056	7.2	6.5	2.5	5.0	0.5	C242A563+20****	0.056	7.2	9.5	4.5	5.0	0.6	C242E563+20****
0.068	7.2	6.5	2.5	5.0	0.5	C241J683+20****	0.068	7.2	6.5	2.5	5.0	0.5	C242A683+20****	0.068	7.2	9.5	4.5	5.0	0.6	C242E683+20****
0.082	7.2	6.5	2.5	5.0	0.5	C241J823+20****	0.082	7.2	6.5	2.5	5.0	0.5	C242A823+20****	0.082	7.2	10.0	5.0	5.0	0.6	C242E823+20****
0.10	7.2	6.5	2.5	5.0	0.5	C241J104+20****	0.10	7.2	7.5	3.5	5.0	0.5	C242A104+20****	0.10	7.2	10.0	5.0	5.0	0.6	C242E104+20****
0.12	7.2	6.5	2.5	5.0	0.5	C241J124+20****	0.12	7.2	9.5	4.5	5.0	0.6	C242A124+20****	0.12	7.2	11.0	6.0	5.0	0.6	C242E124+20****
0.15	7.2	7.5	3.5	5.0	0.5	C241J154+20****	0.15	7.2	9.5	4.5	5.0	0.6	C242A154+20****	0.15	7.2	11.0	6.0	5.0	0.6	C242E154+20****
0.18	7.2	7.5	3.5	5.0	0.5	C241J184+20****	0.18	7.2	9.5	4.5	5.0	0.6	C242A184+20****							
0.22	7.2	7.5	3.5	5.0	0.5	C241J224+20****	0.22	7.2	10.0	5.0	5.0	0.6	C242A224+20****							
0.27	7.2	9.5	4.5	5.0	0.6	C241J274+20****	0.27	7.2	10.0	5.0	5.0	0.6	C242A274+20****							
0.33	7.2	9.5	4.5	5.0	0.6	C241J334+20****	0.33	7.2	11.0	6.0	5.0	0.6	C242A334+20****							
0.39	7.2	9.5	4.5	5.0	0.6	C241J394+20****	0.39	7.2	11.0	6.0	5.0	0.6	C242A394+20****							
0.47	7.2	10.0	5.0	5.0	0.6	C241J474+20****	0.47	7.2	11.0	6.0	5.0	0.6	C242A474+20****							
0.56	7.2	10.0	5.0	5.0	0.6	C241J564+20****	0.56	7.2	11.0	6.0	5.0	0.6	C242A564+20****							
0.68	7.2	11.0	6.0	5.0	0.6	C241J684+20****														
0.82	7.2	11.0	6.0	5.0	0.6	C241J824+20****														
1.0	7.2	11.0	6.0	5.0	0.6	C241J105+20****														

备注: 1.“+”表示容量偏差。 “+”=capacitance tolerance code, M=±20%,K=±10%,J=±5%

2.“****”表示引线加工和包装代码 (见 table 1)。 “****”=lead form and packing code (refer to table 1)

3.“#”当额定电压为 50VDC 时, 第 4~5 位是 1H。 “#”when the rated voltage is 50VDC,the digit 4~5 is 1H.




I 型 (大尺寸) Pattern I (High performance)

400Vdc (200Vac)							500Vdc (220Vac)							630V dc (220Vac)						
容量 (μ F)	W	H	T	P	d	产品代码 Part number	容量 (μ F)	W	H	T	P	d	产品代码 Part number	容量 (μ F)	W	H	T	P	d	产品代码 Part number
0.0010	7.2	6.5	2.5	5.0	0.5	C242G102+20****	0.0010	7.2	6.5	2.5	5.0	0.5	C242H102+20****	0.0010	7.2	6.5	2.5	5.0	0.5	C242J102+20****
0.0012	7.2	6.5	2.5	5.0	0.5	C242G122+20****	0.0012	7.2	6.5	2.5	5.0	0.5	C242H122+20****	0.0012	7.2	6.5	2.5	5.0	0.5	C242J122+20****
0.0015	7.2	6.5	2.5	5.0	0.5	C242G152+20****	0.0015	7.2	6.5	2.5	5.0	0.5	C242H152+20****	0.0015	7.2	6.5	2.5	5.0	0.5	C242J152+20****
0.0018	7.2	6.5	2.5	5.0	0.5	C242G182+20****	0.0018	7.2	6.5	2.5	5.0	0.5	C242H182+20****	0.0018	7.2	7.5	3.5	5.0	0.5	C242J182+20****
0.0022	7.2	6.5	2.5	5.0	0.5	C242G222+20****	0.0022	7.2	6.5	2.5	5.0	0.5	C242H222+20****	0.0022	7.2	7.5	3.5	5.0	0.5	C242J222+20****
0.0027	7.2	6.5	2.5	5.0	0.5	C242G272+20****	0.0027	7.2	6.5	2.5	5.0	0.5	C242H272+20****	0.0027	7.2	7.5	3.5	5.0	0.5	C242J272+20****
0.0033	7.2	6.5	2.5	5.0	0.5	C242G332+20****	0.0033	7.2	7.5	3.5	5.0	0.5	C242H332+20****	0.0033	7.2	7.5	3.5	5.0	0.5	C242J332+20****
0.0039	7.2	6.5	2.5	5.0	0.5	C242G392+20****	0.0039	7.2	7.5	3.5	5.0	0.5	C242H392+20****	0.0039	7.2	7.5	3.5	5.0	0.5	C242J392+20****
0.0047	7.2	6.5	2.5	5.0	0.5	C242G472+20****	0.0047	7.2	7.5	3.5	5.0	0.5	C242H472+20****	0.0047	7.2	9.5	4.5	5.0	0.6	C242J472+20****
0.0056	7.2	7.5	3.5	5.0	0.5	C242G562+20****	0.0056	7.2	7.5	3.5	5.0	0.5	C242H562+20****	0.0056	7.2	9.5	4.5	5.0	0.6	C242J562+20****
0.0068	7.2	7.5	3.5	5.0	0.5	C242G682+20****	0.0068	7.2	9.5	4.5	5.0	0.6	C242H682+20****	0.0068	7.2	9.5	4.5	5.0	0.6	C242J682+20****
0.0082	7.2	7.5	3.5	5.0	0.5	C242G822+20****	0.0082	7.2	9.5	4.5	5.0	0.6	C242H822+20****	0.0082	7.2	9.5	4.5	5.0	0.6	C242J822+20****
0.010	7.2	7.5	3.5	5.0	0.5	C242G103+20****	0.010	7.2	9.5	4.5	5.0	0.6	C242H103+20****	0.010	7.2	10.0	5.0	5.0	0.6	C242J103+20****
0.012	7.2	9.5	4.5	5.0	0.6	C242G123+20****	0.012	7.2	9.5	4.5	5.0	0.6	C242H123+20****	0.012	7.2	11.0	6.0	5.0	0.6	C242J123+20****
0.015	7.2	9.5	4.5	5.0	0.6	C242G153+20****	0.015	7.2	10.0	5.0	5.0	0.6	C242H153+20****	0.015	7.2	11.0	6.0	5.0	0.6	C242J153+20****
0.018	7.2	9.5	4.5	5.0	0.6	C242G183+20****	0.018	7.2	11.0	6.0	5.0	0.6	C242H183+20****	0.018	7.2	11.0	6.0	5.0	0.6	C242J183+20****
0.022	7.2	10.0	5.0	5.0	0.6	C242G223+20****	0.022	7.2	11.0	6.0	5.0	0.6	C242H223+20****							
0.027	7.2	11.0	6.0	5.0	0.6	C242G273+20****	0.027	7.2	11.0	6.0	5.0	0.6	C242H273+20****							
0.033	7.2	11.0	6.0	5.0	0.6	C242G333+20****														
0.039	7.2	11.0	6.0	5.0	0.6	C242G393+20****														
0.047	7.2	11.0	6.0	5.0	0.6	C242G473+20****														

备注: 1.“+”表示容量偏差。 “+”=capacitance tolerance code, M=±20%,K=±10%,J=±5%

2.“****”表示引线加工和包装代码 (见 table 1)。“****”=lead form and packing code (refer to table 1)



C24

CL23B series

II 型(小尺寸) Pattern II (Reduced sizes)

50 Vdc (30Vac)/63Vdc (40Vac) [#]							100Vdc(63Vac)							250Vdc(140Vac)						
容量 (μF)	W	H	T	P	d	产品代码 Part number	容量 (μF)	W	H	T	P	d	产品代码 Part number	容量 (μF)	W	H	T	P	d	产品代码 Part number
0.15	7.2	6.5	2.5	5.0	0.5	C241J154+2S****	0.10	7.2	6.5	2.5	5.0	0.5	C242A104+2S****	0.022	7.2	6.5	2.5	5.0	0.5	C242E223+2S****
0.18	7.2	6.5	2.5	5.0	0.5	C241J184+2S****	0.12	7.2	6.5	2.5	5.0	0.5	C242A124+2S****	0.027	7.2	6.5	2.5	5.0	0.5	C242E273+2S****
0.22	7.2	6.5	2.5	5.0	0.5	C241J224+2S****	0.15	7.2	7.5	3.5	5.0	0.5	C242A154+2S****	0.033	7.2	6.5	2.5	5.0	0.5	C242E333+2S****
0.27	7.2	6.5	2.5	5.0	0.5	C241J274+2S****	0.18	7.2	7.5	3.5	5.0	0.5	C242A184+2S****	0.039	7.2	7.5	3.5	5.0	0.5	C242E393+2S****
0.33	7.2	7.5	3.5	5.0	0.5	C241J334+2S****	0.22	7.2	7.5	3.5	5.0	0.5	C242A224+2S****	0.047	7.2	7.5	3.5	5.0	0.5	C242E473+2S****
0.39	7.2	7.5	3.5	5.0	0.5	C241J394+2S****	0.27	7.2	9.5	4.5	5.0	0.6	C242A274+2S****	0.056	7.2	7.5	3.5	5.0	0.5	C242E563+2S****
0.47	7.2	7.5	3.5	5.0	0.5	C241J474+2S****	0.33	7.2	9.5	4.5	5.0	0.6	C242A334+2S****	0.068	7.2	7.5	3.5	5.0	0.5	C242E683+2S****
0.56	7.2	9.5	4.5	5.0	0.6	C241J564+2S****	0.39	7.2	9.5	4.5	5.0	0.6	C242A394+2S****	0.082	7.2	9.5	4.5	5.0	0.6	C242E823+2S****
0.68	7.2	9.5	4.5	5.0	0.6	C241J684+2S****	0.47	7.2	10.0	5.0	5.0	0.6	C242A474+2S****	0.10	7.2	9.5	4.5	5.0	0.6	C242E104+2S****
0.82	7.2	9.5	4.5	5.0	0.6	C241J824+2S****	0.56	7.2	10.0	5.0	5.0	0.6	C242A564+2S****	0.12	7.2	9.5	4.5	5.0	0.6	C242E124+2S****
1.0	7.2	10.0	5.0	5.0	0.6	C241J105+2S****	0.68	7.2	11.0	6.0	5.0	0.6	C242A684+2S****	0.15	7.2	10.0	5.0	5.0	0.6	C242E154+2S****
1.5	7.2	11.0	6.0	5.0	0.6	C241J155+2S****	0.82	7.2	11.0	6.0	5.0	0.6	C242A824+2S****	0.18	7.2	11.0	6.0	5.0	0.6	C242E184+2S****
2.2	7.2	11.0	6.0	5.0	0.6	C241J225+2S****	1.0	7.2	11.0	6.0	5.0	0.6	C242A105+2S****	0.22	7.2	11.0	6.0	5.0	0.6	C242E224+2S****

400Vdc (160Vac)							500/630Vdc (220Vac) [#]							700V dc (250Vac)						
容量 (μF)	W	H	T	P	d	产品代码 Part number	容量 (μF)	W	H	T	P	d	产品代码 Part number	容量 (μF)	W	H	T	P	d	产品代码 Part number
0.0056	7.2	6.5	2.5	5.0	0.5	C242G562+2S****	0.0018	7.2	6.5	2.5	5.0	0.5	C242J182+2S****	0.0010	7.2	6.5	2.5	5.0	0.5	C241V102+2S****
0.0068	7.2	6.5	2.5	5.0	0.5	C242G682+2S****	0.0022	7.2	6.5	2.5	5.0	0.5	C242J222+2S****	0.0012	7.2	6.5	2.5	5.0	0.5	C241V122+2S****
0.0082	7.2	6.5	2.5	5.0	0.5	C242G822+2S****	0.0027	7.2	6.5	2.5	5.0	0.5	C242J272+2S****	0.0015	7.2	6.5	2.5	5.0	0.5	C241V152+2S****
0.010	7.2	6.5	2.5	5.0	0.5	C242G103+2S****	0.0033	7.2	6.5	2.5	5.0	0.5	C242J332+2S****	0.0018	7.2	6.5	2.5	5.0	0.5	C241V182+2S****
0.012	7.2	6.5	2.5	5.0	0.5	C242G123+2S****	0.0039	7.2	6.5	2.5	5.0	0.5	C242J392+2S****	0.0022	7.2	6.5	2.5	5.0	0.5	C241V222+2S****
0.015	7.2	7.5	3.5	5.0	0.5	C242G153+2S****	0.0047	7.2	6.5	2.5	5.0	0.5	C242J472+2S****	0.0027	7.2	6.5	2.5	5.0	0.5	C241V272+2S****
0.018	7.2	7.5	3.5	5.0	0.5	C242G183+2S****	0.0056	7.2	7.5	3.5	5.0	0.5	C242J562+2S****	0.0033	7.2	7.5	3.5	5.0	0.5	C241V332+2S****
0.022	7.2	7.5	3.5	5.0	0.5	C242G223+2S****	0.0068	7.2	7.5	3.5	5.0	0.5	C242J682+2S****	0.0039	7.2	7.5	3.5	5.0	0.5	C241V392+2S****
0.027	7.2	7.5	3.5	5.0	0.5	C242G273+2S****	0.0082	7.2	7.5	3.5	5.0	0.5	C242J822+2S****	0.0047	7.2	7.5	3.5	5.0	0.5	C241V472+2S****
0.033	7.2	9.5	4.5	5.0	0.6	C242G333+2S****	0.010	7.2	7.5	3.5	5.0	0.5	C242J103+2S****	0.0056	7.2	7.5	3.5	5.0	0.5	C241V562+2S****
0.039	7.2	9.5	4.5	5.0	0.6	C242G393+2S****	0.012	7.2	9.5	4.5	5.0	0.6	C242J123+2S****	0.0068	7.2	7.5	3.5	5.0	0.5	C241V682+2S****
0.047	7.2	9.5	4.5	5.0	0.6	C242G473+2S****	0.015	7.2	9.5	4.5	5.0	0.6	C242J153+2S****	0.0082	7.2	9.5	4.5	5.0	0.6	C241V822+2S****
0.051	7.2	10.0	5.0	5.0	0.6	C242G513+2S****	0.018	7.2	9.5	4.5	5.0	0.6	C242J183+2S****	0.010	7.2	9.5	4.5	5.0	0.6	C241V103+2S****
0.056	7.2	11.0	6.0	5.0	0.6	C242G563+2S****	0.022	7.2	10.0	5.0	5.0	0.6	C242J223+2S****	0.012	7.2	9.5	4.5	5.0	0.6	C241V123+2S****
0.068	7.2	11.0	6.0	5.0	0.6	C242G683+2S****	0.027	7.2	11.0	6.0	5.0	0.6	C242J273+2S****	0.015	7.2	10.0	5.0	5.0	0.6	C241V153+2S****
0.082	7.2	11.0	6.0	5.0	0.6	C242G823+2S****	0.033	7.2	11.0	6.0	5.0	0.6	C242J333+2S****	0.018	7.2	10.0	5.0	5.0	0.6	C241V183+2S****
0.10	7.2	11.0	6.0	5.0	0.6	C242G104+2S****								0.022	7.2	11.0	6.0	5.0	0.6	C241V223+2S****

备注：1.”+”表示容量偏差。 ”+”=capacitance tolerance code, M=±20%,K=±10%,J=±5%

2.”****”表示引线加工和包装代码（见 table 1）。 ”****”=lead form and packing code（refer to table 1）

3.”#”当额定电压为 50VDC,500VDC 时，第 4~5 位是 1H 和 2H。

”#”when the rated voltage is 50VDC,500VDC, the digit 4~5 respectively is 1H,2H.