




**MORSETTIERE PER C.S.
TERMINAL BLOCKS FOR P.C.B.
BARRETTES DE CONNEXION POUR C.I.
ANSCHLUßKLEMMEN FÜR LEITERPLATTE**

TIPO
TYPE
TYPE
TYP




CPP

PASSO
PITCH
PAS
RASTERMAß

3,5 3,81 7 7,62 mm

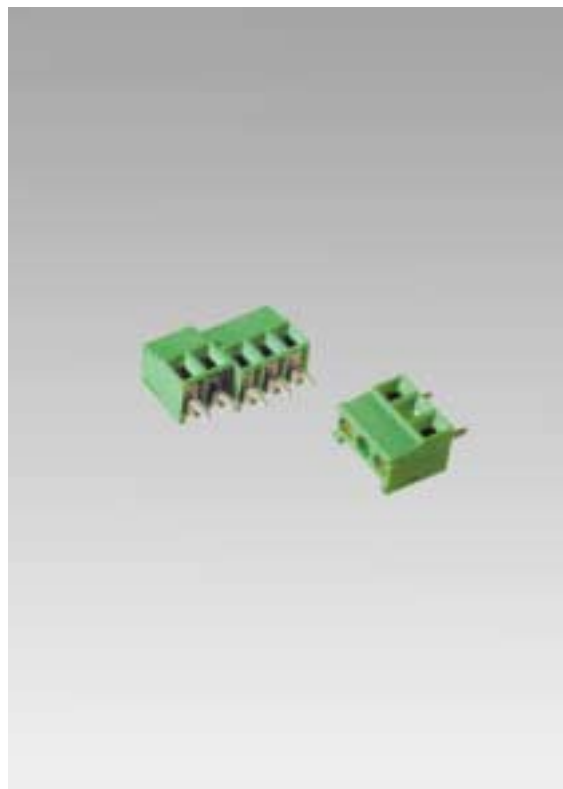


CPP 3,5/...



P	L mm
3,5	3,5 x p
3,81	3,81 x p
7	7 x p-3,5
7,62	7,62 x p-3,81

CPP 3,5/...SQ



MODULI COMPONENTI
A CARRELLO
2/3 POLI

RISING CLAMP
INTERLOCKING MODULES
2/3 POLES

BORNE ETRIEZ MOBILE
ELEMENTS MODULAIRES
2/3 POLES

BEWEGLICHER
KLEMMKÖRPER
2/3 POLIG ANREIHBAR



Corpo isolante Verde	Insulating body Green	Corps isolant Vert	Isolierkörper Grün	PA68 UL94VO
Vite	Screw	Vis	Schraube	M2-CB4FF+Zn
Morsetto	Clamp	Borne	Klemmkörper	CuZn40 Pb2+Ni
Contatto	Pin	Contacte	Kontakt	CuZn37+Ni+Sn
Coppia di torsione	Testing torque	Couple de serrage	Zul. Drehmoment	0,2 Nm
Sezione	Section	Section	Querschnitt	0,75 mm ²
Vite imperdibile	Captive screw	Vis imperdable	Schraube unvelierbar	-
Foro di montaggio	P.C.B. mounting hole	Perçage C. I.	Leiterplattenbohrung	Ø 1,1 mm
Corrente nominale	Nominal current	Courant nominal	Strombelastbarkeit	9 A
Tensione	Voltage	Tension	Betriebsspannung	130/450 V
Temperatura	Temperature	Température	Temperatur	85°C
Grado di protezione	Protection index	Degré de protection	Schutzklasse	IP00
Resistenza di isolamento	Insulation resistance	Résistance d'isolement	Isolationswiderstand	≥ 5 MΩ
Rigidità dielettrica	Dielectric strength	Rigidité diélectrique	Durchschlagsfestigkeit	≥1250 Vac/60"

Ref. EN 60998-1

SCHEMA
PER ORDINAZIONE

ORDER
SCHEME

TABLEAU
DE COMMANDE

BESTELLSCHHEMA

P	p	
Passo	N° di Poli	Numerazione
Pitch	Nr. of Poles	Printing
Pas	Nb. Pôles	Marquage
Rastermaß	Polzahl	Bedruckung
3,5	MIN 2÷MAX ...	
3,81		
7	MIN 1÷MAX ...	
7,62		
CPP	 /	SQ
		NU

