

| Spec No.    | Date      | Page | Ver. |
|-------------|-----------|------|------|
| A-TS-006-00 | 2006/4/21 | 1/13 | B-00 |

# LED SPECIFICATION

**PART NO. : EOS-RGB601A00**

## PART DESCRIPTION:

Full Color Top LED  
(Red,Green,Blue Color)

| EOI      |                    |           | CUSTOMER APPROVED |
|----------|--------------------|-----------|-------------------|
| ACTION   | NAME               | DATE      |                   |
| PREPARED | <i>Peggy Liang</i> | 2006/4/21 |                   |
| CHECKED  | <i>Cathy Huang</i> | 2006/4/21 |                   |
| APPROVED | <i>Ader Wu</i>     | 2006/4/21 |                   |

| Spec No.    | Date      | Page | Ver. |
|-------------|-----------|------|------|
| A-TS-006-00 | 2006/4/21 | 2/12 | B-00 |

## PART NO. : EOS-RGB601A00


### Features

- ◆ Super-luminosity chip LED
- ◆ PLCC-6 SMT Package
- ◆ Built-in Red, Green, and Blue chip
- ◆ Good heat dissipation
- ◆ Pb free & RoHS compliant product
- ◆ Class 1 ESD sensitive


### Applications

- ◆ Flashlight for digital camera of cellular
- ◆ Information boards
- ◆ Amusement equipment
- ◆ Full color application
- ◆ General Use

### Package Dimension

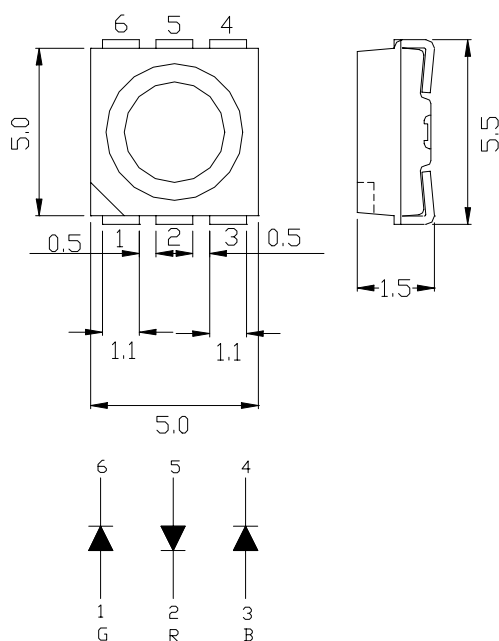


Recommended soldering pad

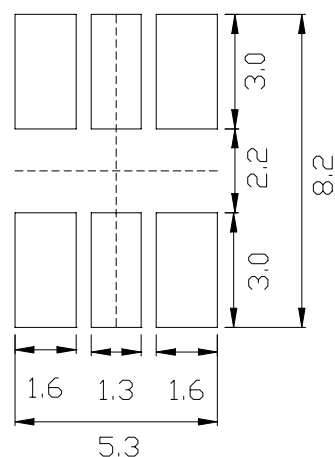

Note:

- All dimensions are in millimeter.
- Tolerance is  $\pm 0.20\text{mm}$  unless otherwise note.
- Specifications are subject to be changed without notice.

### Beam Pattern

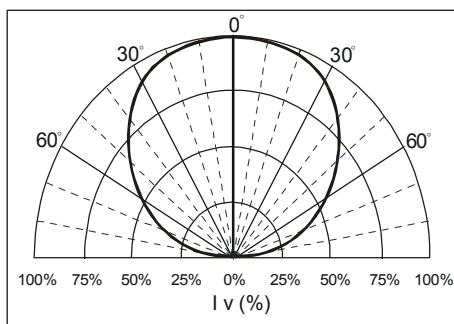

## PART NO. : EOS-RGB601A00

### Absolute Maximum Ratings at $T_A=25^{\circ}\text{C}$

| Parameter                                                | Symbol            | MAX.                                            |       |       | Unit                   |
|----------------------------------------------------------|-------------------|-------------------------------------------------|-------|-------|------------------------|
|                                                          |                   | Red                                             | Green | Blue  |                        |
| Average Forward Current <sup>[a] [c]</sup>               | $I_F$             | 30                                              | 20    | 20    | mA                     |
| Peak Forward Current <sup>[b]</sup>                      | $I_{\text{peak}}$ | 1000                                            | 50    | 50    | mA                     |
| Reverse Voltage                                          | $V_R$             | 5                                               | 5     | 5     | V                      |
| Power Dissipation                                        | $P_D$             | 82.5                                            | 91    | 91    | mW                     |
| Current Linearity vs. Ambient Temperature                | $TC_I$            | -0.33                                           | -0.20 | -0.20 | mA/ $^{\circ}\text{C}$ |
| LED Junction Temperature                                 | $T_J$             | 125                                             | 125   | 125   | $^{\circ}\text{C}$     |
| Operating Temperature Range <sup>[c]</sup>               | $T_{\text{OPR}}$  | $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$  |       |       |                        |
| Storage Temperature Range                                | $T_{\text{STO}}$  | $-40^{\circ}\text{C} \sim +100^{\circ}\text{C}$ |       |       |                        |
| Lead Soldering Condition<br>[4mm(.157") away from epoxy] | $T_{\text{SOL}}$  | $260^{\circ}\text{C} / 5 \text{ seconds}$       |       |       |                        |

**Note:** [a] Design of heat dissipation should be considered.

[b]  $t_p \leq 10 \mu\text{s}$ , Duty Cycle=0.005.

[c] The allowable operating current at different operation temperature, please take reference from Fig. 4 page 4.

### Electrical and Optical Characteristics at $T_A=25^{\circ}\text{C}$

| Parameter           | Symbol          | Color | Min.  | Typ. | Max. | Unit          | Test Condition    |
|---------------------|-----------------|-------|-------|------|------|---------------|-------------------|
| Luminous Intensity  | $I_v$           | Red   | 335   | 460  | 900  | mcd           | $I_F=20\text{mA}$ |
|                     |                 | Green | 285   | 600  | 1800 |               |                   |
|                     |                 | Blue  | 112.5 | 180  | 450  |               |                   |
| Viewing Angle       | $2\theta_{1/2}$ | Red   | ---   | 120  | ---  | deg           | $I_F=20\text{mA}$ |
|                     |                 | Green | ---   | 120  | ---  |               |                   |
|                     |                 | Blue  | ---   | 120  | ---  |               |                   |
| Dominant Wavelength | $\lambda_d$     | Red   | 620   | 623  | 635  | nm            | $I_F=20\text{mA}$ |
|                     |                 | Green | 520   | 525  | 536  |               |                   |
|                     |                 | Blue  | 464   | 470  | 480  |               |                   |
| Spectral Half width | $\Delta\lambda$ | Red   | ---   | 25   | ---  | nm            | $I_F=20\text{mA}$ |
|                     |                 | Green | ---   | 25   | ---  |               |                   |
|                     |                 | Blue  | ---   | 25   | ---  |               |                   |
| Forward Voltage     | $V_F$           | Red   | 1.25  | 2.2  | 2.75 | V             | $I_F=20\text{mA}$ |
|                     |                 | Green | 2.75  | 3.4  | 4.55 |               |                   |
|                     |                 | Blue  | 2.75  | 3.4  | 4.55 |               |                   |
| Reverse Current     | $I_R$           | Red   | ---   | ---  | 10   | $\mu\text{A}$ | $V_R=5\text{V}$   |
|                     |                 | Green | ---   | ---  | 50   |               |                   |
|                     |                 | Blue  | ---   | ---  | 50   |               |                   |

# PART NO. : EOS-RGB601A00

## Rank Combinations

| CODE | Dominant Wavelength    |     | Luminous Intensity |      | Forward Voltage |      |
|------|------------------------|-----|--------------------|------|-----------------|------|
|      | $\lambda D(\text{nm})$ |     | IV(mcd)            |      | Vf (V)          |      |
|      | Min                    | Max | Min                | Max  | Min             | Max  |
| 001  | 520                    | 536 | 450                | 715  | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 112.5              | 180  | 2.75            | 4.55 |
| 002  | 520                    | 536 | 715                | 1125 | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 112.5              | 180  | 2.75            | 4.55 |
| 003  | 520                    | 536 | 1125               | 1800 | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 112.5              | 180  | 2.75            | 4.55 |
| 004  | 520                    | 536 | 450                | 715  | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 112.5              | 180  | 2.75            | 4.55 |
| 005  | 520                    | 536 | 715                | 1125 | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 112.5              | 180  | 2.75            | 4.55 |
| 006  | 520                    | 536 | 1125               | 1800 | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 112.5              | 180  | 2.75            | 4.55 |
| 007  | 520                    | 536 | 450                | 715  | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 180                | 285  | 2.75            | 4.55 |
| 008  | 520                    | 536 | 715                | 1125 | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 180                | 285  | 2.75            | 4.55 |
| 009  | 520                    | 536 | 1125               | 1800 | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 180                | 285  | 2.75            | 4.55 |
| 010  | 520                    | 536 | 450                | 715  | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 180                | 285  | 2.75            | 4.55 |
| 011  | 520                    | 536 | 715                | 1125 | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 180                | 285  | 2.75            | 4.55 |
| 012  | 520                    | 536 | 1125               | 1800 | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 180                | 285  | 2.75            | 4.55 |
| 013  | 520                    | 536 | 450                | 715  | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 285                | 450  | 2.75            | 4.55 |
| 014  | 520                    | 536 | 715                | 1125 | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 285                | 450  | 2.75            | 4.55 |
| 015  | 520                    | 536 | 1125               | 1800 | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 285                | 450  | 2.75            | 4.55 |
| 016  | 520                    | 536 | 450                | 715  | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 285                | 450  | 2.75            | 4.55 |
| 017  | 520                    | 536 | 715                | 1125 | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 285                | 450  | 2.75            | 4.55 |
| 018  | 520                    | 536 | 1125               | 1800 | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 285                | 450  | 2.75            | 4.55 |
| 019  | 520                    | 536 | 285                | 450  | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 112.5              | 180  | 2.75            | 4.55 |
| 020  | 520                    | 536 | 285                | 450  | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 112.5              | 180  | 2.75            | 4.55 |
| 021  | 520                    | 536 | 285                | 450  | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 180                | 285  | 2.75            | 4.55 |
| 022  | 520                    | 536 | 285                | 450  | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 180                | 285  | 2.75            | 4.55 |
| 023  | 520                    | 536 | 285                | 450  | 2.75            | 4.55 |
|      | 620                    | 635 | 335                | 560  | 1.25            | 2.75 |
|      | 464                    | 480 | 285                | 450  | 2.75            | 4.55 |
| 024  | 520                    | 536 | 285                | 450  | 2.75            | 4.55 |
|      | 620                    | 635 | 560                | 900  | 1.25            | 2.75 |
|      | 464                    | 480 | 285                | 450  | 2.75            | 4.55 |


### Note:

- 1.All of rank combinations which include luminous intensity, dominant wavelength, and forward voltage will be included in every shipment.
- 2.Measurement Uncertainty of the Luminous Intensity:  $\pm 15\%$ .
3. Measurement Uncertainty of the Dominant Wavelength:  $\pm 1\text{nm}$ .
4. Measurement Uncertainty of the Voltage:  $\pm 0.05\text{V}$ .

# PART NO. : EOS-RGB601A00

## Sorting Chart for Chromaticity Coordinates

| Bin coordinate<br>Chromaticity<br>bin | P1<br>(x,y) | P2<br>(x,y) | P3<br>(x,y) | P4<br>(x,y) |
|---------------------------------------|-------------|-------------|-------------|-------------|
| A                                     | (0.24,0.28) | (0.23,0.31) | (0.28,0.36) | (0.29,0.33) |
| B                                     | (0.29,0.33) | (0.28,0.36) | (0.33,0.41) | (0.34,0.38) |
| C                                     | (0.24,0.20) | (0.22,0.26) | (0.26,0.30) | (0.28,0.24) |
| D                                     | (0.28,0.24) | (0.26,0.30) | (0.30,0.34) | (0.32,0.28) |
| E                                     | (0.32,0.28) | (0.30,0.34) | (0.34,0.38) | (0.36,0.32) |
| F                                     | (0.36,0.32) | (0.34,0.38) | (0.36,0.40) | (0.38,0.34) |
| G                                     | (0.27,0.19) | (0.26,0.22) | (0.31,0.27) | (0.32,0.24) |
| H                                     | (0.32,0.24) | (0.31,0.27) | (0.36,0.32) | (0.37,0.29) |






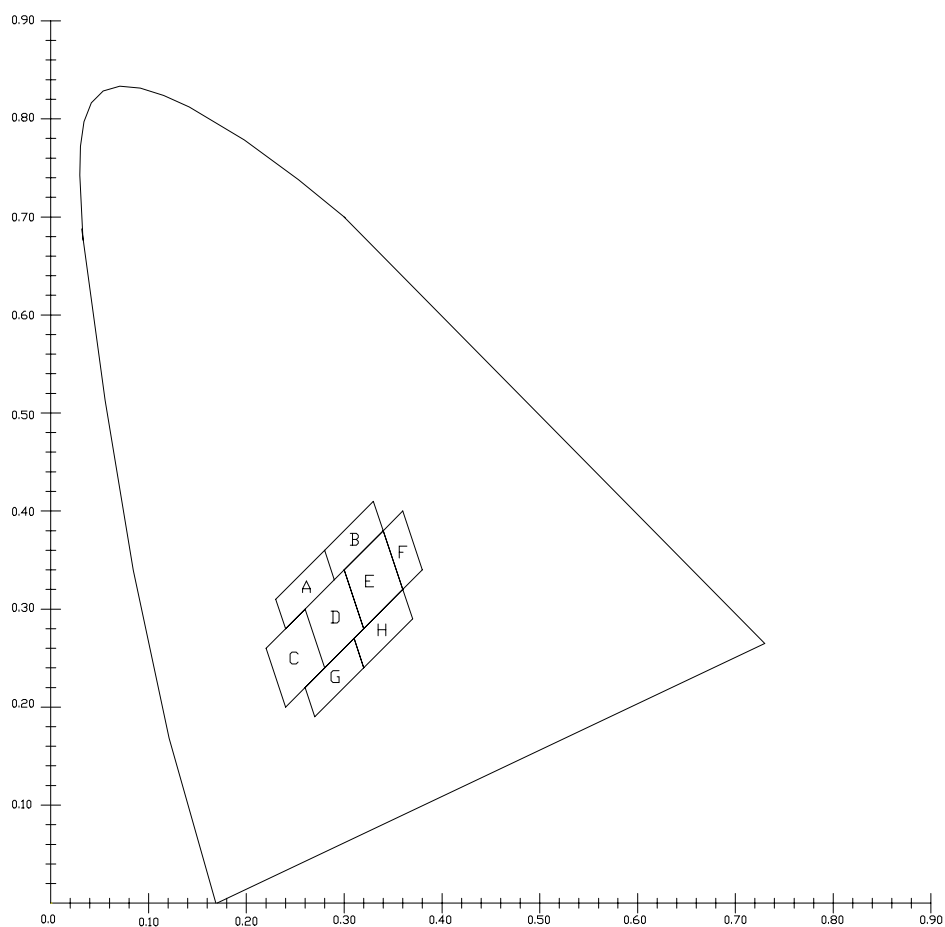


| Spec No.    | Date      | Page | Ver. |
|-------------|-----------|------|------|
| A-TS-006-00 | 2006/4/21 | 6/12 | B-00 |

## PART NO. : EOS-RGB601A00

### Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

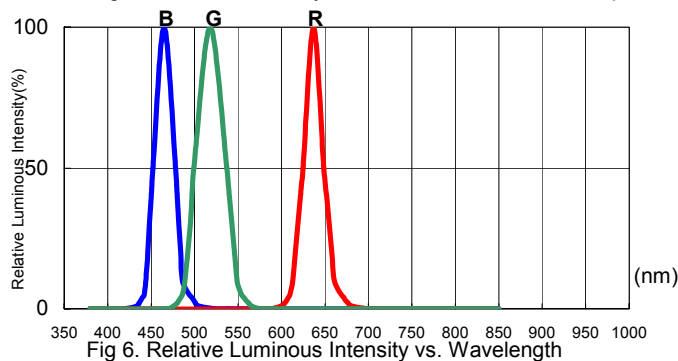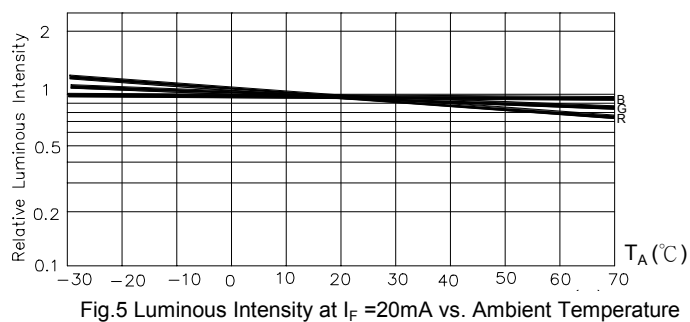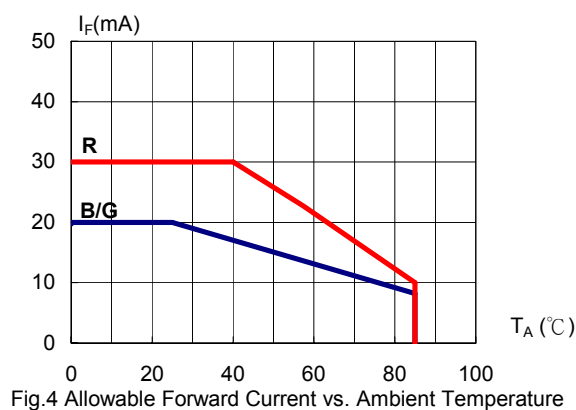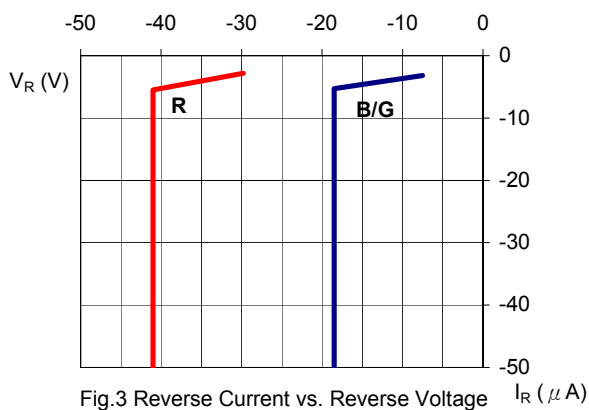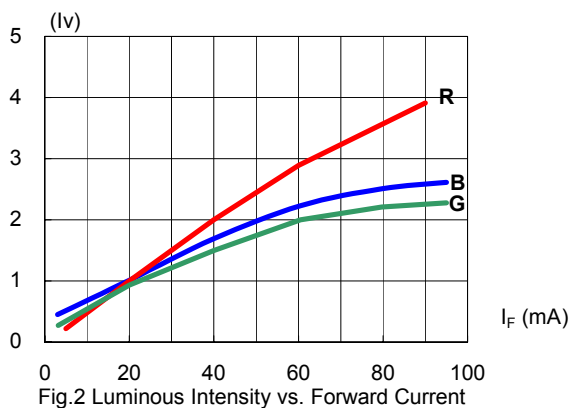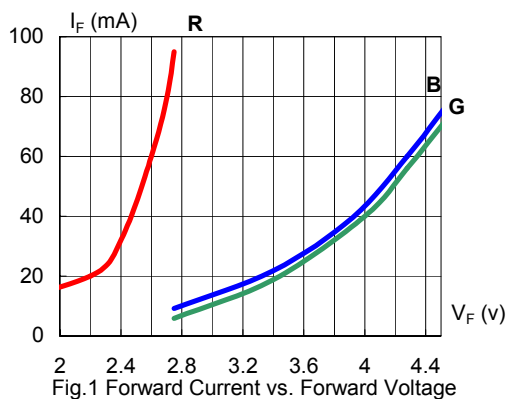

**Note: The data shown above are typical curves. Every LED component may have some variations of characteristics.**

# PART NO. : EOS-RGB601A00

## Reliability Test

EOI'S LED components are checked by reliability test based on MIL standards.

### 1. Test Conditions, Acceptable Criteria & Results:

| Classification   | Test Item                    | Standard Test Method          | Test Conditions                                                                                                                       | Duration  | Unit  | Acc/Rej Criteria | Result |
|------------------|------------------------------|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|------------------|--------|
| Life Test        | Operation Life Test          | MIL-STD-750D<br>Method 1026.3 | $T_A=25^{\circ}\text{C}$ ; $I_F=30\text{mA}^*$                                                                                        | 1000hrs   | 50pcs | 0/1              | pass   |
| Environment Test | High Temperature Storage     | MIL-STD-750D<br>Method 1032.1 | $T_A=100^{\circ}\text{C}$                                                                                                             | 1000hrs   | 50pcs | 0/1              | pass   |
|                  | Low Temperature Storage      | MIL-STD-750D<br>Method 1032.1 | $T_A=-40^{\circ}\text{C}$                                                                                                             | 1000hrs   | 50pcs | 0/1              | pass   |
|                  | Temp&Humidity with Bias      | MIL-STD-750D<br>Method 103B   | $T_A=85^{\circ}\text{C}$ ; Rh=85%<br>$I_F=20\text{mA}$                                                                                | 1000hrs   | 50pcs | 0/1              | pass   |
|                  | Thermal Shock                | MIL-STD-750D<br>Method 1056.1 | $-10^{\circ}\text{C}$ (1min)<br>$\sim 100^{\circ}\text{C}$ (1min)                                                                     | 20cycles  | 50pcs | 0/1              | pass   |
|                  | Temperature Cycling Test     | MIL-STD-750D<br>Method 1051.5 | $-40^{\circ}\text{C}$ (30min) $\sim 25^{\circ}\text{C}$ (5min)<br>$\sim 100^{\circ}\text{C}$ (30min) $\sim 25^{\circ}\text{C}$ (5min) | 100cycles | 50pcs | 0/1              | pass   |
| Mechanical Test  | Solderability                | MIL-STD-750D<br>Method 2026.4 | $235\pm 5^{\circ}\text{C}$ ; 3sec                                                                                                     | 1time     | 50pcs | 0/1              | pass   |
|                  | Resistance to Soldering Heat | MIL-STD-750D<br>Method 2031.1 | $260^{\circ}\text{C}$ ; 5sec                                                                                                          | 1time     | 50pcs | 0/1              | pass   |

Remark : (\*)  $I_F=30\text{mA}$  for AlInGaP chip ;  $I_F=20\text{mA}$  for InGaN chip

### 2. Failure Criteria ( $T_A=25^{\circ}\text{C}$ ):


| Test Item          |       | Test Conditions   | Criteria for Judgment     |                          |
|--------------------|-------|-------------------|---------------------------|--------------------------|
|                    |       |                   | Min.                      | Max.                     |
| Luminous Intensity | $I_V$ | $I_F=20\text{mA}$ | $\text{LSL}\times 0.5$ ** |                          |
| Voltage (Forward)  | $V_F$ | $I_F=20\text{mA}$ |                           | $\text{USL}\times 1.1$ * |

(\*) USL : Upper Standard Level , (\*\*) LSL : Lower Standard Level

| Spec No.    | Date      | Page | Ver. |
|-------------|-----------|------|------|
| A-TS-006-00 | 2006/4/21 | 8/12 | B-00 |


## PART NO. : EOS-RGB601A00

### Taping Dimension

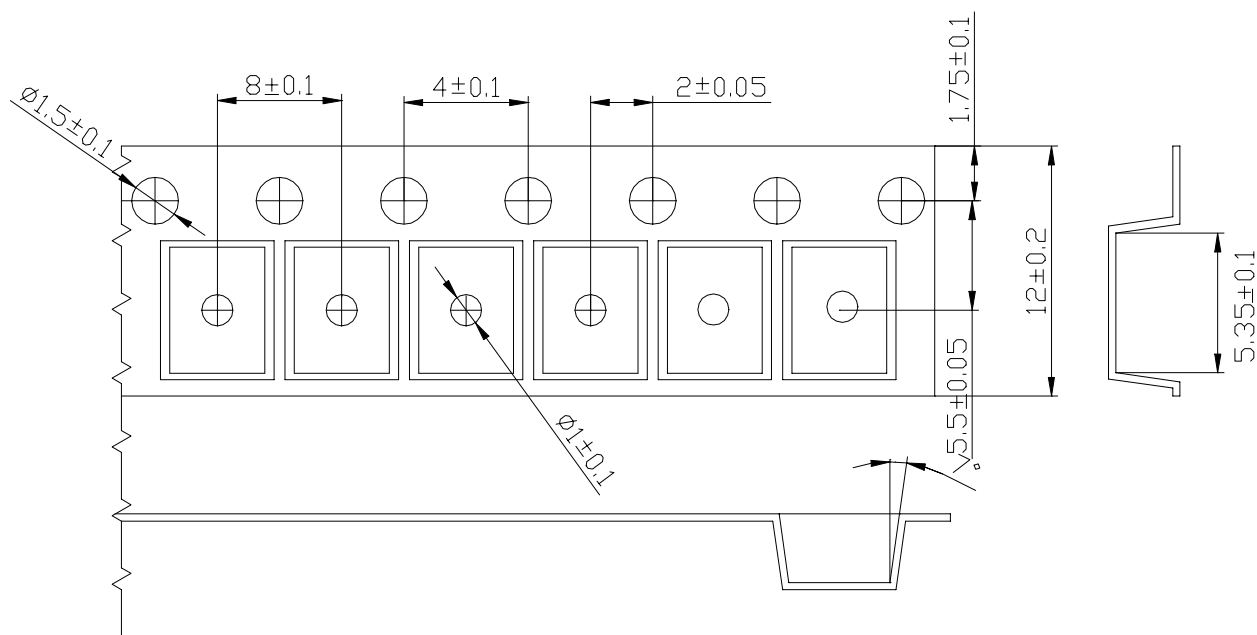

1. Polarity referring onto the cathode mark/line is reversed on the UR/HR(N-side up chips).
2. The carrier tape and components loading specifications meet the EIA 481-1a Standard.
3. 2,500 pieces per reel is standard loading quantity.

### Reel Dimension

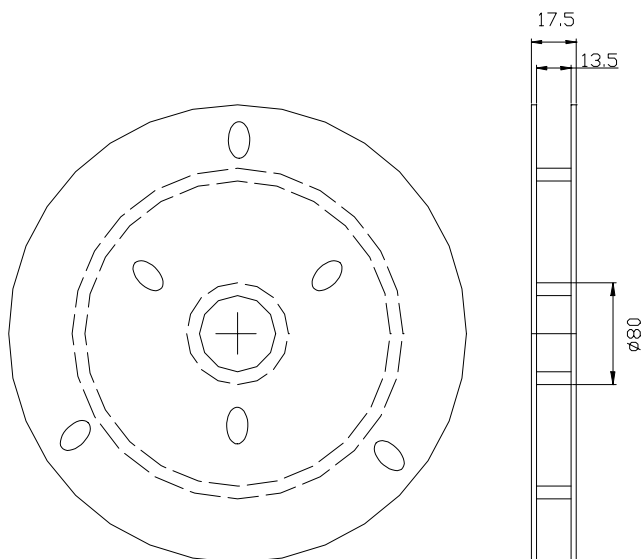

UNIT:MM

## PART NO. : EOS-RGB601A00

### Precaution of Application


#### 1. Circuit layout

Due to the forward voltage of LED will vary with temperature and its driving current, the current-limited protective circuit should be considered in the LED circuit design.

When LEDs are arrayed as parallel circuit, different inherent resistance of LED will cause unbalance current. The unbalanced driving current which exists in every parallel circuit may make LED to be driven at different power. Therefore, the LED driven at higher power may be damaged by over driving current, and the LED driven at lower power may be dimmer than the others.

To solve this situation, a suitable resistor is recommended to put in series with each LED circuit. The resistor will limit and balance the driving current which flow through every parallel circuits.

#### 2. Electric Static Discharge (ESD) Protection




ESD protection for GaP and AlGaAs chips are still necessary even though they are safety in low static-electric discharge. Material in AlInGaP, GaN, or/and InGaN chips are STATIC SENSITIVE device. ESD protection shall be considered and taken in the initial design stage.

If manual work/process is needed, please ensure the device is well protected from ESD within all the process.

#### 3: Dry Pack

This SMD type optical device, is a MOISTURE SENSITIVE device. Please avoid absorbing moisture at any time during transportation or storage. Every reel will be packaged in the moisture barrier anti-static bag to protect LED from the damage caused from moisture and static-electricity. And the bag is well sealed before shipment.

The package is the following:

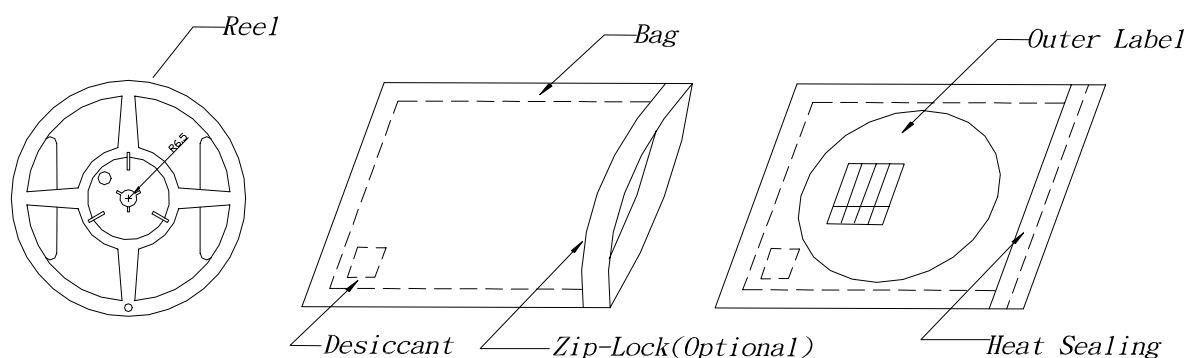

| Spec No.    | Date      | Page  | Ver. |
|-------------|-----------|-------|------|
| A-TS-006-00 | 2006/4/21 | 10/12 | B-00 |

## PART NO. : EOS-RGB601A00

### 4: Cautions of Pick and Place

- (a) It should be avoided to load stress on the resin during high temperature.
- (b) Avoid rubbing or scraping the resin by any object.
- (c) Electric-static may cause damage to the component. Please confirm that the equipment is grounding well.
- (d) Every piece of LED will be sorted and LEDs with the same binning grade will be taped into the same reel or put into the same bag. It is recommended to use the same bin-grade LED to assembly the unit module. This will ensure the LED unit module with good uniformity of brightness, hue, and so on.

### 5: Storage

It's recommended to store the products in the following conditions:

Humidity (Hum.) : 60%RH Max.

Temperature ( $T_A$ ) : 5°C ~ 30°C ( 41°F ~ 86°F )

Shelf life in sealed bag: 12 month at  $T_A < 25^\circ\text{C}$  ~ 30°C and Hum.<30%RH.

After the package is opened, the products should be used within 72 hours.

Or they should be kept at Hum.  $\leq 20\%$  RH in zip-locked sealed bags.

Devices should be subjected to soldering process as soon as possible, after the bag is opened. This will protect LED from the damage of moisture and the corrosion of pads or leads.

Please avoid rapid transitions in ambient temperature, especially in high humidity environment where condensation can occur.

### 6: Baking

It's recommended to bake before soldering . The conditions are suggested as followings:


- (1)  $60 \pm 3^\circ\text{C} \times (6 \sim 12 \text{ hrs})$  and  $< 5\%$  RH, taped reel type
- (2)  $100 \pm 3^\circ\text{C} \times (45 \text{ min} \sim 1 \text{ hrs})$ , bulk type

## PART NO. : EOS-RGB601A00


### 7: Reflow Soldering

To prevent cracking in reflow process, please bake this SMD components before reflow soldering. Never take next process until the component is cooled down to room temperature after reflow. It's banned to load any stress on the resin during soldering. And, the manual soldering process is not recommended for quality consideration.

Recommended SnPb reflow soldering profile:

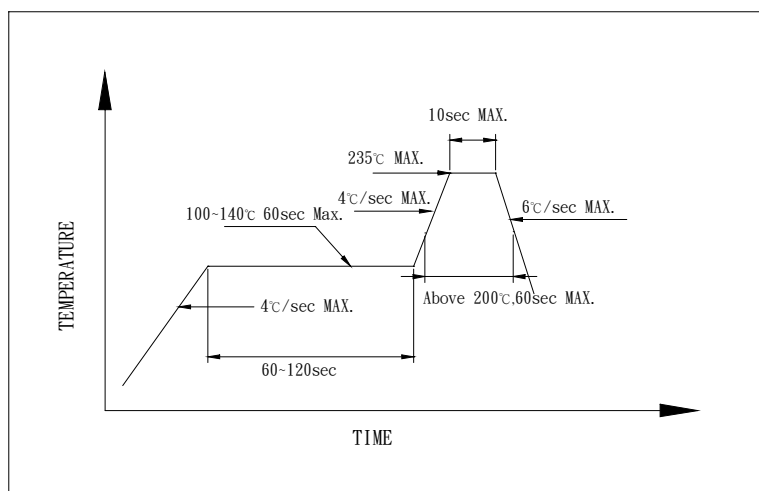

Recommended Pb free reflow soldering profile:

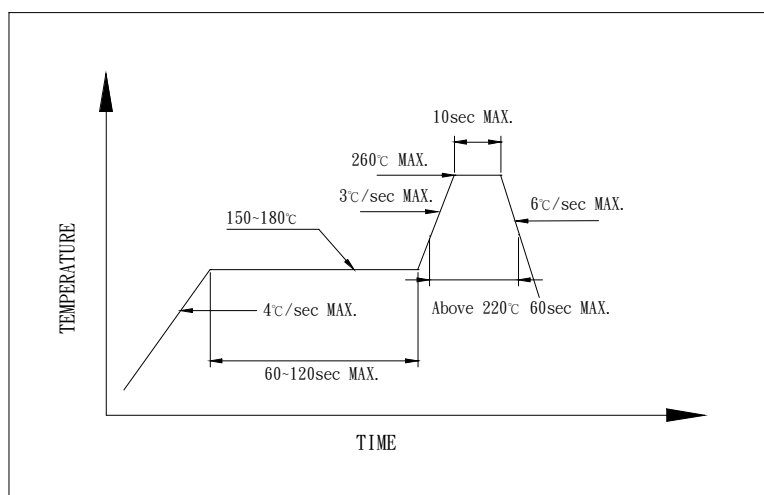

| Spec No.    | Date      | Page  | Ver. |
|-------------|-----------|-------|------|
| A-TS-006-00 | 2006/4/21 | 12/12 | B-00 |

## **PART NO. : EOS-RGB601A00**

### **8: Cleaning**

The conditions of cleaning after soldering:

An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.

Temperatures Time: <50°C×30sec, or <30°C×3min

Ultra sonic cleaning: <15W/bath; Bath volume: 1 liter max.

Baking after cleaning: 100°C max, <3min

### **9: Rework**

- (a) Please finish rework within 5 sec. under 245°C.
- (b) Please avoid overheating of LED component in reworking process. Overheating may damage the LED package.

| Spec No.    | Date      | Page  | Ver. |
|-------------|-----------|-------|------|
| A-TS-006-00 | 2006/4/21 | 13/12 | B-00 |

## PART NO. : EOS-RGB601A00

### Terms and Condition

1. EOI warrants all sold LEDs which conform to the specifications approved by the customers.
2. Any LED supplied by EOI is found not conform to the specifications that both parties agreed upon, customer should claim within 90days of receipt. EOI will repair or replace the LEDs at EOI's option.
3. EOI will not hold any responsibility for the failed LEDs, which are caused by mishandling or misusing the LEDs exceeding the operating conditions that EOI suggested.
4. EOI's LED products are designed and manufactured for general electronic equipment (such as household appliances, communication equipment, office equipment, electronic instrumentation and so on). If customer's application requires exceptional quality or reliability, which might concern human safety, it is recommended to consult with EOI in advance.
5. All the information published is considered to be reliable. However, EOI does not assume any liability arising out of the application or use of any product described herein. EOI's liability for defective LED lamps shall only be limited to replacement, in no event shall EOI be liable for consequential damages or loss.
6. EOI and customer shall both confirm the specifications herein, and all quality related matters will base on the specifications both parties agreed upon.
7. Any modification of the design or manufacturing process taken place, which will affect the characteristics, performance or reliability of LED, customer's approval will be required.
8. This specification approval sheet is an agreement of shipment specification. Please sign it back and keep the copies in two parties. If customers don't sign it back, it is regarded as completely agree with the terms and conditions and also approve of this approval sheet.

### Company Information

#### Headquarters

5F, No. 1, Creation Road II, Hsinchu Science Park,  
HsinChu, Taiwan 300, R.O.C.

TEL: 886-3-5679000

FAX: 886-3-5679999

<http://www.eoi.com.tw>

E-mail: [Service@eoi.com.tw](mailto:Service@eoi.com.tw)



#### U.S. Office

1400 W. Lambert Road, Suite B, Brea CA92821

TEL: 1-562-694-1246, 1-562-694-1427

FAX: 1-562-691-3087

<http://www.eoi-us.com>

E-mail: [Sale@eoius.com](mailto:Sale@eoius.com)