

PRESE E SPINE

IEC connectors | *Fiches et prises*



SPINE DA CIRCUITO STAMPATO

PCB IEC power in lets | *Prises mâles pour circuit imprimé*


Tensione 250 V	Voltage 250 V	Tension 250 V
Corrente 10 A Europa / 15 A USA	Current 10 A Europe / 15 A USA	Courant 10 A Europe / 15 A USA
Contatti Ottone stagnato	Contacts Tinned brass	Contacts Laiton étamé
Corpo Nylon UL94-V0	Body Nylon UL94-V0	Corps Nylon UL94-V0
Norme di riferimento EN60320-1	Standards EN60320-1	Normes EN60320-1
Cod. omologazione Bulgin PX0575/..PC - PX0691/.. PC PX0580/..PC PX0580/..PC/7LC	Approval code Bulgin PX0575/..PC - PX0691/.. PC PX0580/..PC PX0580/..PC/7LC	Code d'homologation Bulgin PX0575/..PC - PX0691/..PC PX0580/..PC PX0580/..PC/7LC




Codice Code Code	Spessore pannello Panel thickness Épaisseur du panneau	Passo Pitch Pas	
Fissaggio Snap-In Snap-In fixing Fixation à enclenchement			
PX5851000	1	-	100
PX5851500	1,5	-	100
PX5852000	2	-	100
PX5853000	3	-	100
Fissaggio a vite orizzontale Horizontal screw fixing Fixation horizontale à vis			
PX5820000	-	7	50
PX5810000	-	9,1	50
Bipolare Double pole Bipolaire			
•PX6921000	1	-	100
•PX6921500	1,5	-	100
•PX6922000	2	-	100
•PX6923000	3	-	100

Dimensioni | Dimensions | Dimensions

PX 585 / PX 692

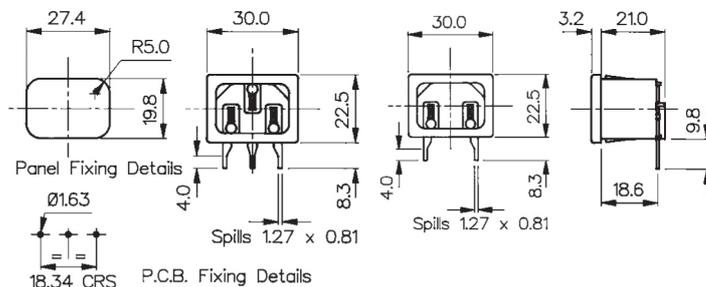

PX 582 / PX 581

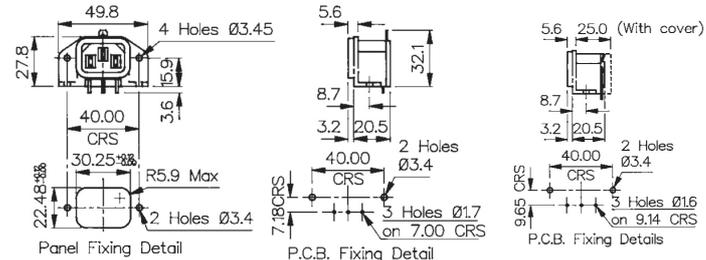

pronta in stock en stock

• non omologato not approved non homologué



PRESE DA CIRCUITO STAMPATO

PCB IEC power out lets | *Prises femelles pour circuit imprimé*


Tensione 250 V	Voltage 250 V	Tension 250 V
Corrente 10 A Europa / 15 A USA	Current 10 A Europe / 15 A USA	Courant 10 A Europe / 15 A USA
Contatti Ottone stagnato passo 7mm	Contacts Tinned brass 7mm centres	Contacts Laiton étamé pas 7 mm
Corpo Nylon UL94-V0	Body Nylon UL94-V0	Corps Nylon UL94-V0
Norme di riferimento EN 60320-2	Standards EN 60320-2	Normes EN 60320-2
Cod. omologazione Bulgin PX0695/..PC - PX0675/PC	Approval code Bulgin PX0695/..PC - PX0675/PC	Code d'homologation Bulgin PX0695/..PC - PX0675/PC




Codice Code Code	Spessore pannello Panel thickness Épaisseur du panneau	
Fissaggio Snap-In Snap-In fixing Fixation à enclenchement		
•PX5891000	1	100
•PX5891500	1,5	100
•PX5892000	2	100
•PX5893000	3	100
Fissaggio a vite orizzontale Horizontal screw fixing Fixation horizontale à vis		
PX5830000	-	50

Dimensioni | Dimensions | Dimensions

PX 589

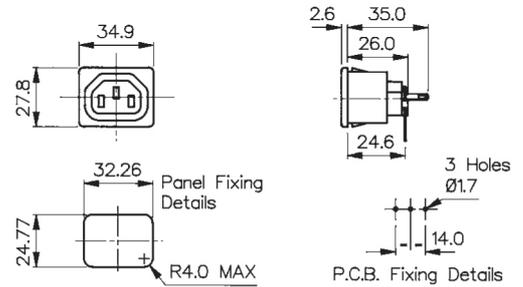

PX 583

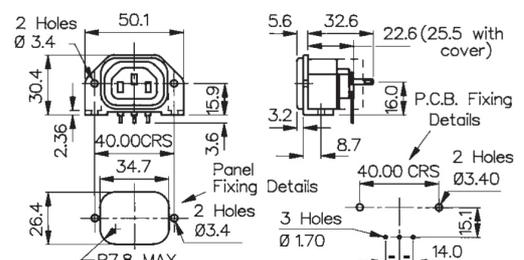

pronta in stock en stock

• non omologato not approved non homologué