








C3510

Vidlice krytá dvouřadá do PS 2.54mm

C	3510	—	10	S	P	G	B	0	0
1	2		3	4	5	6	7	8	9

- | | | | |
|---|---|--|---|
| <p>1. PRODUCTS:
C: Connector</p> <p>2. SERIES NO.:
3510</p> <p>3. CONTACT NO.:
10-64</p> <p>4. CONTACT TYPE:
S: Straight
R: Right Angle
D: S.M.T.</p> | <p>5. INSULATOR MATERIAL:
P: PBT
N: Nylon 6T(S.M.T.)</p> <p>6. CONTACT PLATING:
T: Tin
S: Selective Gold
G: Gold Flash
A: Gold 5U"
B: Gold 10U"
C: Gold 15U"
D: Gold 30U"</p> | <p>7. INSULATOR COLOR:
B: Black
W: White
L: Blue
G: Grey
Y: Yellow</p> | <p>8. OTHERS:
O: No Option
T: Tube Packing
R: Reel Packing
P: PAD+Tube Packing
Q: PAD+Reel Packing
E: PAD+Tray Packing</p> <p>9. FILL IT WITH "0"</p> |
|---|---|--|---|

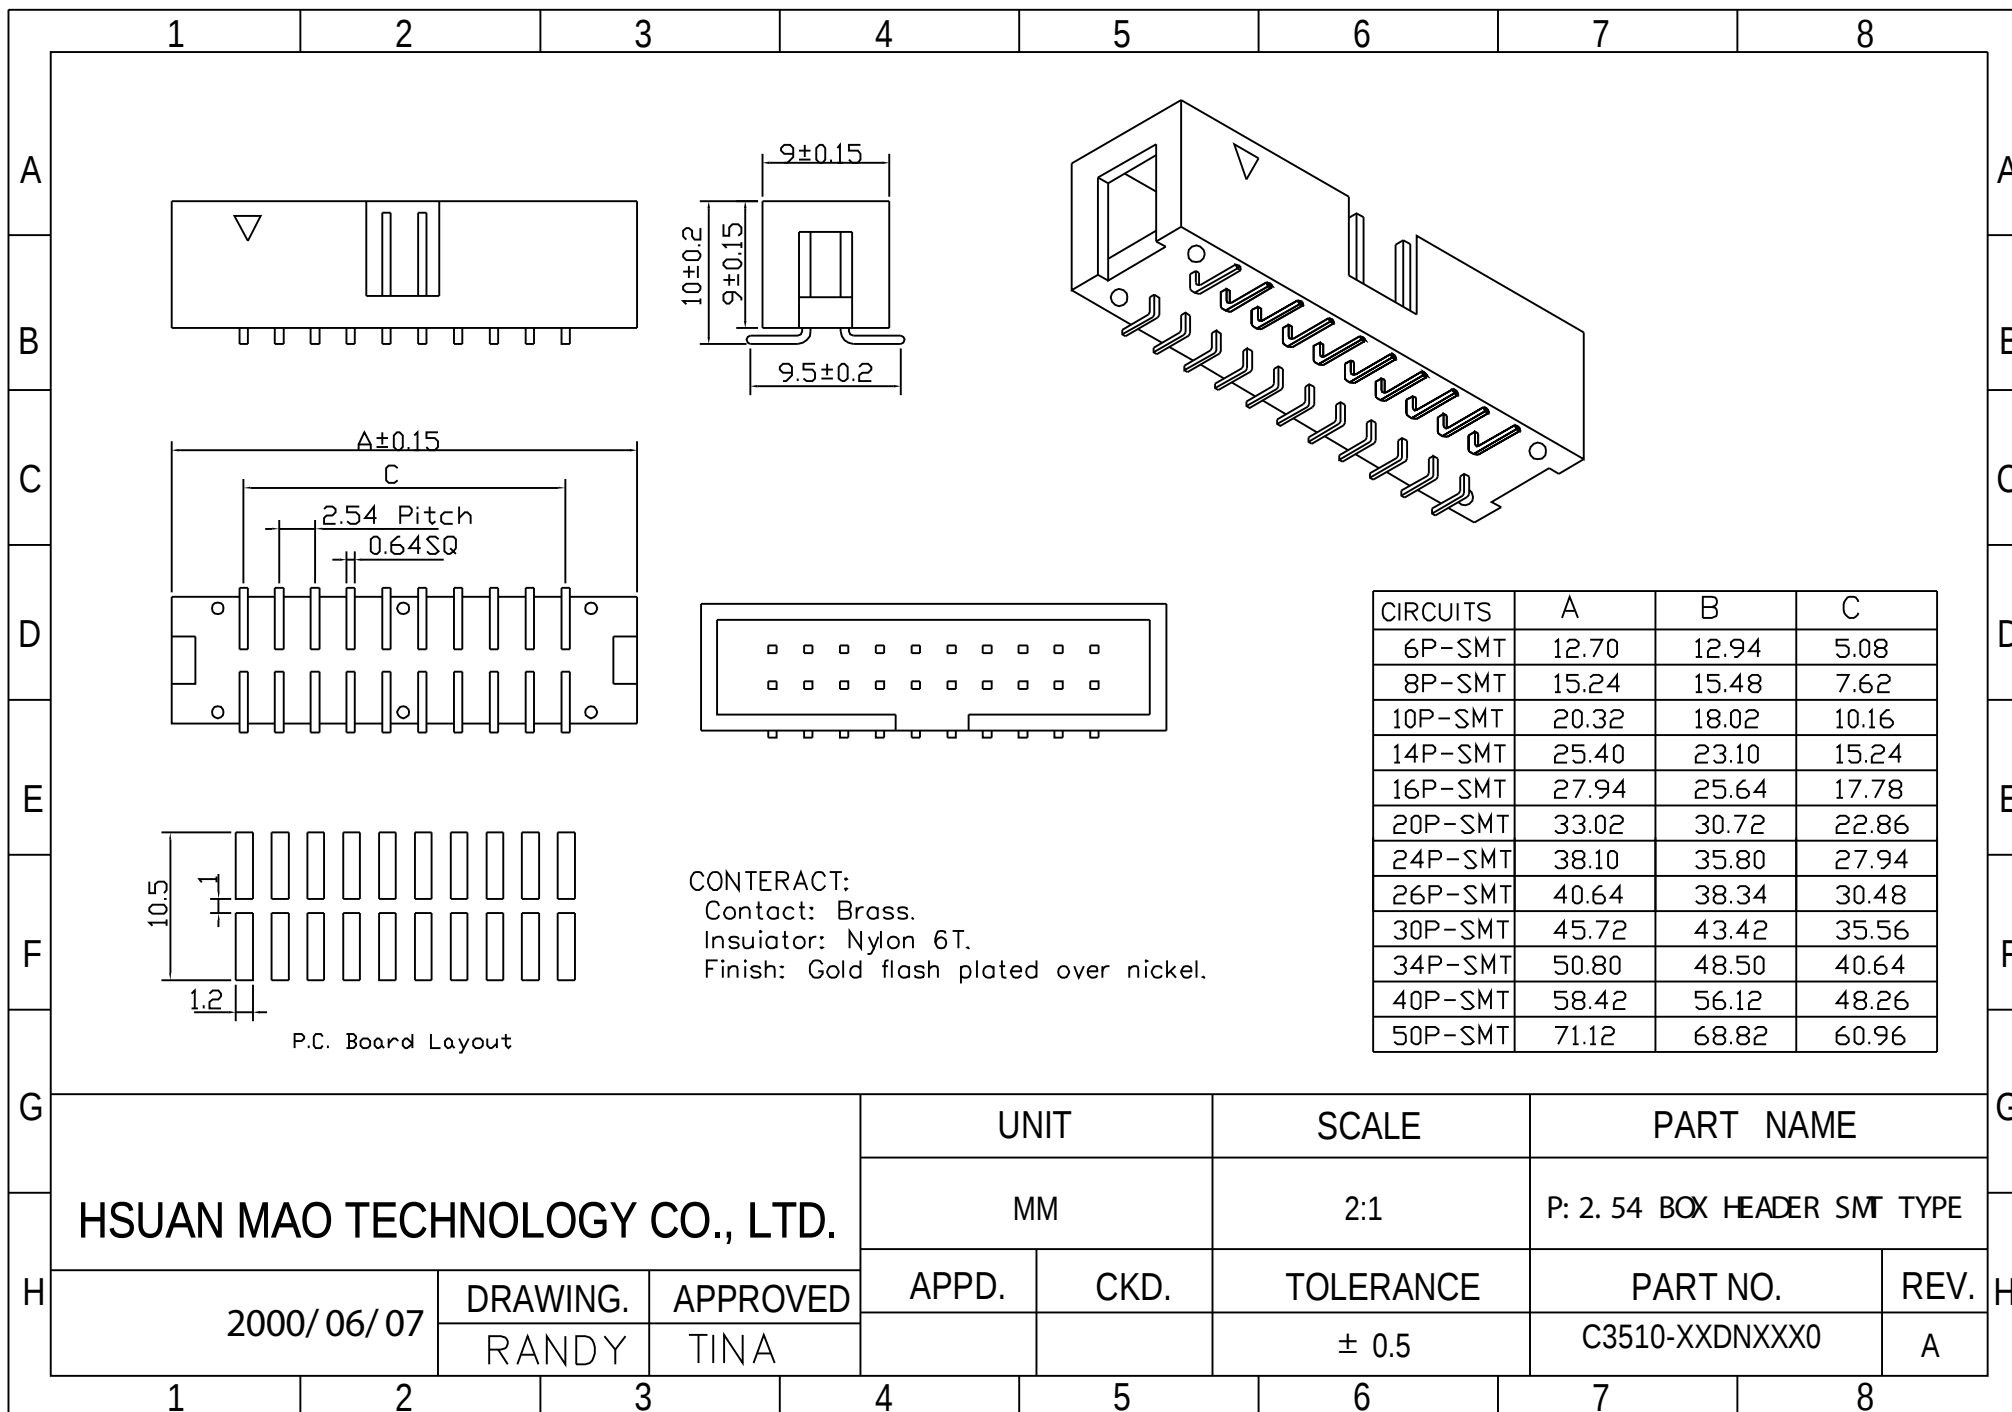

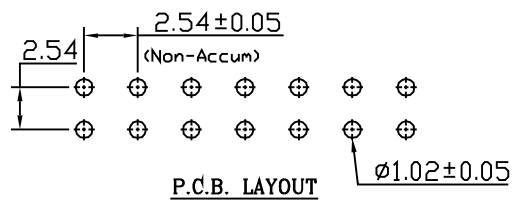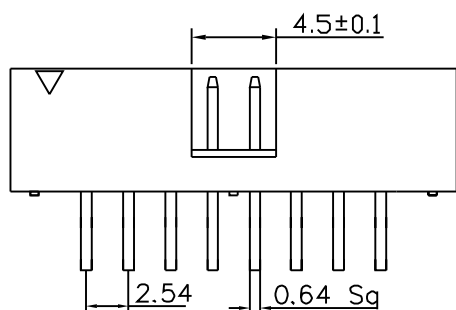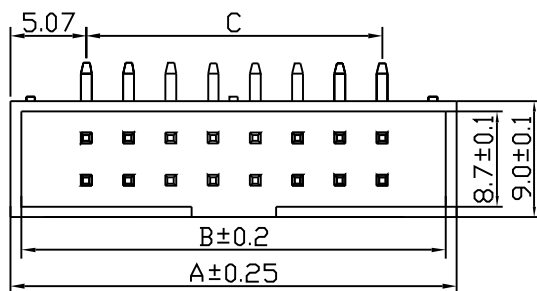

SPECIFICATIONS

Current Rating:	1Amps
Insulator resistance:	1000 Megohms min.
Voltage:	AC 500V For One minute
Operating Temperature:	-55°C~+105°C
Contact Material:	Bronze
Contact Plating:	Gold Flash
Standard:	PBT+30%Glass-Fiber(UL-94-V0)
Contact Resistance:	100mv min. At DC 500V

No of Contacts	Dimensions		
	A	B	C
10pin	20.3	18.1	10.16
14pin	25.38	23.18	15.24
16pin	27.92	25.72	17.78
20pin	33.0	30.8	22.85
26pin	40.62	38.42	30.48
34pin	50.8	48.58	40.64
40pin	58.4	56.2	48.26
50pin	71.1	68.9	60.96

HSUAN MAO TECHNOLOGY CO., LTD.

2002/12/04

DRAWING.

Jane

APPROVED

UNIT

MM

APPD.

CKD.

SCALE

2:1

TOLERANCE

±0.2

PART NAME





2.54 X 2.54mm Box Header
Right Angle /Black Insulator

PART NO.

C3510-XXRPXXX0

REV.

A

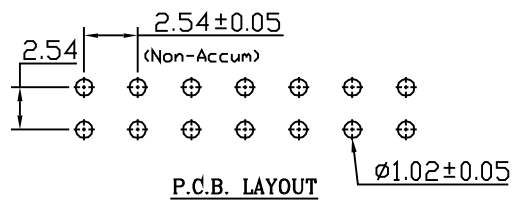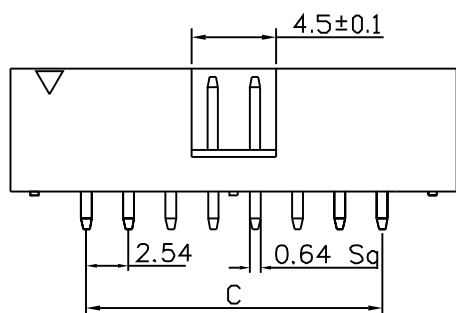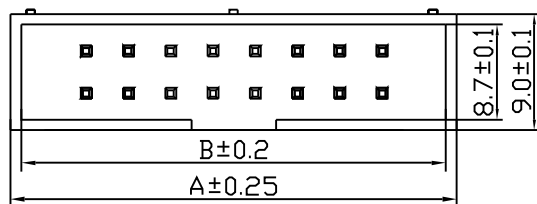

SPECIFICATIONS

Current Rating:	1Amps
Insulator resistance:	1000 Megohms min.
Voltage:	AC 500V For One minute
Operating Temperature:	-55°C~+105°C
Contact Material:	Bronze
Contact Plating:	Gold Flash
Standard:	PBT+30%Glass-Fiber(UL-94-V0)
Contact Resistance:	100mv min. At DC 500V

No of Contacts	Dimensions		
	A	B	C
10pin	20.3	18.1	10.16
14pin	25.38	23.18	15.24
16pin	27.92	25.72	17.78
20pin	33.0	30.8	22.85
26pin	40.62	38.42	30.48
34pin	50.8	48.58	40.64
40pin	58.4	56.2	48.26
50pin	71.1	68.9	60.96

HSUAN MAO TECHNOLOGY CO., LTD.

: 2002/ 12/ 04

DRAWING.

Jane

APPROVED

UNIT

MM

APPD.

CKD.

SCALE

2 : 1

TOLERANCE

±0.2

PART NAME

2.54 X 2.54mm Box Header
Straight /Black Insulator

PART NO.

C3510-XXSPXXX0

REV.

A