



Single Keys

1 - Pole

Types
ST 1034
ST 1034D
ST 1034E

Mechanical Data


Travel:	0.6 ± 0.1 mm
Operating force:	$0.8 \div 2.5$ N
Permissible force at end stop:	50 N (1 min max)
Contact bouncing:	≤ 0.5 ms
Life:	$\geq 1,000,000$ cycles
Weight:	~ 1 g

Electrical Data


Breaking capacity:	20 mA - 30 VDC
Contact resistance:	≤ 25 m Ω
Insulation resistance:	≥ 1 G Ω
Rated temperature range:	-20°C to +70°C

Features:


- Short travel
- Momentary switch with "click-effect"
- Self-cleaning contact
- Suitable for keyboards arrangement.

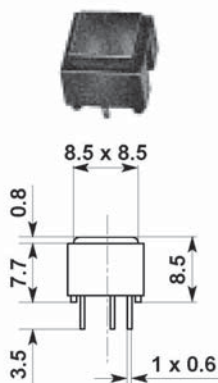





ST 1034
1-pole

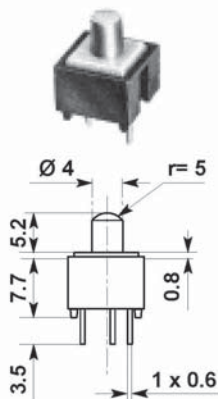

ST 1034D
1-pole

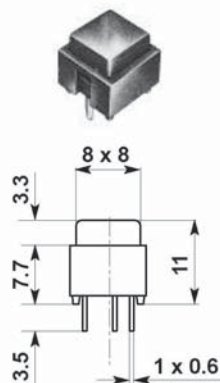

ST 1034E
1-pole



Button colour

Standard: black

Optional: light grey, red, yellow, blue, green

Case colour: black

viewed on
component side

