



LEDTECH ELECTRONICS CORP.

· NANYA ROAD,MUGANG ZHAOQING
· CITY GUANGDONG CHINA.

· TEL:86-758-2875541,2870651,2877464,2876185,2877017

· FAX:86-758-2878014

· *Http://www.ledtech.com.tw*

SPECIFICATION

PART NO. : LT3362-34-D51

10.0MM ROUND BI-COLOR LAMP(3 LEADS)

Approved by	Checked by	Prepared by
<i>Jack</i>	<i>Jang</i>	<i>Bao Min</i>



10.0MM ROUND BI-COLOR LAMP(3 LEADS)

PART NO. : LT3362-34-D51

Page : 1/5


Features

- * High intensity
- * Reliable and rugged
- * Low current requirement
- * IC compatible

Description

The Yellow and Orange lamps are made with GaAsP/GaP Yellow chip, GaAsP/GaP Orange chip and white diffused epoxy resin.

Package Dimensions

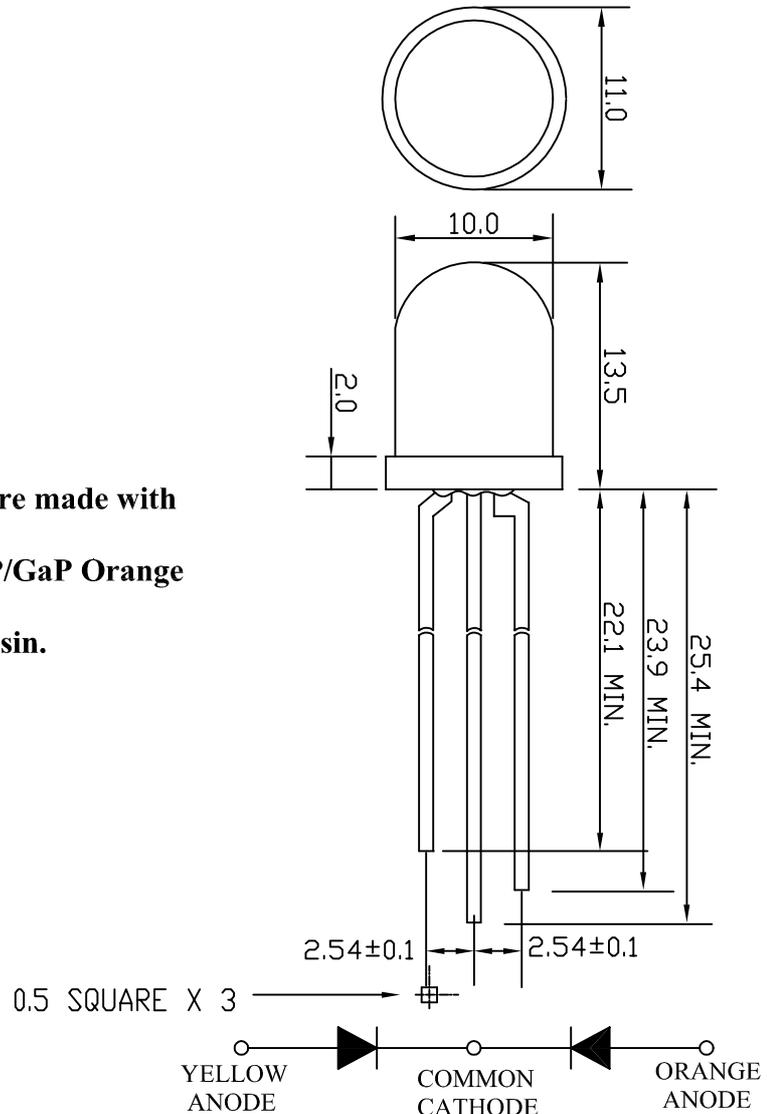

1.All dimensions are in millimeters.

2.Tolerance is ± 0.25 mm unless otherwise noted.

Part No.	Led Chip		Lens Color
	Material	Emitting Color	
LT3362-34-D51	GaAsP/GaP	Yellow	White diffused
	GaAsP/GaP	Orange	



10.0MM ROUND BI-COLOR LAMP(3 LEADS)

PART NO. : LT3362-34-D51

Page : 2/5

Absolute Maximum Ratings at Ta=25°C :

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	72	mW
Reverse Voltage	Vr	5	V
D.C. Forward Current	If	30	mA
Peak Current (1/10 Duty Cycle , 0.1 ms Pulse Width)	If(Peak)	100	mA
Operating Temperature Range	Topr	-25 to +85	°C
Storage Temperature Range	Tstg	-40 to +100	°C
Lead Soldering Temp.(1.6mm from body) for 5 seconds		260	°C

Electrical and Optical Characteristics :

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Intensity	Y	If=20mA	24.0	40.0		mcd
	O		70.0	120.0		
Forward Voltage	Y	If=20mA		2.1	2.6	V
	O			2.1	2.6	
Peak Wavelength	Y	If=20mA		585		nm
	O			635		
Dominant Wavelength	Y	If=20mA		590		nm
	O			626		
Reverse Current	Ir	Vr=5V			100	μ A
Viewing Angle		2θ 1/2		42		deg
Spectrum Line Halfwidth	Y	If=20mA		35		nm
	O			35		




10.0MM ROUND BI-COLOR LAMP(3 LEADS)


PART NO. : LT3362-34-D51

Page : 3/5


Typical Electrical / Optical Characteristics Curves :

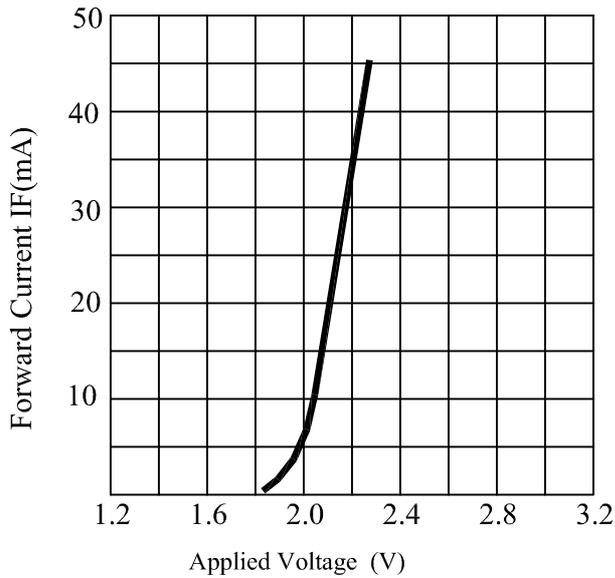


FORWARD CURRENT VS. APPLIED VOLTAGE

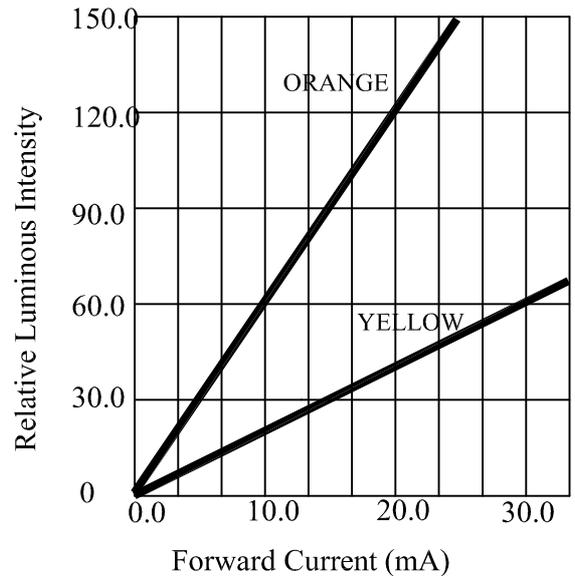

FORWARD CURRENT VS. LUMINOUS INTENSITY

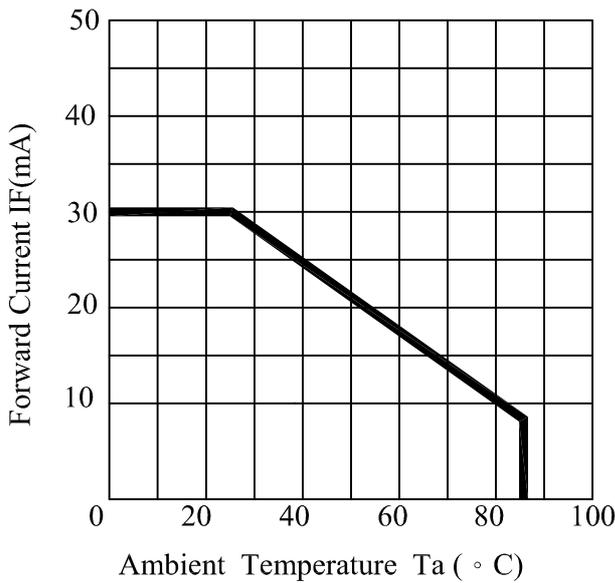

AMBIENT TEMPERATURE VS. FORWARD CURRENT

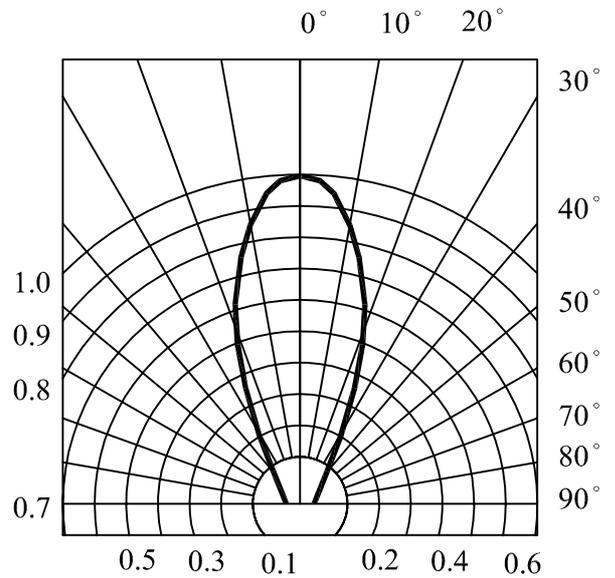

RADIATION DIAGRAM



10.0MM ROUND BI-COLOR LAMP(3 LEADS)

PART NO. : LT3362-34-D51

Page : 4/5

Reliability Test Method :

Test Item	Test Condition	Duration Time
Operation Life	If=20mA / Ta=25°C	168hrs
Storage at High Temperature	Ta=100°C	168hrs
Storage at Low Temperature	Ta=-40°C	168hrs
Storage at High Temperature/High Humidity	Ta=85°C /RH=85%	168hrs
Operating at High Temperature	Ta=85°C / If=20mA	168hrs
Operating at Low Temperature	Ta=25°C / If=20mA	168hrs
Thermal Shock	Ta/T=100°C/30min~ -40°C/30min	10 cycles
Solderability	Tsol=230°C	5 sec

Criteria for Judging The Damage:

Item	Symbol	Test Condition	Criteria for Judgment	
			Min.	Max.
Forward Voltage	Vf	If=20mA	-----	Initial Data x1.1
Reverse Current	Ir	Vr=5V	-----	100 μ A
Luminous Intensity	Iv	If=20mA	Initial Data x0.8	-----



**10.0MM ROUND BI-COLOR LAMP(3 LEADS)
PART NO. : LT3362-34-D51**

ENCASED TYPE


PLASTIC PACKAGE
QUANTITY: 200 PCS

LEDTECH ELECTRONICS CORP.	
PART NO :LTXXXX-XX	
Q'TY	: PCS
LOT NO	:XXXXXXXXXX
DATE	:
BIN CODE:	



INNER BOX
QUANTITY: 20 PACKETS
TOTAL: 4,000 PCS

PART NO.	LXXXXX-XX-XX				
LOT NO.	XXXXXXXXXX				
BIN CODE	Xx X	Xx X	Xx X	Xx X	TOTAL
QUANTITY	PCS	PCS	PCS	PCS	PCS
DATE	XXXX, XX, XX				

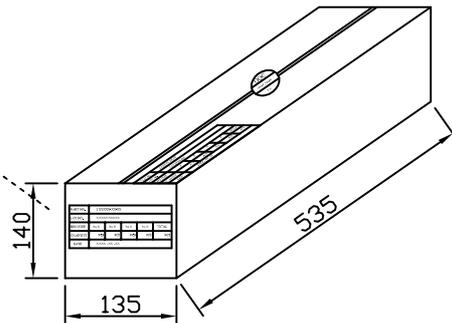

OUTER CARTON
QUANTITY: 4 BOX
TOTAL: 16,000 PCS

C/T NO. 箱 號	XX
PART NO. 料 號	LXXXXX-XX-XX
QUANTITY 數 量	PCS
N.W. 淨 重	KGS
G.W. 毛 重	KGS
REMARK 備 註	

