

Technical Data

Material (block)




- Contact: Brass (Cu Zn)
- (metal housing) Cu/Ni, tin plated
- Terminal screw: Steel galvanized and chromitized
- Surface of solder tail: Tin plated
- Insulator body: Nylon 6.6 (housing) (UL 94 V-0)

Electrical


- Current rating: 15 Amp
- Resistance to tracking: 5M Ohm
- Dielectric Strength: 2500V
- Insulation Withstands Voltage: AC 1500V/Min
- Rated Voltage: 300V

Mechanical

- Operating temperatures: -40°C to +105°C
- Short time peak temperature: +200°C max
- Fixing Hole: 1.3mm

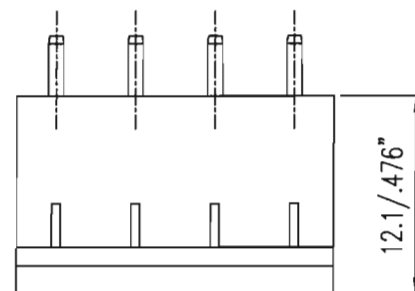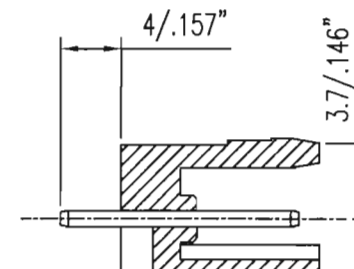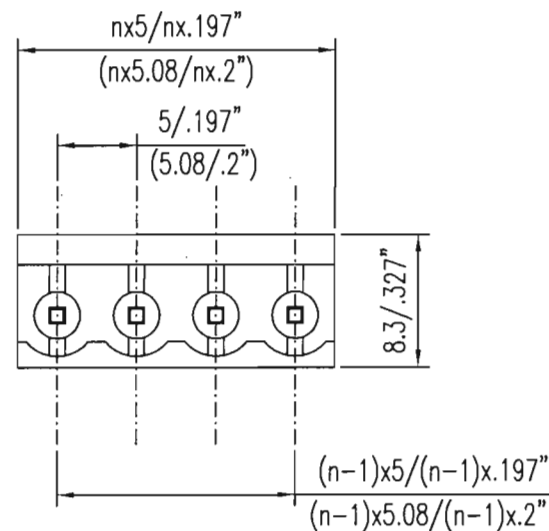

HOW TO ORDER

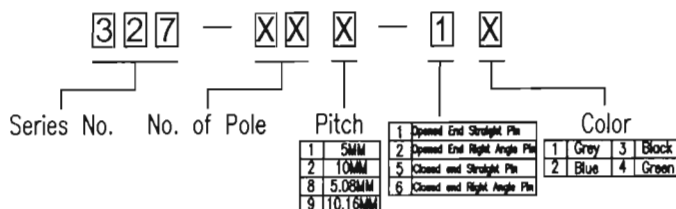

www.karson-tech.com.hk

TITLE:

Type 327 Terminal Block (Opened End Straight Pin)

PART NO.:

327-XXX-1X

DWG NO.: KB1404-3

REVISION: 03

CUSTOMER NO.:

PROJECT NO.:

DATE: 11 JUL 02

TOLERANCE:

UNIT: MM

MATERIAL:

SCALE: NTS

DRAWN BY: KEVIN

SHEET: 1 OF 1

CHECK BY:

APPROVE BY: