


Pin Terminals

(Type TNB)

SPECIFICATION

Non Insulated
Ford Terminals
Electrolytic Copper
Soldered Barrel
Tin Plated




Part No.	L	B	T	E	øD	Wire Size AWG(mm ²)	Current Rating	Qty/Box	Weight/Box
KTL-014-01	13.5	2.8	0.8	4.5	3.4	22~26 (0.25~1.65)	19A	4000	2.2kg
KTL-014-02	19.0	3.0						4000	2.4kg
KTL-014-03	22.5	2.45						4000	2.5kg
KTL-014-04	13.8	2.8	0.8	4.8	4.0	16~14 (1.04~2.63)	27A	4000	2.3kg
KTL-014-05	20.8	2.8						4000	2.7kg
KTL-014-06	22.8	2.45						4000	2.9kg
KTL-014-07	16.8	2.8	0.8	6.8	5.6	12~10 (2.63~6.64)	48A	3000	2.6kg
KTL-014-08	24.8	4.5						3000	2.9kg

Quick Disconnect

(Male)

SPECIFICATION

Brass
Tin Plated
Easy Entry
P.V.C. Insulation

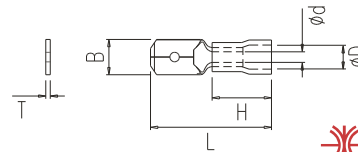


Part No.	L	B	T	H	øD	ød	Wire Size AWG(mm ²)	Current Rating	Insulation Color	Qty/Box	Weight/Box
KTL-015-01	19.2	2.8	0.5	10.0	4.0	1.7	22~16 (0.25~1.65)	10A	Red	4000	1.6kg
KTL-015-02	19.2	2.8	0.8							4000	2.6kg
KTL-015-03	19.2	4.8	0.5							3000	1.2kg
KTL-015-04	19.2	4.8	0.8	10.0	4.3	2.3	16~14 (1.04~2.63)	15A	Blue	3500	2.7kg
KTL-015-05	21.0	6.3	0.8							4000	2.6kg
KTL-015-06	19.2	2.8	0.5							4000	1.7kg
KTL-015-07	19.2	2.8	0.8	10.0	4.3	2.3	16~14 (1.04~2.63)	15A	Blue	3500	2.7kg
KTL-015-08	19.2	4.8	0.5							3000	1.3kg
KTL-015-09	19.2	4.8	0.8							3500	2.9kg
KTL-015-10	21.0	6.3	0.8	13.7	5.4	3.5	12~10 (2.63~6.64)	24A	Yellow	3500	2.5kg
KTL-015-11	22.5	2.8	0.5							3000	1.9kg
KTL-015-12	22.5	2.8	0.8							3000	1.9kg
KTL-015-13	23.0	4.8	0.5	13.7	5.4	3.5	12~10 (2.63~6.64)	24A	Yellow	3000	2.1kg
KTL-015-14	23.0	4.8	0.8							3000	2.1kg
KTL-015-15	24.0	6.3	0.8							2000	2.0kg

Quick Disconnect

(Female)

SPECIFICATION

Brass
Tin Plated
P.V.C. Insulation



T=Mating Tab Thickness



Part No.	L	B	T	H	øD	ød	Wire Size AWG(mm ²)	Current Rating	Insulation Color	Qty/Box	Weight/Box
KTL-016-01	19.0	3.2	0.5	10.0	4.0	1.7	22~16 (0.25~1.65)	10A	Red	4000	1.6kg
KTL-016-02	19.0	3.2	0.8							3000	1.3kg
KTL-016-03	19.0	5.0	0.5							4000	1.2kg
KTL-016-04	19.0	5.0	0.8	10.0	4.3	2.3	16~14 (1.04~2.63)	15A	Blue	3500	1.9kg
KTL-016-05	21.0	6.6	0.8							3000	2.4kg
KTL-016-06	19.0	3.2	0.5							3000	1.4kg
KTL-016-07	19.0	3.2	0.8	10.0	4.3	2.3	16~14 (1.04~2.63)	15A	Blue	3500	1.7kg
KTL-016-08	19.0	5.0	0.5							3000	2.0kg
KTL-016-09	19.0	5.0	0.8							3000	1.9kg
KTL-016-10	21.0	6.6	0.8	13.7	5.4	3.5	12~10 (2.63~6.64)	24A	Yellow	2500	2.2kg
KTL-016-11	22.5	3.0	0.5							2000	1.5kg
KTL-016-12	22.5	3.0	0.8							2000	1.5kg
KTL-016-13	23.0	5.0	0.5	13.7	5.4	3.5	12~10 (2.63~6.64)	24A	Yellow	2000	1.7kg
KTL-016-14	23.0	5.0	0.8							2000	1.7kg
KTL-016-15	25.0	6.6	0.8							1800	2.2kg