

Technical Data

Material (block)




- Contact: Brass (Cu Zn)
(metal housing) Cu/Ni, tin plated
- Terminal screw: Steel galvanized and chromated
- Surface of solder tail: Tin plated
- Insulator body: Nylon 6.6
(housing) (UL 94 V-0)

Electrical

- Current rating: 15 Amp
- Resistance to tracking: 5M Ohm
- Dielectric Strength: 2500V
- Insulation Withstands Voltage: AC 1500V/Min
- Rated Voltage: 300V

Mechanical

- Operating temperatures: -40°C to +105°C
- Short time peak temperature: +200°C max
- Fixing Hole: 1.3mm

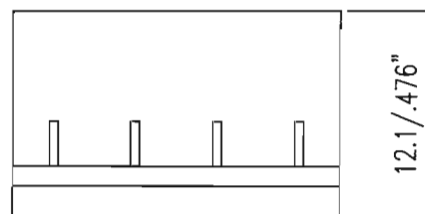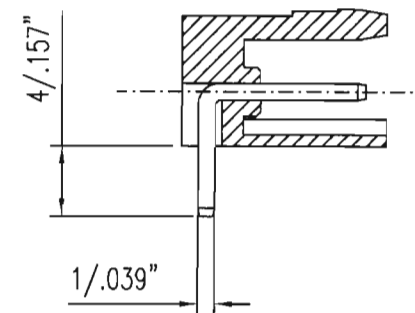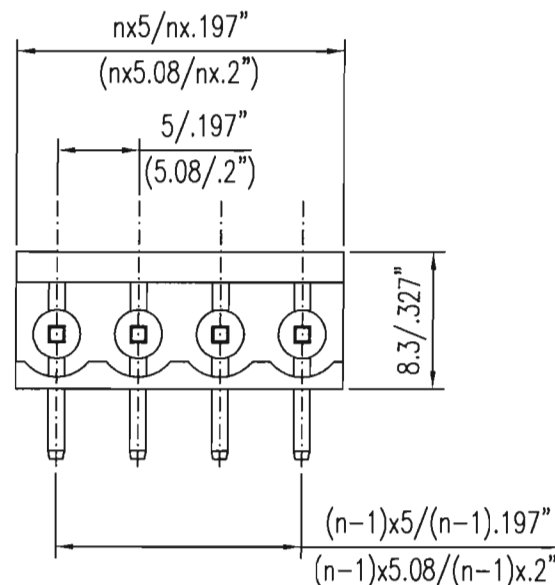

HOW TO ORDER

3	2	7	-	X	X	X	-	2	X
Series No.			No. of Pole			Pitch		Color	
1	5MM		1	Opened End Straight Pin		1	Grey	3	Black
2	10MM		2	Opened End Right Angle Pin		2	Blue	4	Green
8	5.08MM		5	Closed end Straight Pin					
9	10.16MM		6	Closed end Right Angle Pin					



www.karson-tech.com.hk

TITLE: Type 327 Terminal (Opened End Right Angle)

PART NO.:

327-XXX-2X

DWG NO.:

KB1403-3

CUSTOMER NO.:

PROJECT NO. 7000632

DATE:

21 AUG 02

UNIT:

MM

SCALE:

NTS

SHEET:

1 OF 1

DRAWN BY: KEVIN

CHECK BY:

APPROVE BY: