

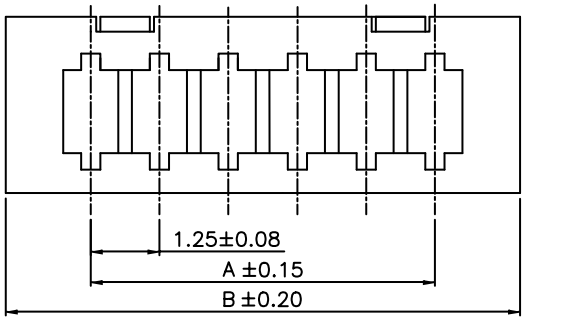


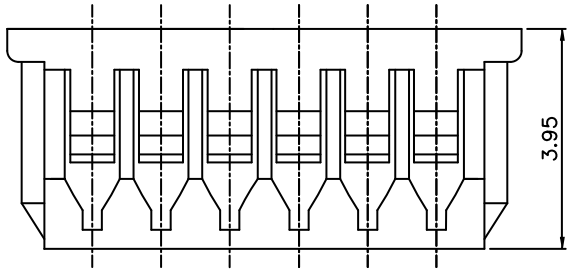



TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: NYLON 66
FLAMABILITY RATING: UL94-V0
COLOR: WHITE
PITCH: 1.25MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 UP TO 85°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
INSULATOR RESISTANCE: >100 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 250V AC/MN

STANDARD
CERTIFIED: E323964 / MODEL NUMBER 653-1133

PACKAGING
BAG

DIMENSION
A = 1.25 x (NB. PIN - 1)
B = 1.25 x (NB. PIN + 1) + 0.5

RoHS Compliant

REV	DATE	FILE	BY
G	17-NOV-09	STANDARD	JP
F	28-OCT-09	INSULATOR R.	JP
E	13-AUG-09	NEW DRAW	JP
D	25-APR-07	UPDATE DRAW	EC
C	01-FEB-07	DRAW	EC
B	31-MAR-04	LEAD FREE	JP
A	17-OCT-01	PDF	JP

PROJECTION:

APPROVAL: RJ

GENERAL TOLERANCE
.X = +/- 0.2
.XX = +/- 0.15

UNIT: MM
SCALE:
SHEET: 1/1
DRAW: PEARL

WÜRTH ELEKTRONIK

DESCRIPTION: 1.25MM FEMALE TERMINAL HOUSING

WERI PART NO: 653 0xx 113 322

SIZE
A4