



LEDTECH ELECTRONICS CORP.

NANYA ROAD,MUGANG ZHAOQING
CITY GUANGDONG CHINA.

TEL:86-758-2875541,2870651,2877464,2876185,2877017

FAX:86-758-2878014

Http://www.ledtech.com.tw

SPECIFICATION

PART NO. : LT0301-22-LC

3.0MM ROUND BI-POLAR LAMP(2 LEADS)

Approved by

Checked by

Prepared by

San

Jang

Bao Min



3.0MM ROUND BI-POLAR LAMP(2 LEADS)


PART NO. : LT0301-22-LC

Page : 1/5

Features

- * High intensity
- * Reliable and rugged
- * Low current requirement
- * IC compatible

Package Dimensions

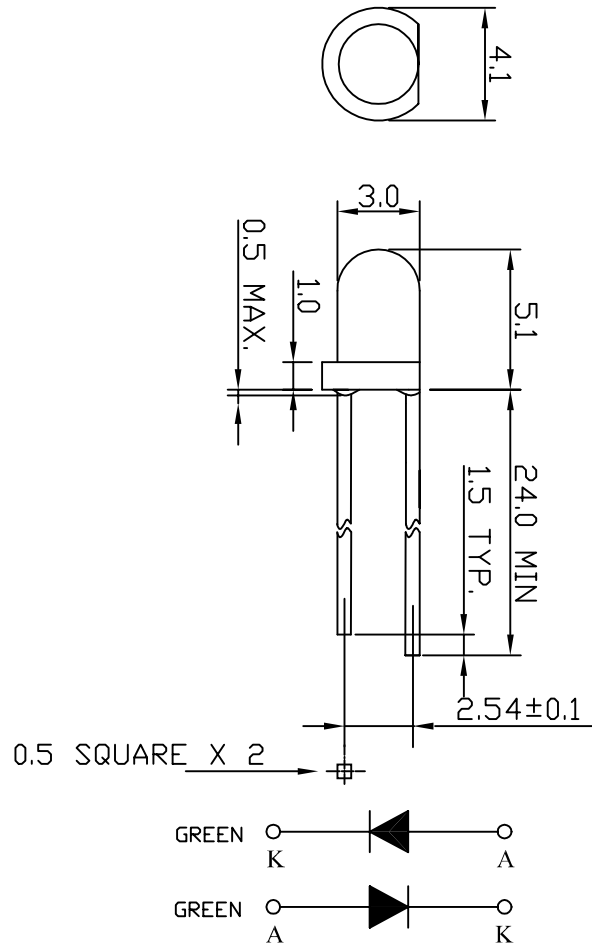

Description

The Green and Green lamps are made with GaP/GaP Green chips and green diffused epoxy resin.

Notes:

- 1.All dimensions are in millimeters.
- 2.Tolerance is ± 0.25 mm unless otherwise noted.

Part No.	Led Chip		Lens Color
	Material	Emitting Color	
LT0301-22-LC	GaP/GaP	Green	Green diffused
	GaP/GaP	Green	



3.0MM ROUND BI-POLAR LAMP(2 LEADS)

PART NO. : LT0301-22-LC

Page : 2/5

Absolute Maximum Ratings at Ta=25°C :

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	72	mW
Reverse Voltage	Vr	5	V
D.C. Forward Current	If	30	mA
Peak Current (1/10 Duty Cycle , 0.1 ms Pulse Width)	If(Peak)	100	mA
Operating Temperature Range	Topr	-25 to +85	°C
Storage Temperature Range	Tstg	-40 to +100	°C
Lead Soldering Temp.(1.6mm from body) for 5 seconds		260	°C

Electrical and Optical Characteristics :

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Intensity	G	Iv	If=2mA	0.7	1.2		mcd
	G			0.7	1.2		
Forward Voltage	G	Vf	If=2mA		1.8	2.2	V
	G				1.8	2.2	
Peak Wavelength	G	λP	If=2mA		567		nm
	G				567		
Dominant Wavelength	G	λD	If=2mA		572		nm
	G				572		
Reverse Current		Ir	Vr=5V			100	μA
Viewing Angle		$2\theta 1/2$	If=2mA		118		deg
Spectrum Line Halfwidth	G	$\Delta \lambda$	If=2mA		30		nm
	G				30		




3.0MM ROUND BI-POLAR LAMP(2 LEADS)


PART NO. : LT0301-22-LC

Page : 3/5


Typical Electrical / Optical Characteristics Curves :

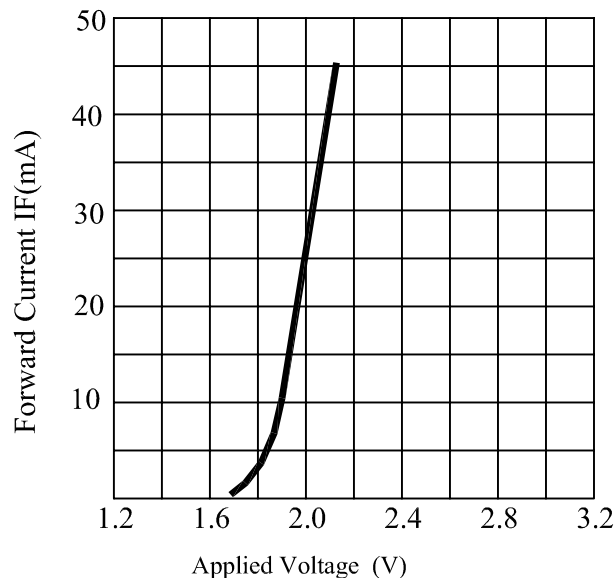


FORWARD CURRENT VS. APPLIED VOLTAGE

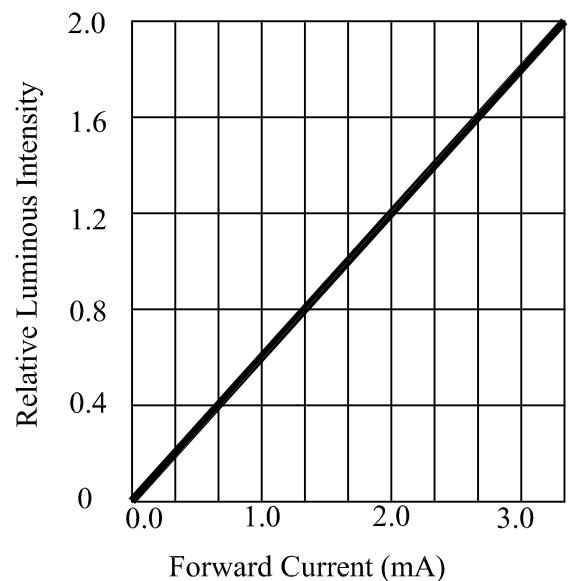

FORWARD CURRENT VS. LUMINOUS INTENSITY

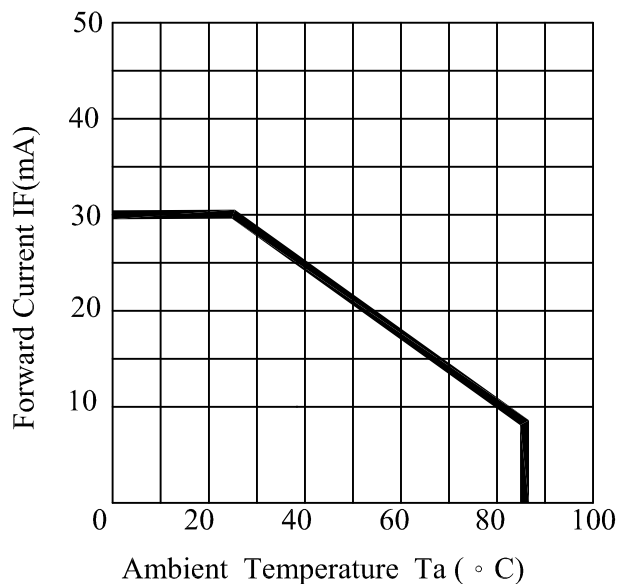

AMBIENT TEMPERATURE VS. FORWARD CURRENT

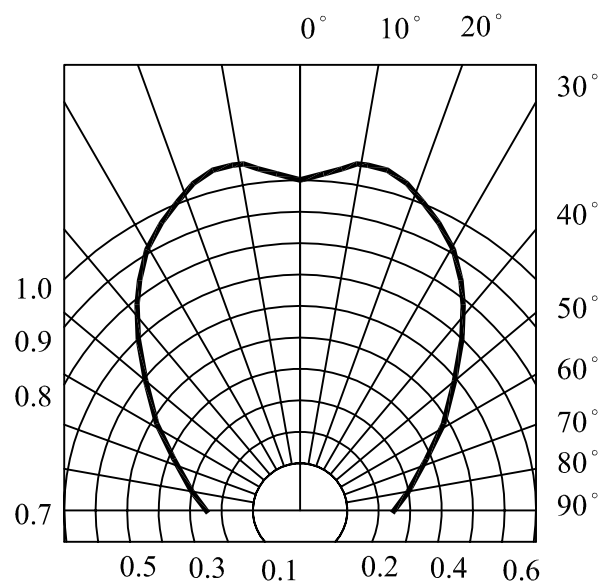

RADIATION DIAGRAM



3.0MM ROUND BI-POLAR LAMP(2 LEADS)

PART NO. : LT0301-22-LC

Page : 4/5

Reliability Test Method :

Test Item	Test Condition	Duration Time
Operation Life	If=2mA / Ta=25°C	168hrs
Storage at High Temperature	Ta=100°C	168hrs
Storage at Low Temperature	Ta=-40°C	168hrs
Storage at High Temperature/High Humidity	Ta=85°C /RH=85%	168hrs
Operating at High Temperature	Ta=85°C / If=2mA	168hrs
Operating at Low Temperature	Ta=25°C / If=2mA	168hrs
Thermal Shock	Ta/T=100°C/30min~ -40°C/30min	10 cycles
Solderability	Tsol=230°C	5 sec

Criteria for Judging The Damage:

Item	Symbol	Test Condition	Criteria for Judgment	
			Min.	Max.
Forward Voltage	Vf	If=2mA	-----	Initial Data x1.1
Reverse Current	Ir	Vr=5V	-----	100 μ A
Luminous Intensity	Iv	If=2mA	Initial Data x0.8	-----



3.0MM ROUND BI-POLAR LAMP(2 LEADS)


PART NO. : LT0301-22-LC

Page : 5/5

ENCASED TYPE


PLASTIC PACKAGE
QUANTITY: 1000 PCS

LEDTECH ELECTRONICS CORP.
PART NO :LTXXXX-XX
Q'TY : PCS
LOT NO :XXXXXXXXXX
DATE :
BIN CODE:



INNER BOX
QUANTITY: 20 PACKETS
TOTAL: 20,000 PCS

PART NO.	LXXXX-XX-XX				
LOT NO.	XXXXXXXXXX				
BIN CODE	Xx X	Xx X	Xx X	Xx X	TOTAL
QUANTITY	PCS	PCS	PCS	PCS	PCS
DATE	XXXX , XX , XX				

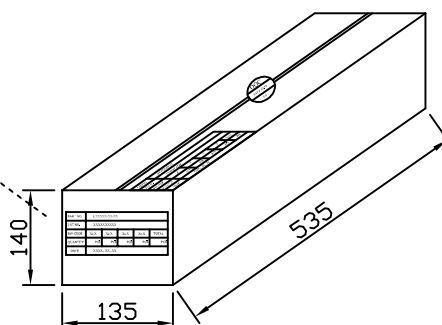

OUTER CARTON
QUANTITY: 4 BOX
TOTAL: 80,000 PCS

C/T NO. 箱 號	XX
PART NO. 料 號	LXXXX-XX-XX
QUANTITY 數 量	PCS
N.W. 淨 重	KGS
G.W. 毛 重	KGS
REMARK 備 註	

