






SERIES 391

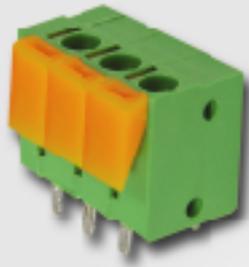

391-031-14

Terminal Blocks For PC-Boards Screwless, Push Button Type

Top Wire Inlet
Spacing 5mm or 10mm
Height Over PC-Board 14mm

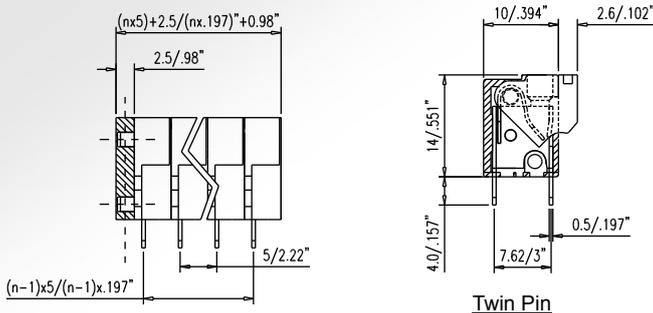

** To avoid accumulated tolerance-variations of Terminal-Blocks to PC-Board spacing, limit the number of contacts to not more than 24 contacts per row.



391-031-14

Technical Data

Material

- Terminal Body: Tin plated brass (Cu Zn)
- Contact Spring: Stainless strip steel
- Surface of solder tail: Tin plated
- Insulator body: Poly Butylene Terephthlene, PBT (30% Glass filled) (UL 94 V-0)

Electrical

- Current rating: 10 Amp
- Resistance to tracking: 5M Ω
- Dielectric strength: 2500V
- Insulation withstands voltage: AC 1500V/Min
- Rated voltage: 250V
- AWG: 22 - 14
- Stripping length: 8.5mm

Mechanical

- Operating temperature: -30°C to + 120°C
- Short time peak temperature: +200°C max

HOW TO ORDER :

