

Technical Data

Material

Insulator : PBT +30% Glass Fiber,
(UL94V-0)

Contact : Brass

Contact Plate : Gold over Nickel or Tin

Specification

Current Rate : 1A

Operation Temperature : -55 °C to +105 °C

Contact Resistance : 10m Ω Max. at DC 1A

Insulation Resistance : 1000m Ω Min. at DC 500V


Dielectric Strength : AC 500V Per minute

Features

Box header body helps maximum
packaging density.




Available with wrap post tail header.

Available in straight or right angle pins.



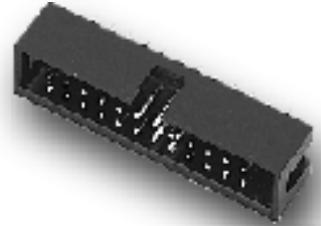


730-242-21

730-242-11



Straight




Right Angle

No. of Pin	Dimension		
	A	B	C
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.85
24	38.08	35.88	27.94
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.80	48.58	40.64
40	58.40	56.20	48.26
44	63.48	67.28	53.34
50	71.10	68.90	60.96
56	78.72	76.52	68.58
60	83.80	81.60	73.65
64	88.88	86.68	78.74

Unit = mm

HOW TO ORDER

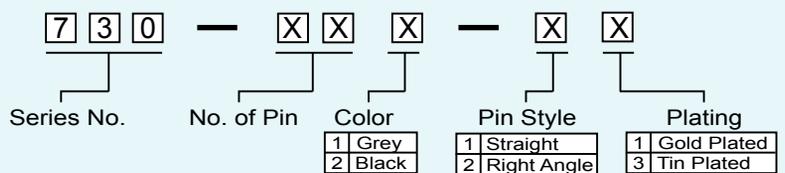

All specification change without prior notice