



1 2 3 4 5 6 7 8



A

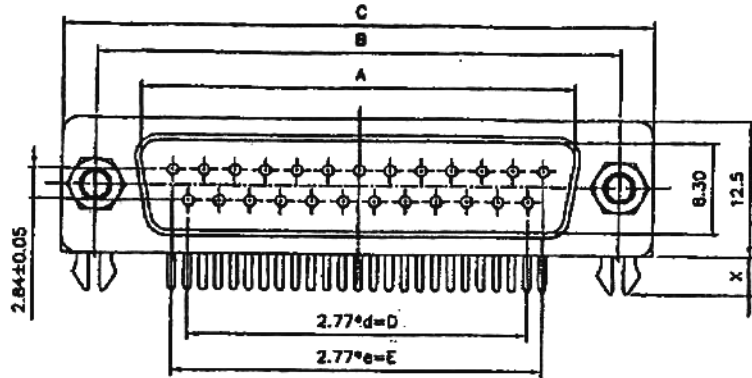


B

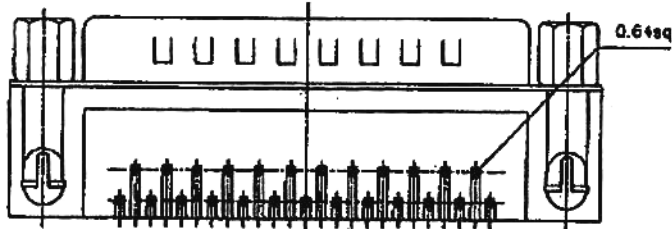

D

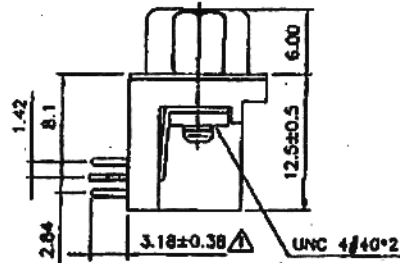

E

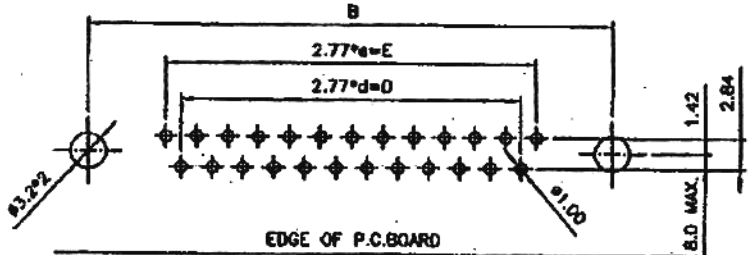

F

RECOMMENDED P.C.B LAYOUT (TOP VIEW)
TOLERANCES: ±0.10mm

SPECIFICATION

MATERIAL
 Insulator: PBT, rated UL94V-0 (standard)
 NYLON-6T, rated UL94V-0 (choose)
 Contacts: Brass (standard); Phosphor Bronze (choose)
 Shell: Steel
 Rivet, Boardlock: Copper alloy
CONTACT PLATING
 Underplate: 50. Nickel
 Contact area: 1.4~30. Selective Gold
 Solder tail area: 100. Tin/Lead
ELECTRICAL
 Operation voltage: 250 VAC max.
 Current rating: 3 Amps max.
 Contact resistance: 15 mohms max.
 Insulation resistance: 3000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +105°C

POSITION	A	B	C	d	D	e	E
09M	16.92	25.00	30.8	03	08.31	04	11.08
15M	25.25	33.30	39.2	08	16.62	07	19.39
23M	35.90	44.30	50.3	10	27.70	11	30.47
25M	38.96	47.10	53.1	11	30.47	12	33.24
37M	55.42	63.50	69.4	17	47.09	18	49.86

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

1:1

D-SUB 90° 7.2mm MALE
 Rivet W/Boardlock Fix Screws

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日: 2003/08/25

DRAWING.

APPROVED

± 0.3

C0550-XXMBCAGB

A

Jane

1 2 3 4 5 6 7 8