


**WIRE ADDRESS**

P1	P2
1 <u>Spiral Shield</u>	Tinming
2 <u>White</u>	Tinming

**PACKGING MANNER**

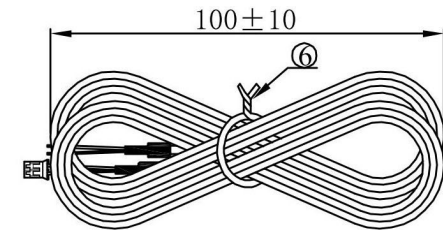

**PASS PINOUT TEST:**

- A: 100% OPEN/SHORT.
- B: CONTACT RESISTANCE: 10 Ω/MAX.
- C: INSULATION: 5 Ω/MIN
- D: HI-POT: DC300V/ 1 MIN

NO	PART	Specification	UNIT	QTY
⑥	TIE	Cable Tie L:170mm Black	PCS	1
⑤	TUBE	Heat shrinkable tube:Ø1.5*22mm Black	PCS	2
④	TUBE	Heat shrinkable tube:Ø3.0*15mm Black	PCS	2
③	TER	2.0mm TERMINAL PHOSPHOR BRONZE MATERIAL TIN PLATED(T2003 Series)	PCS	2
②	HSG	PH:2.0mm 2P HSG / H2003-02PSW000R	PCS	1
①	WIRE	UL1533 26AWG*1C+S Color:Gray L:1000mm	PCS	1

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD.  
核准 Hedy

DWG.  
製圖 Hedy

DATE 制表日  
2011/07/29

SCALE  
比例 參考

UNIT  
單位 M M

PAGE  
張數 1 OF 1

TOLERANCE  
容許公差  
.0 ±  
.00 ±  
ANG. ±

SIZE.  
紙張尺寸 A 4

REV.  
版次 A

PART NAME 品名  
XX LNMIC A H2003-02PSW(JST PH2.0mm 1X2P HSG WHITE COLOR)+UL1533 26AWG T/L=1,000mm(INCLUDING HOUSING & STRIPPED) WHITE WIRE\*1C · SHIELD WIRE(WIHT TUBE)\*1C JACKET:GRAY COLOR+END SIDE IS STRIPPED & TINNED L=2.0mm PACKING:10CM AFTER COILING ROHS

PART NO.  
料號 AR000-E3070003R