

ELECTRICAL CHARACTERISTICS



Contact Current Rating: 3 Amperes.
Dielectric Withstanding Voltage: AC 500V at sea level.
Insulation Resistance: 1000 Megohms Min.
Contact Resistance: 30 Milliohms Max.
Operation Temperature: -55°C to +105°C.

Material


Contact: Copper Alloy.
Insulator: PBT. (Select PA6T / LCP / PA9T)
Shell: SPCC.
Z-Piece: Copper Alloy.
Screw: Copper Alloy.
Rivet: Copper Alloy. or Zinc.

Note:


No.	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

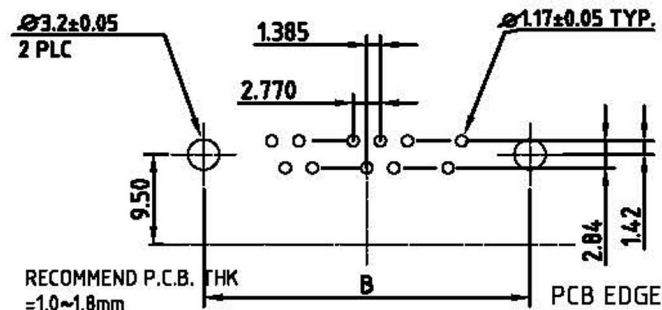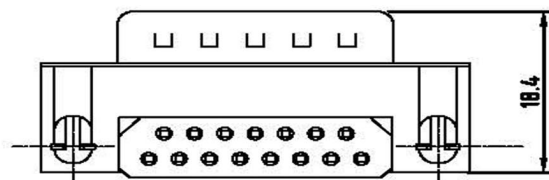


*C0550-XXAACXXBR
*C0550-XXAAEXXBR



*C0550-XXABCXXBR
*C0550-XXABEXXBR



*C0550-XXABBXXBR
*C0550-XXABDXXBR



RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准 BETTY

DWG.
製圖 BETTY

DATE 制表日
2008/02/18

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差
.0 ± 0.3
.00 ± 0.25
ANG. ± 2°

SIZE
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

D-SUB RIGHT ANGLE 7.2MM XXP MALE W/EMI
BLACK INSULATOR ROHS

PART NO.

料號 C0550-XXAXXXXBR