

Technical Data

Material (block)

- Contact: Brass (Cu Zn)
- (metal housing) Cu/Ni, tin plated
- Terminal screw: Steel galvanized and chromitized
- Surface of solder tail: Tin plated
- Insulator body: Nylon 6.6 (housing) (UL 94 V-0)





Electrical

- Current rating: 15 Amp
- Resistance to tracking: 5M Ohm
- Dielectric Strength: 2500V
- Insulation Withstands Voltage: AC 1500V/Min 300V
- Rated Voltage: 300V
- Conductor Size: 0.5 to 2.5mm²
- Stripping Length: 6.5 to 7mm
- AWG: 24-12

Mechanical

- Operating temperatures: -40°C to +105°C
- Short time peak temperature: +200°C max

HOW TO ORDER

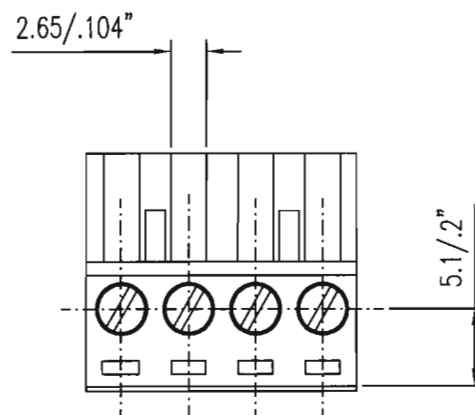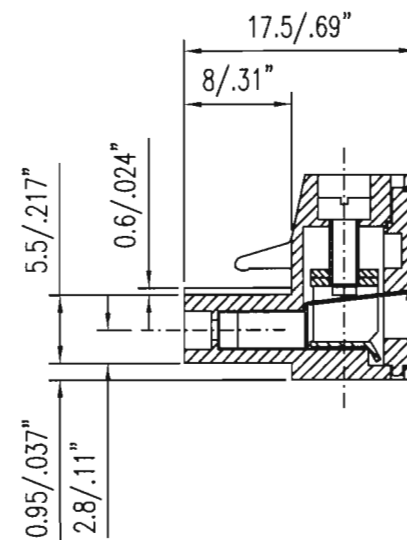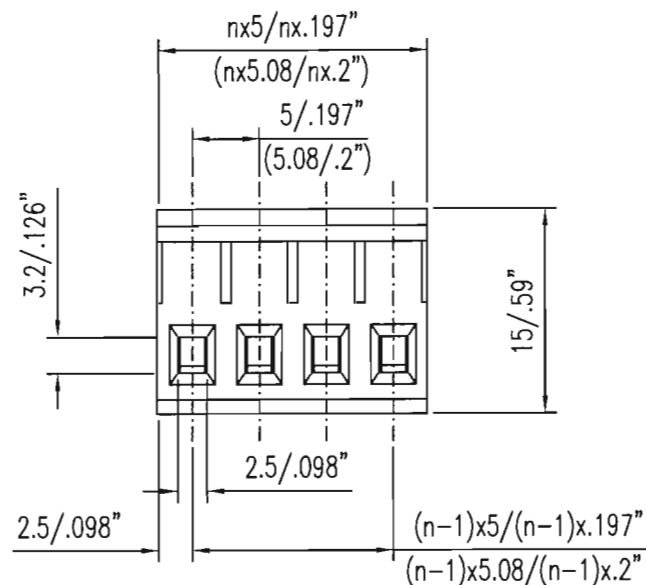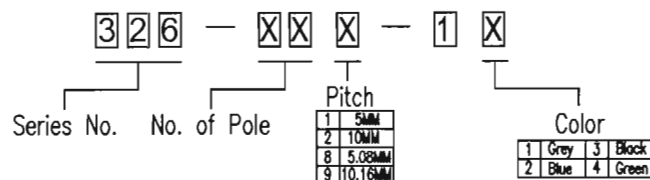

www.karson-tech.com.hk

TITLE: Series 326 Terminal Block

PART NO.: 326-XXX-1X

DWG NO.: KB1402-3
REVISION: 03

CUSTOMER NO.:
PROJECT NO.:

DATE: 21 AUG 02
TOLERANCE:

UNIT: MM
MATERIAL:

SCALE: NTS
DRAWN BY: KEVIN

SHEET: 1 OF 1
CHECK BY: 13

APPROVE BY: