



SPECIFICATION FOR LED LAMP

PART NO. : LT1822-81-HE

T-1 3/4 (5mm) ROUND TYPE

Approved by: *Fang Po Wang* Prepared by: *Amy*

LEDTECH ELECTRONICS CORPORATION

5TH FL,NO.542-5,CHUNG CHENG ROAD,
HSIN-TIEN CITY,TAIWAN.

TEL : 886-2-22186891

FAX : 886-2-22181222,22182894



T-1 3/4 (5mm) ROUND TYPE
PART NO. : LT1822-81-HE

Page : 1/4


Features

- * High intensity
- * Reliable and rugged
- * Popular T-1 3/4 diameter package
- * Low current requirement
- * IC compatible

Description

The green lamps are made with GaP chips
and White diffused epoxy resin.

Package Dimensions

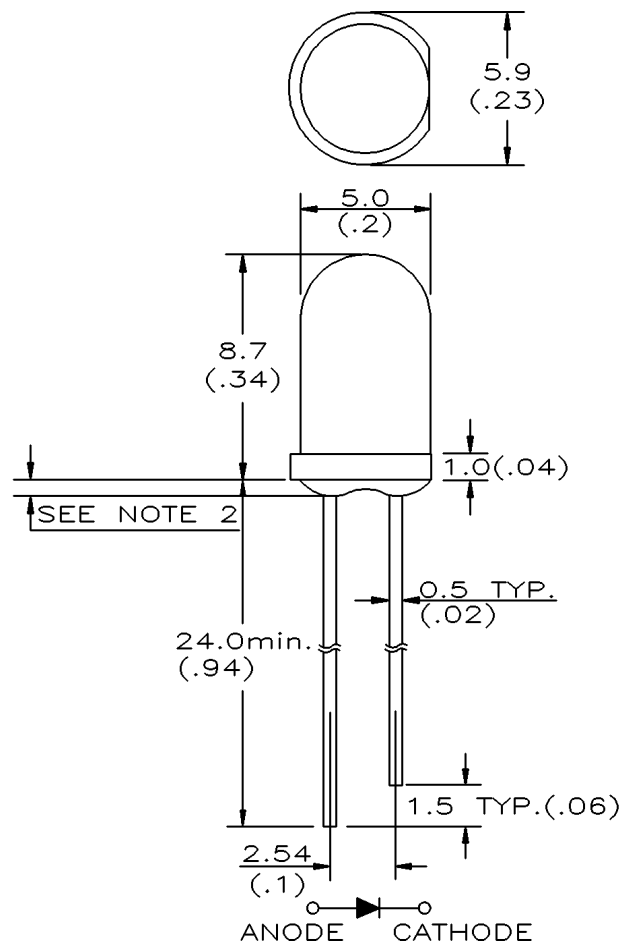

Notes :

1. All dimensions are in millimeters (inches).
2. Protruded resin under flange is 1.0mm (.04") max.
3. Tolerance is $\pm 0.25\text{mm}$ (0.01") unless otherwise noted.

Part No.	Led Chip		Lens Color
	Material	Emitting Color	
LT1822-81-HE	GaP	Green	White Diffused



T-1 3/4 (5mm) ROUND TYPE
PART NO. : LT1822-81-HE

Page : 2/4

Absolute Maximum Ratings at Ta=25°C :

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	72	mW
Reverse Voltage	Vr	5	V
D.C. Forward Current	If	30	mA
Peak Current (1/10 Duty Cycle,0.1ms pulse width)	If (Peak)	100	mA
Operating Temperature Range	Topr	-25 to +85	°C
Storage Temperature Range	Tstg	-40 to +100	°C
Lead Soldering Temp. (1.6mm from body) for 5 seconds		260	°C


Electrical and Optical Characteristics :

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Intensity	Iv	If=20mA	30	60		mcd
Forward Voltage	Vf	If=20mA		2.1	2.4	V
Peak Wavelength	λ_p	If=20mA		567		nm
Dominant Wavelength	λ_d	If=20mA		572		nm
Reverse Current	Ir	Vr=5V			100	μA
Viewing Angle	$2\theta_{1/2}$	If=20mA		40		deg
Spectrum Line Halfwidth	$\Delta\lambda$	If=20mA		30		nm




T-1 3/4 (5mm) ROUND TYPE
PART NO. : LT1822-81-HE


Typical Electrical / Optical Characteristics Curves :

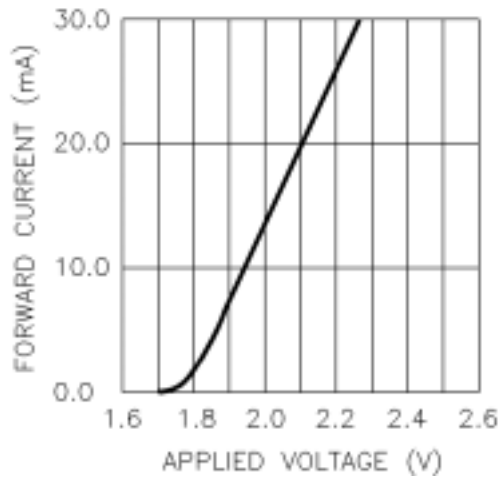


Forward Current vs. Forward Voltage

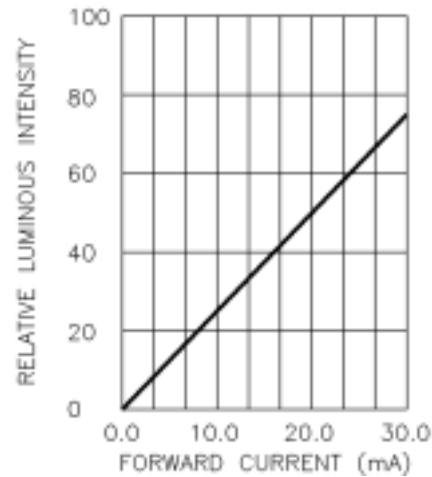


Forward Current vs. Relative Luminous Intensity

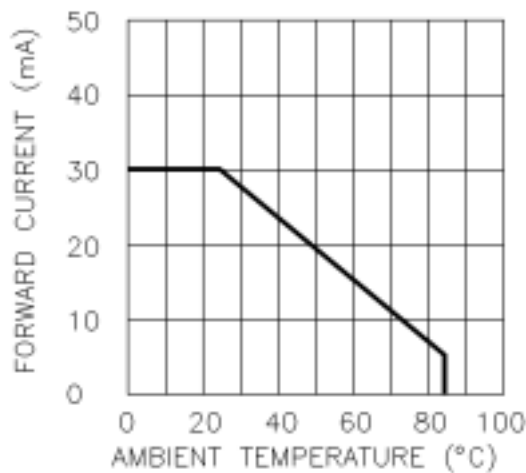

Ambient Temperature vs. Forward Current

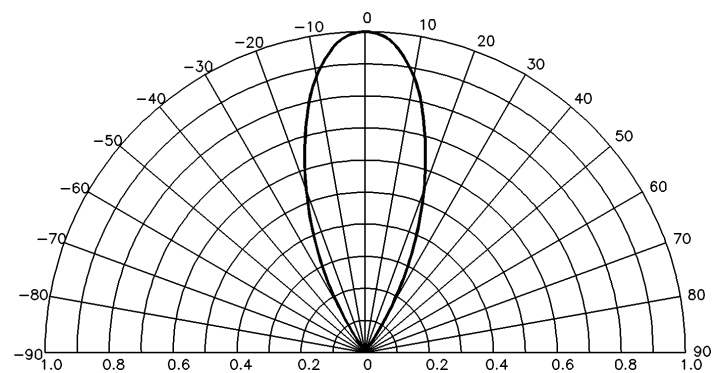

Radiation Diagram

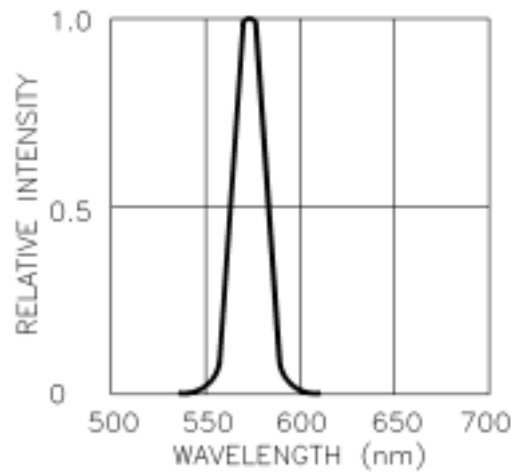

Relative Intensity vs. Wavelength



T-1 3/4 (5mm) ROUND TYPE
PART NO. : LT1822-81-HE

Page : 4/4

Reliability Test Method :

Test Item	Test Condition	Duration Time
Operation Life	If=20mA / Ta=25°C	168 hrs
Storage at High Temperature	Ta=100°C	168 hrs
Storage at Low Temperature	Ta=-40°C	168 hrs
Storage at High Temperature/High Humidity	Ta=85°C / RH=85%	168 hrs
Operating at High Temperature	Ta=85°C / If=20mA	168 hrs
Operating at Low Temperature	Ta=-25°C / If=20mA	168 hrs
Thermal Shock	Ta/T=100°C/30min~ - 40°C/30min	10 cycles
Solderability	Tsol=260°C	5 sec

Criteria for Judging The Damage :

Item	Symbol	Test Condition	Criteria for Judgment	
			Min.	Max.
Forward Voltage	Vf	If=20mA	— — —	Initial Data x1.1
Reverse Current	Ir	Vr=5V	— — —	100 μ A
Luminous Intensity	Iv	If=20mA	Initial Data x0.8	— — —

Precautions :

If the lead is formed, the lead should be formed up to 5mm from the body of the device without forming stress to the resin. Soldering should be performed after lead forming.