


.200" (5.08mm) Center Crimp Terminal Housing

MHU Series


Features:

- 1-20 Circuits
- With or without locking ramp
- Nylon (UL 94V-2)
- Mates with .045 (1.14mm) square or round pins
- Accepts double cantilever crimp terminal
- Housing available with integrally molded polarizing keys
- Terminal Retention to Housing-8lbs. (3.63kg) minimum

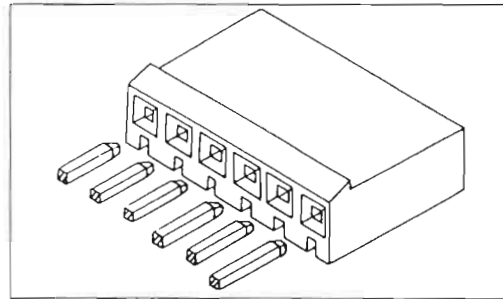


Specifications:

- Current rating: 7A AC, DC
- Voltage rating: 250V AC, Maximum
- Temperature range: -25°C ~ + 90°C
- Contact resistance: Initial Value/10mΩ max.
After environmental testing/20mΩ max.
- Insulation resistance: 1,000 MΩ min
- Withstand Voltage: 1500V AC/minute
- Applicable wires: AWG #22 ~ #18

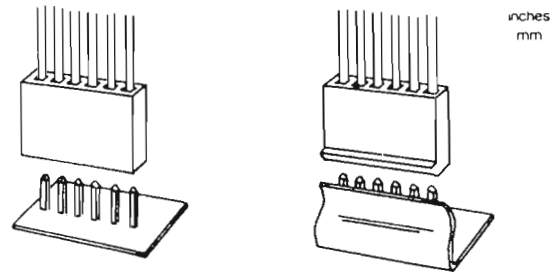

inches
mm

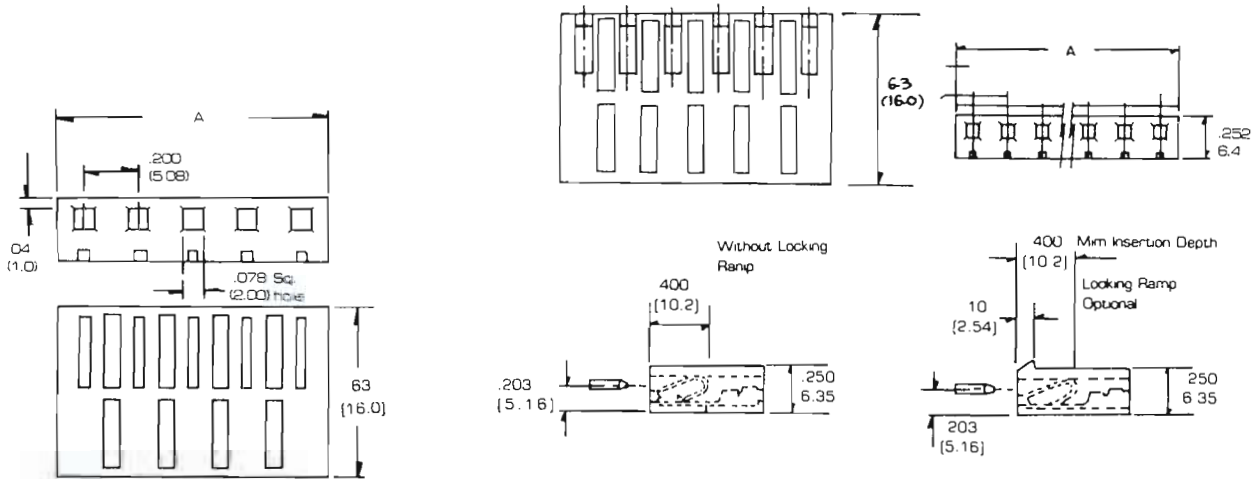

Dimensional Information MHU Series

| Circuits | Dim. A | Circuits | Dim. A | Circuits | Dim. A | Circuits | Dim. A |
|----------|----------------|----------|----------------|----------|----------------|----------|-----------------|
| MHU-1 | .200 5.08 | MHU-6 | 1.200 30.48 | MHU-11 | 2.200 55.88 | MHU-16 | 3.200 81.28 |
| MHU-2 | .400 10.16 | MHU-7 | 1.400 35.56 | MHU-12 | 2.400 60.96 | MHU-17 | 3.400 86.36 |
| MHU-3 | .600 15.24 | MHU-8 | 1.600 40.64 | MHU-13 | 2.600 66.04 | MHU-18 | 3.600 91.44 |
| MHU-4 | .800 20.32 | MHU-9 | 1.800 45.72 | MHU-14 | 2.800 71.12 | MHU-19 | 3.800 96.52 |
| MHU-5 | 1.000 25.40 | MHU-10 | 2.000 50.80 | MHU-15 | 3.000 76.20 | MHU-20 | 4.000 101.60 |