


5 PIN DIN JACK (KEY BOARD JACK) & MINI DIN (MINIATURE CIRCULAR CONNECTOR)

Material

Insulator: PBT + 30% glass Fiber (UL94V-0)
 Contact: Phosphor Bronze or Brass
 Contact Plated: Gold Over Nickel
 Shell: Phosphor Bronze or Brass
 Zinc Plated or Tin Plated

Specification:

Insulation Resistance: 100MΩ at 500 V.D.C.
 Dielectric Strength: 1,000V A.C./1 Minute
 Contact Resistance: 30mΩ Maximum.
 Rating: 100V A.C. 2A

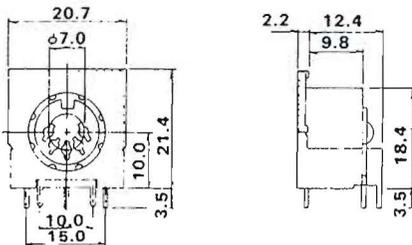


Ordering Information:

5-Pin Din Jack (Key Board Jack)
 Part No: KB-5-□

W-With Shell
 W/O-Without Shell

For Example: KB-5-W

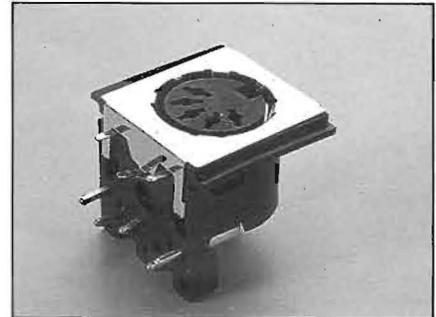


Mini Din Miniature Circular Connectors With Shell

Material:

Same As Keyboard Jack

Specifications

Rating: 100V AC 1A MAX or
 12V DC 2A MAX
 Insulation Resistance: 50MΩ MIN at 250V DC
 Dielectric Strength: 250V AC/1 minute
 Contact Resistance: 30mΩ MAX
 Insertion Force: 4.5kg MAX
 Withdrawal Force: 0.9~3kg

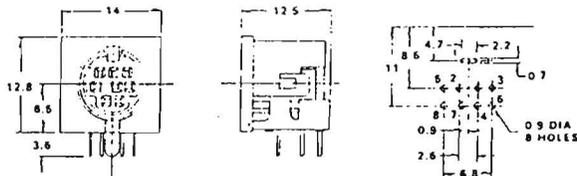


ARRANGEMENT OF CONTACTS						
NO OF CONTACTS	3	4	5	6	7	8
PART NO.	MDJ-033	MDJ-034	MDJ-035	MDJ-036	MDJ-037	MDJ-038
HOLE LAYOUT						

Ordering Information:

Mini Din (Miniature Circular Connectors)

MDJ-□ - □ W-With Shell For Example: MD-MDJ-03-W
 W/O-Without Shell
 PART NO:

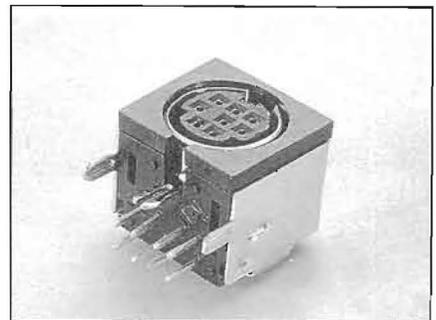

Mini Din Plug & Socket Cable Assembly Type

Plug: 3,4,5,6,7,8,9, P:N

Socket: 3,4,5,6,7,8,9, P:N

Mold Type Same Above.