
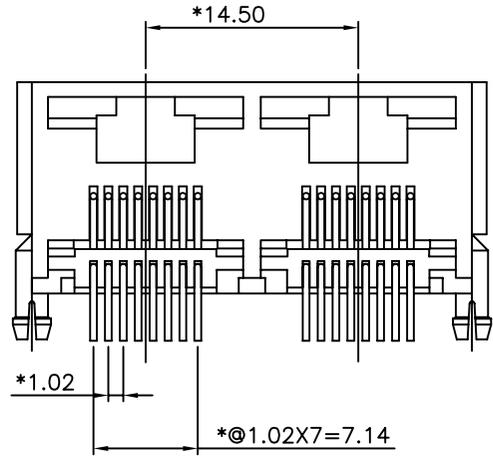
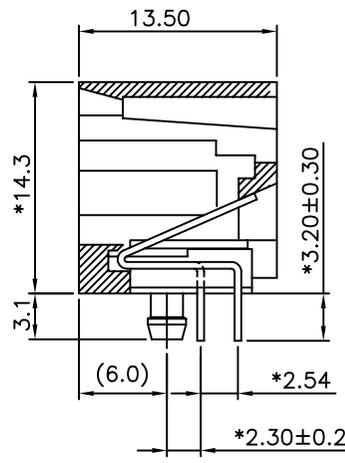


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

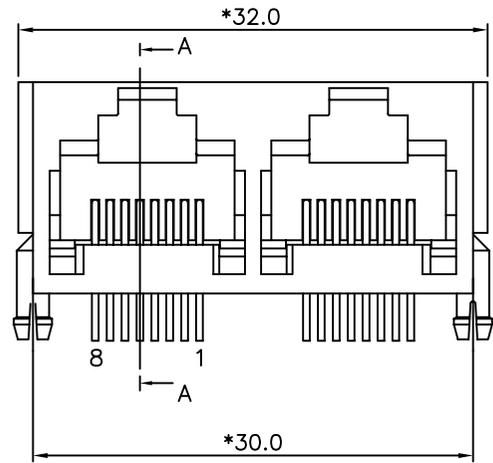

SECTION A-A

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 6. PCB RETENTION POST-SOLDER : 10 LBS MIN.


ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION : -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER : N352X-003-XX

- 1-3u" 2-6u" 01-8P8C POLYESTER BK.
- 3-15u" 4-30u" 02-8P8C HIGH TEMP. BK.
- 03-8P4C POLYESTER BK.
- 04-8P4C HIGH TEMP. BK.

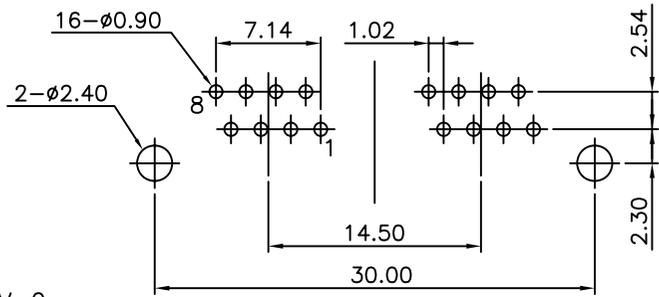

PC Board Layout Component Side Shown

Δ X0	0006900	NEW DESIGN	YANG	120308
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
VGT		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE 1/1	CHECKED
V-GENERAL Technology Co., Ltd.		Dimension Range Tolerance	X.X ±0.20 UNIT mm	APPROVED
Material/Plated/Notes		X.XX ±0.15	X.XXX ±0.10	SIZE A3
SEE NOTE		ANGLE ±5°	SHEET 1/1	
NAME		MINI L/P SIDE ENTRY DUAL JACK 8P		
Tooling No.		PART NO.	SEE NOTE	REV. 0
		DOC. NO.	NN350A003	

Design drawing