

VANSONIC ENTERPRISE CO., LTD.

8F.,No.7,Lane 16, Sec.2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.

TEL: +886-2-29626335




TEL: +886-2-29625220

E-MAIL: vansonic@ms4.hinet.net

1.	MODEL:	36CR08FN -M50NT(Clear Mylar) -M50ND(Black Mylar)							
2.	Dimension	Outer Diameter		36	mm.	Baffle Opening		32	mm.
		Height		Refer to Drawing .		Weight		7.5	Grams.
3.	Magnet	Materials		Rare Earth .		Size		ø 12.5X 1.5 mm.	
4	Nominal Lmpedance	8	Ω	±	15	%	At	1000	Hz.
5.	Power Rating	Normal		500		mW.	Maximum		1000 mW.
6.	Lowest Resonant Frequency	370		±		20		% Hz.	
7.	Output Sound Pressure Lever (S.P.L.)	79		±		3 db / 0.5 Watt .		0.5 Meter .	
		Average at		800,		1000,		1200, 1500 Hz.	
8.	Frequency Range	200		~		20000		Hz. Average S P L - 10 db.	
9.	Distortion	5	%	Maximum At		1000		Hz. 500 mW.	
10.	Abnormal Sound Test	Must Be Normal Test By				2.0		Volts. Sine Wave.	
11.	Load Test	White Noise With Weighted Filter				2.0		Volts.(RMS) 24 Hrs.	
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.							
		Current to the "+" or "Marked" Terminal.							

MOUNTING NOTICE


AT LEAST
0.8mm
FOR
DIAPHRAGM
MOVING

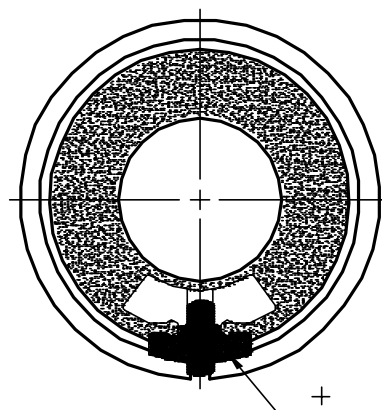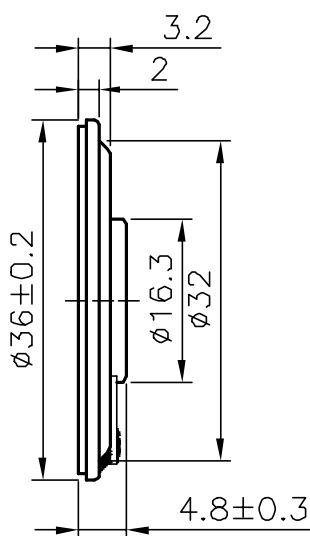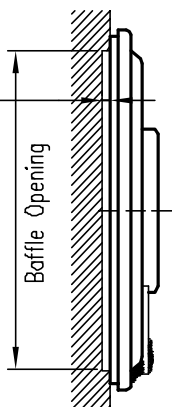

Unit : mm

Housing Material : METAL

36CR08FN-M50ND VOL:2.00(0.5W) DIS:0.5M VANSONIC
X:1.0000kHz *Y:79.69dB ZA:1.0000 SSR Fund.

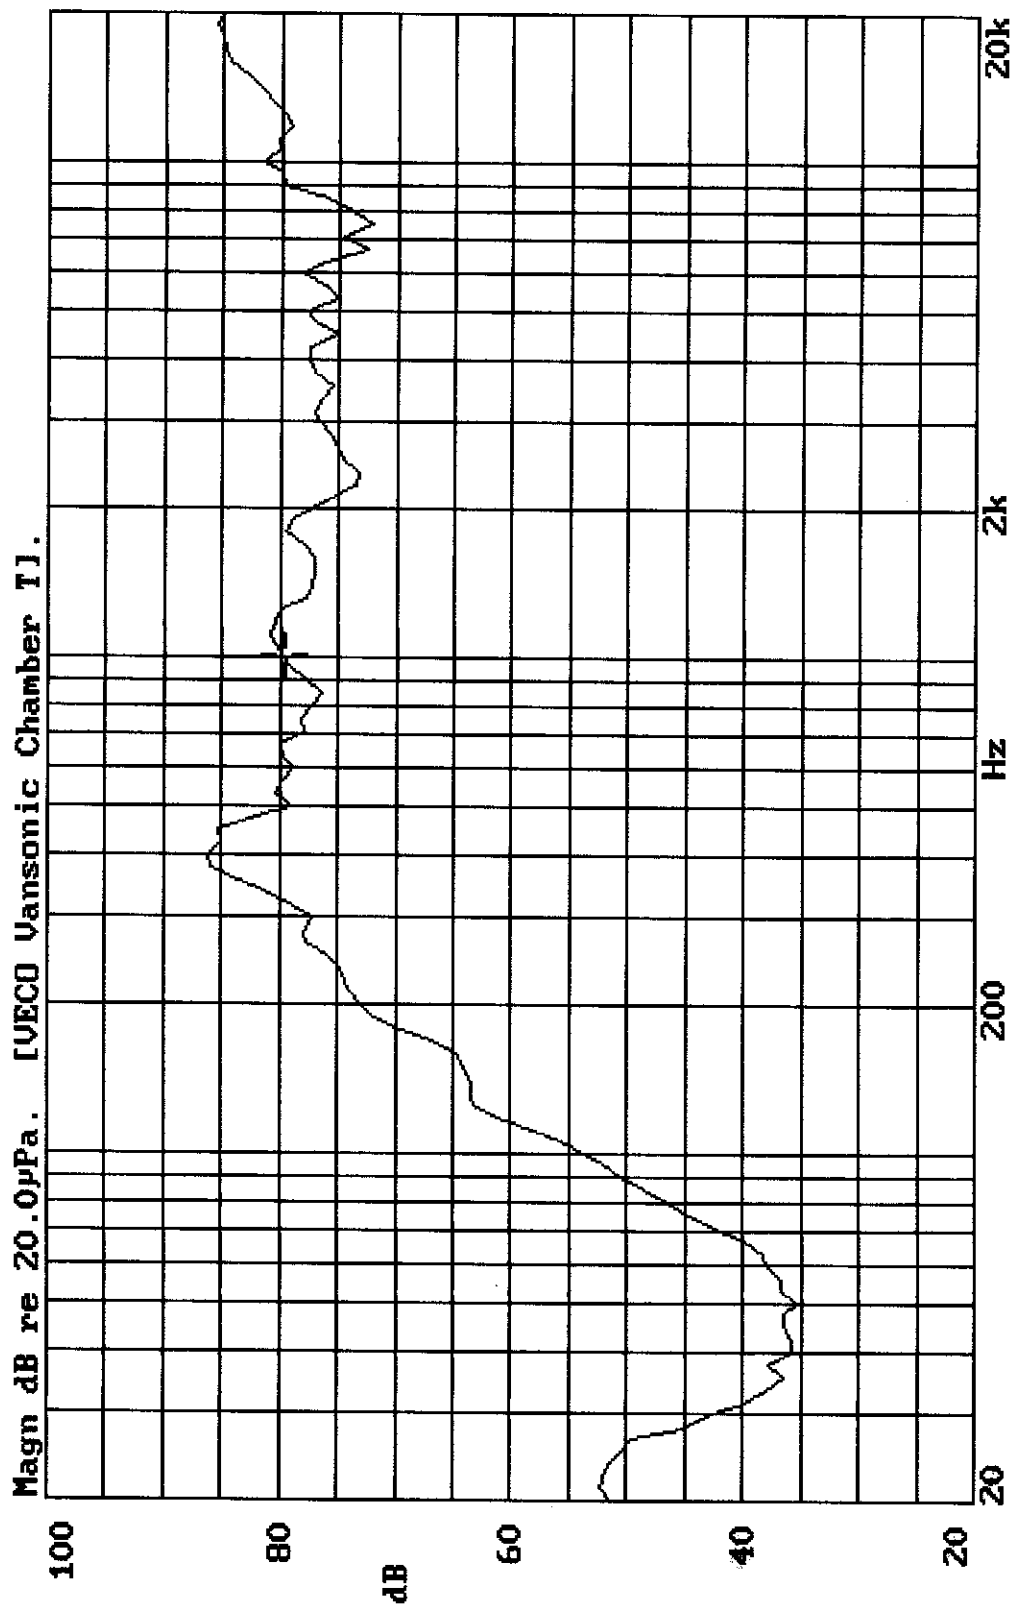

31-OCT-2001 10:28:59

Mode: SSR

