

Technical Data

Material (block)

- Contact: Brass (Cu Zn)
- (metal housing) Cu/Ni, tin plated
- Terminal screw: Steel galvanized and chromotized
- Surface of solder tail: Tin plated
- Insulator body: Nylon 6.6 (housing) (UL 94 V-0)





Electrical

- Current rating: 15 Amp
- Resistance to tracking: 5M Ohm
- Dielectric Strength: 2500V
- Insulation Withstands Voltage: AC 1500V/Min
- Rated Voltage: 300V

Mechanical

- Operating temperatures: -40°C to +105°C
- Short time peak temperature: +200°C max
- Fixing Hole: 1.3mm

HOW TO ORDER

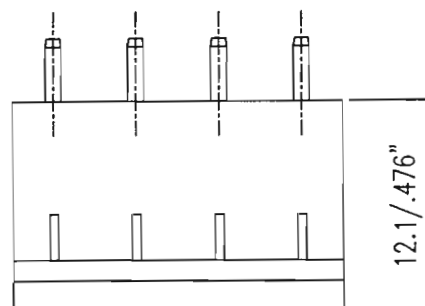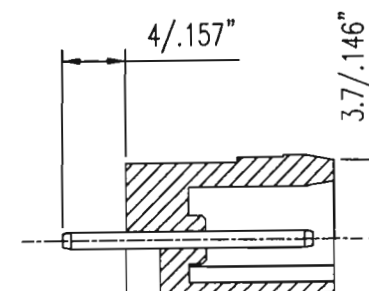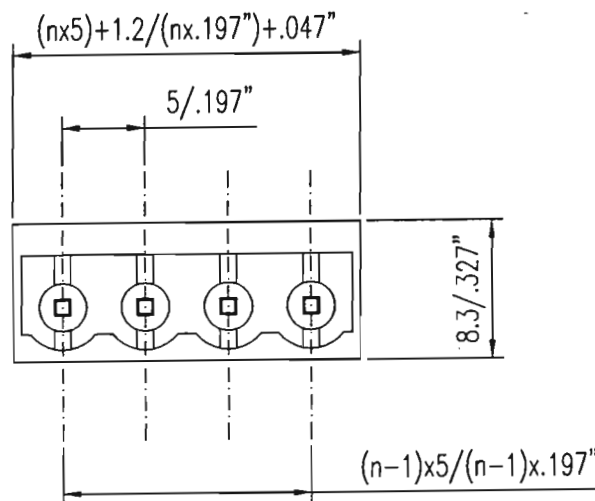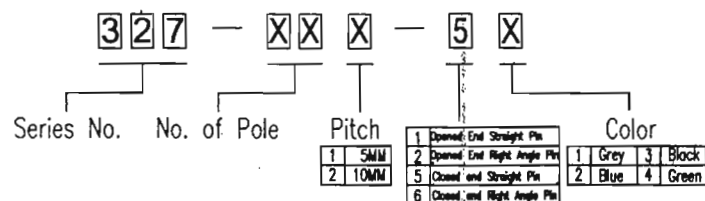

KARSON TECHNOLOGY LIMITED

TITLE: Type 327 Terminal Block (Closed End Straight Pin)

Unit 12,11/F., Vanta Industrial Centre, 21-33 Tai Lin Pai Road, Kwai Chung, N.T., Hong Kong.
 Tel : (852) 2421 0833 Fax : (852) 2421 9951
www.karson-tech.com.hk

PART NO. 327-XXX-5X
 DWG. NO. KB1504-1

DATE: 3 OCT 00 UNIT : MM SCALE: NTS
 DRAWING BY: Ackn APPROVED BY: Jan