




C055894A2

110 Delta Drive
 Pittsburgh, PA 15238
 Phone: 412/696-1333
 Fax: 412/696-0333
 Email:magnetics@spang.com

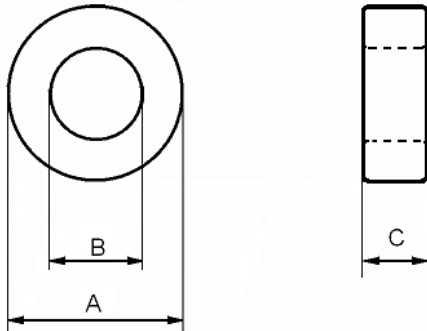

Permeability (μ)	A_L (nH/T ²)	Nominal DC Resistance (Ohms/mH)	B/NI Gauss per Amp. Turn
60	75 \pm 8%	0.110	11.9 (<1500 gauss)

Dimensions (mm)		
	Uncoated	Coated
O.D. (A)	26.9 nom	27.7 max
I.D. (B)	14.7 nom	14.1 min
Ht. (C)	11.2 nom	11.94 max

Markings		
XXXXXX	55894A2	X
Lot Number	Part Number	Inductance Grade

Physical Characteristics					
W_A (mm ²) Window Area	A_e (mm ²) Cross Section	L_e (mm) Path Length	V_e (mm ³) Volume	Weight (grams)	Box Quantity (pieces)
156	65.4	63.5	4,150	33.7	400

Winding Turn Length (mm)	
Winding Factor	Length/Turn
100% (Unity)	52.3
60%	46.6
40%	41.0
20%	38.5
0%	37.6

Wound Coil Dimensions (mm)	
Maximum O.D. (u.w.f.)*	37.3
Maximum HT. (u.w.f.)*	24.0

*u.w.f. – unity winding factor

Surface Area (mm ²)	
Unwound Core	2,470
40% Winding Factor	3,380

