

Technical Data

Material (block)

- Contact: Brass (Cu Zn)
- (metal housing) Cu/Ni, tin plated
- Terminal screw: Steel galvanized and chromated




- Surface of solder tail: Tin plated
- Insulator body: Poly butylene Terephthlene-PBT(30% Glass Filled) (UL 94 V-0)

Electrical

- Current rating: 10 Amp
- Resistance to tracking: 5M Ohm
- Dielectric Strength: 2500V
- Insulation Withstands Voltage: AC 1500V/Min
- Rated Voltage: 250V
- Conductor Size: 0.5 to 4mm²
- Stripping Length: 7.5 to 8mm²

Mechanical


- Operating temperatures: -30°C to +120°C
- Short time peak temperature: +200°C max

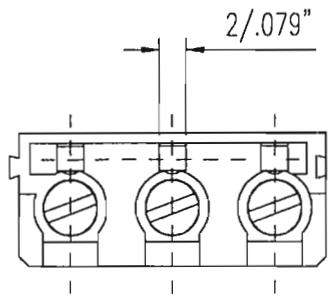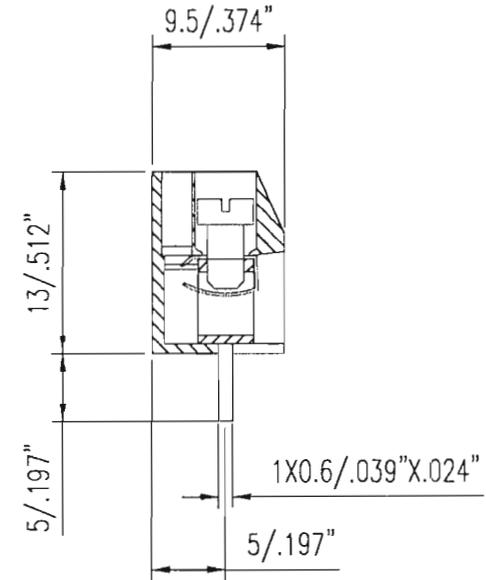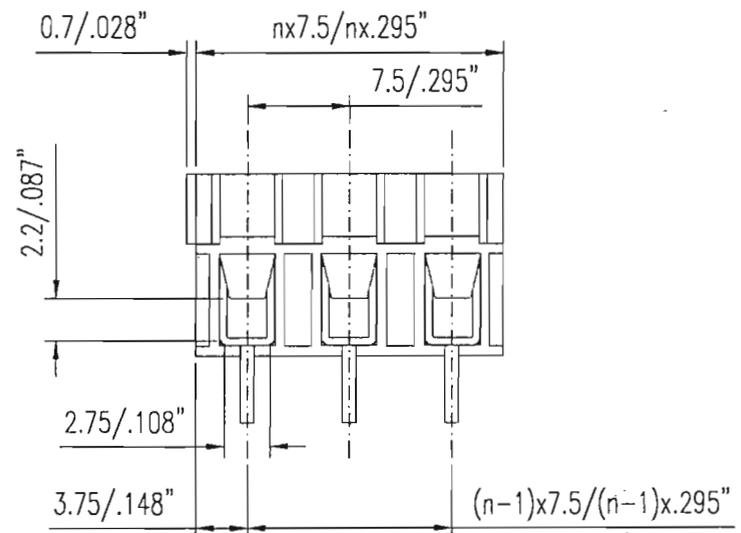

Recommended PC-Board-Holes diameter: $\phi 1.2\text{mm}$ to $\phi 1.4\text{mm}$
n = number of contacts

****Notice:**
To avoid accumulated tolerance-variations of Terminal-Blocks to PC - Board spacing limit the number of contacts to not more than 24 contacts per row

HOW TO ORDER

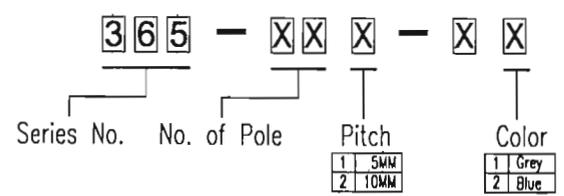

KARSON TECHNOLOGY LIMITED

TITLE: Type 365 Connector

Unit 12,11/F., Vanta Industrial Centre, 21-33 Tai Lin Pai Road, Kwai Chung, N.T., Hong Kong.
Tel : (852) 2421 0833 Fax : (852) 2421 9951
www.karson-tech.com.hk

PART NO. 365-XXX-XX
DWG. NO. KB1285-0

DATE 19 SEP 98 SCALE: NTS
UNIT: MM DRAWING BY C.L.