

Box Header 2.54 x 2.54 mm

MATERIAL






Insulator: PBT +30% Glass Fiber,
(UL94V-0)
Contact: Brass
Contact Plated: Gold over Nickel or Tin

SPECIFICATION

Current Rate: 1A
Operation Temperature: -55 °C to +105 °C
Contact Resistance: 10m Ohm Max. at
DC 1A
Insulation Resistance: 1000m Ohm Min. at
DC 500V
Dielectric Strength: AC 500V Per
minute

FEATURES

- *Box header body helps maximum packaging density.
- *Available with wrap post tail header.
- *Available in straight or right angle pins.

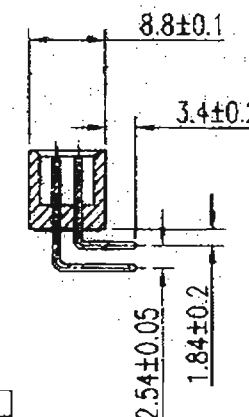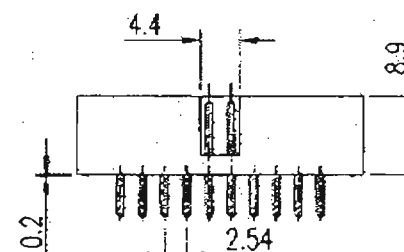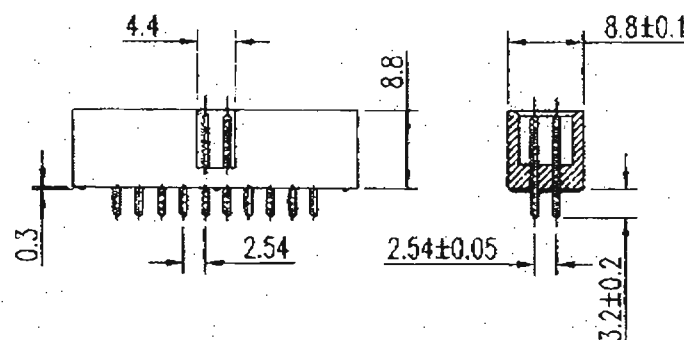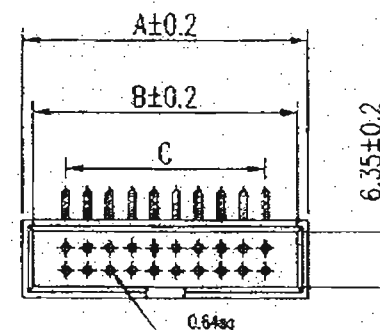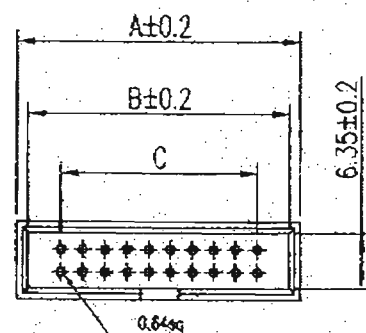

HOW TO ORDER

730 - XX X - X X
Series No. No. of Pole Colour Material

SIZE	A mm	B mm	C mm
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.85
24	38.08	35.88	27.94
26	40.62	38.42	30.48
30	45.70	43.50	35.58
34	50.80	48.58	40.64
40	58.40	56.20	48.26
44	63.48	62.28	53.34
50	71.10	68.90	60.96
56	78.72	76.52	68.58
60	83.80	81.60	73.65
64	88.88	86.68	78.74

KARSON TECHNOLOGY LIMITED

TITLE: Box Header

Unit 12,11/F., Vanta Industrial Centre, 21-33 Tai Lin Pai Road, Kwai Chung, N.T., Hong Kong.
Tel : (852) 2421 0833 Fax : (852) 2421 9951 www.karson-tech.com.hk

PART NO. 730-XXX-XX
DWG NO. KN-1263-1

DATE 12 JAN 99
UNIT : MM

SCALE: NTS
DRAWING BY B.H.