

G1411 = Product group; Product group discount G 14 1_

KLASING PVC Control Cables

Twisted, Unshielded
Cross-Section: 0,14mm²
Colour: Grey
Series: LIYY


Part Nr.	Part description
LIYY0214	Control Cable 2x0,14mm ² Grey
LIYY0314	Control Cable 3x0,14mm ² Grey
LIYY0414	Control Cable 4x0,14mm ² Grey
LIYY0514	Control Cable 5x0,14mm ² Grey
LIYY0614	Control Cable 6x0,14mm ² Grey

Construction

Conductor Insulation:.....PVC YI 2
Conductor Colours:.....DIN 47 100
Conductor Composition:18x0,10mm
Outer Jacket:.....PVC YM 2
Colour:Grey (RAL 7032)
Flammability:Flame Resistant IEC332.1

Technical Specifications

Rated Voltage:300V
Test Voltage:1,2kV
Temperature Range Moving:-10...+70°C
Temperature Range Stationary:-20...+70°C
Insulation Resistance, Min.:100MΩxkm
Conductor Resistance, Max.:135Ω/km

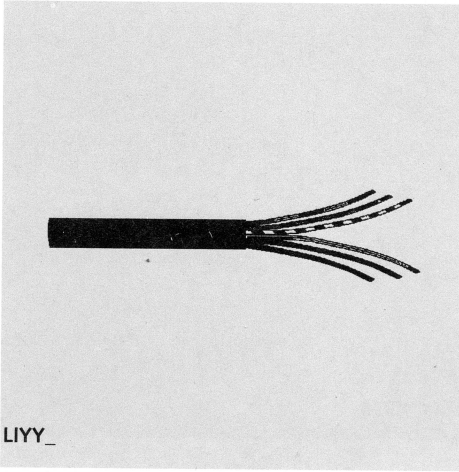

Part Nr.	Cross-Section [mm ²]	OuterØ [mm]
LIYY0214	2x0,14	3,10 ±0,15
LIYY0314	3x0,14	3,20 ±0,15
LIYY0414	4x0,14	3,50 ±0,15
LIYY0514	5x0,14	4,00 ±0,15
LIYY0614	6x0,14	4,30 ±0,15

Terms of Delivery

Minimum order quantity: 1 PKU = 100m ring

Manufacturer: Klasing

<http://www.klasing-kabel.de>