





reference

2J550

mounting position	ON GLASS / PLASTIC
nominal impedance	50 Ohms
frequency	AMPS 824-894MHz / GSM 900, 1800 MHz PCN 1,9GHz / UMTS 2,1GHz/ Bluetooth 2,4GHz
polarisation	VERTICAL
gain	3 dBi
vswr	<2:1
power handling	25W
cable	2.5m RG174
connector	FME Female
housing size	72 mm x 25mm x 4,7 - 6,3mm
working temperature	-40°C to +85°C

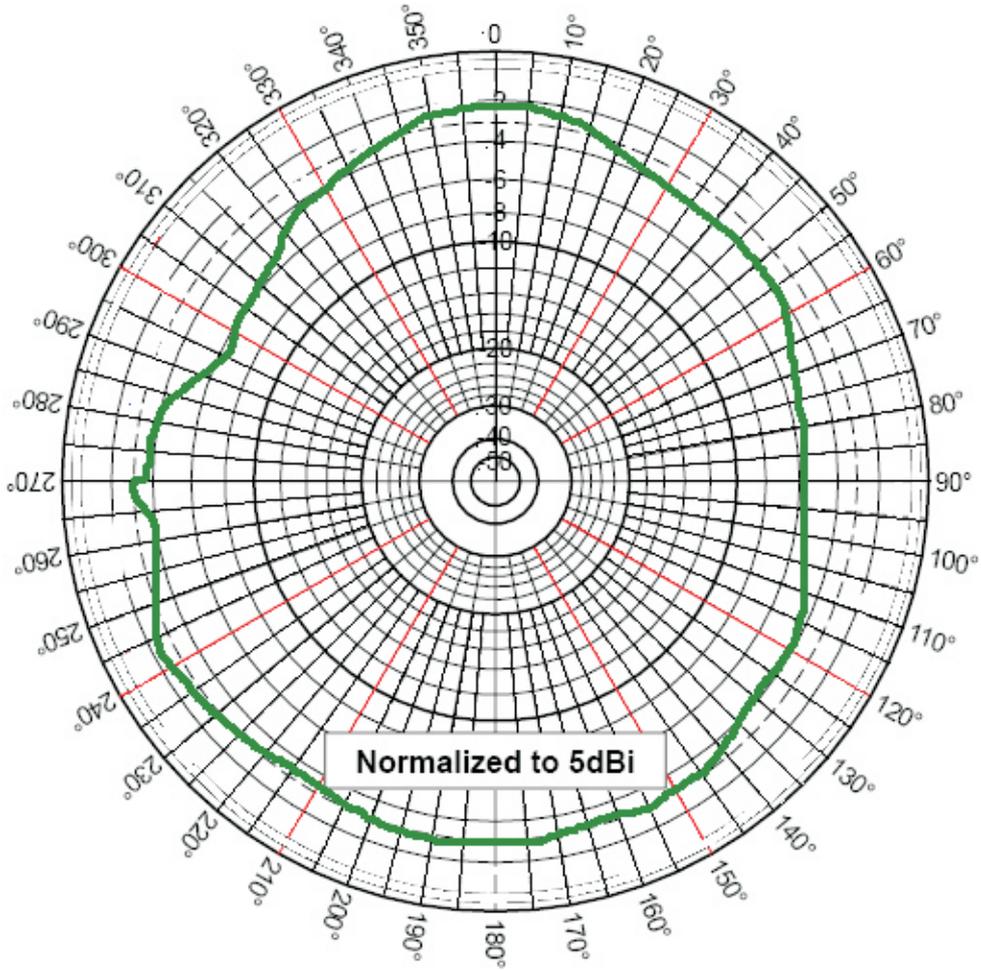


Azimuthal Pattern (X, Y or E-Plane)

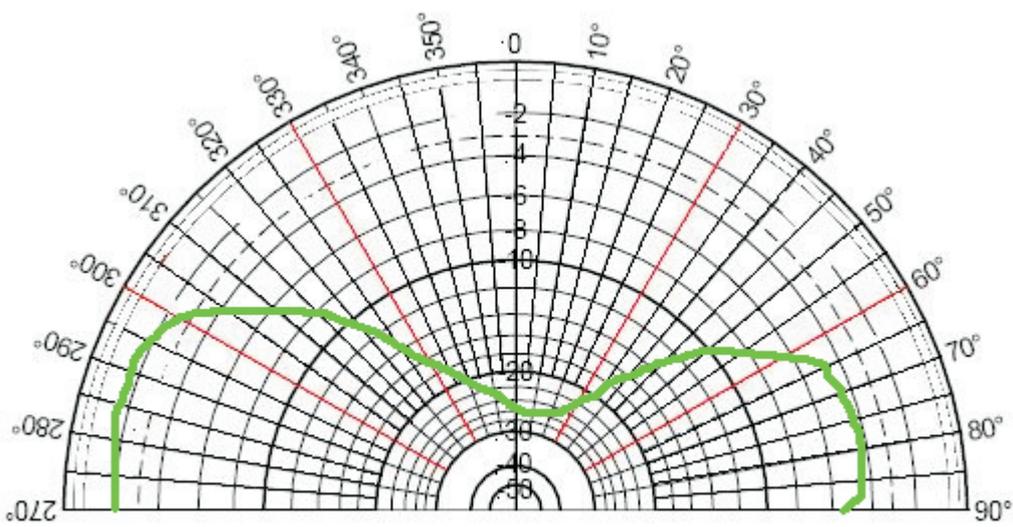


Elevation Pattern (Z, Y or H-Plane)


900 MHz

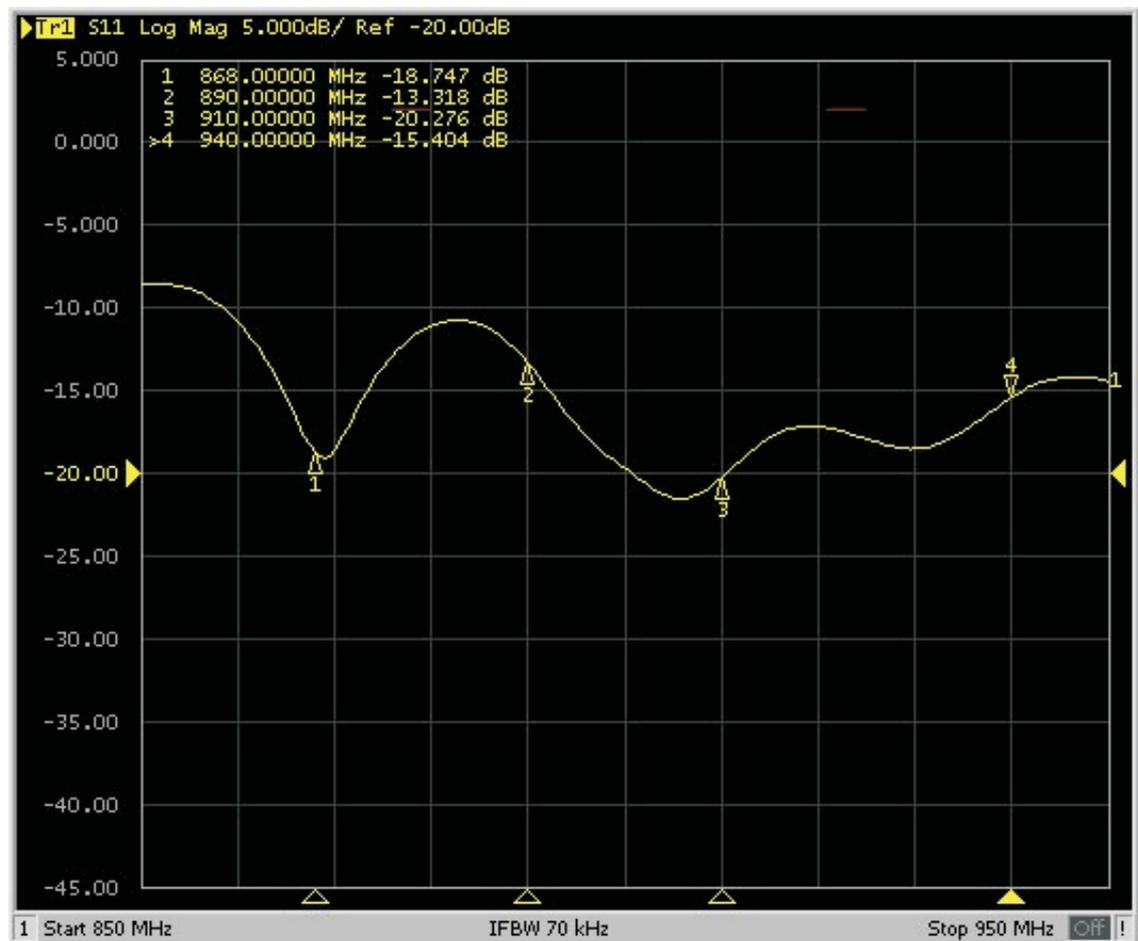

1800/1900 MHz

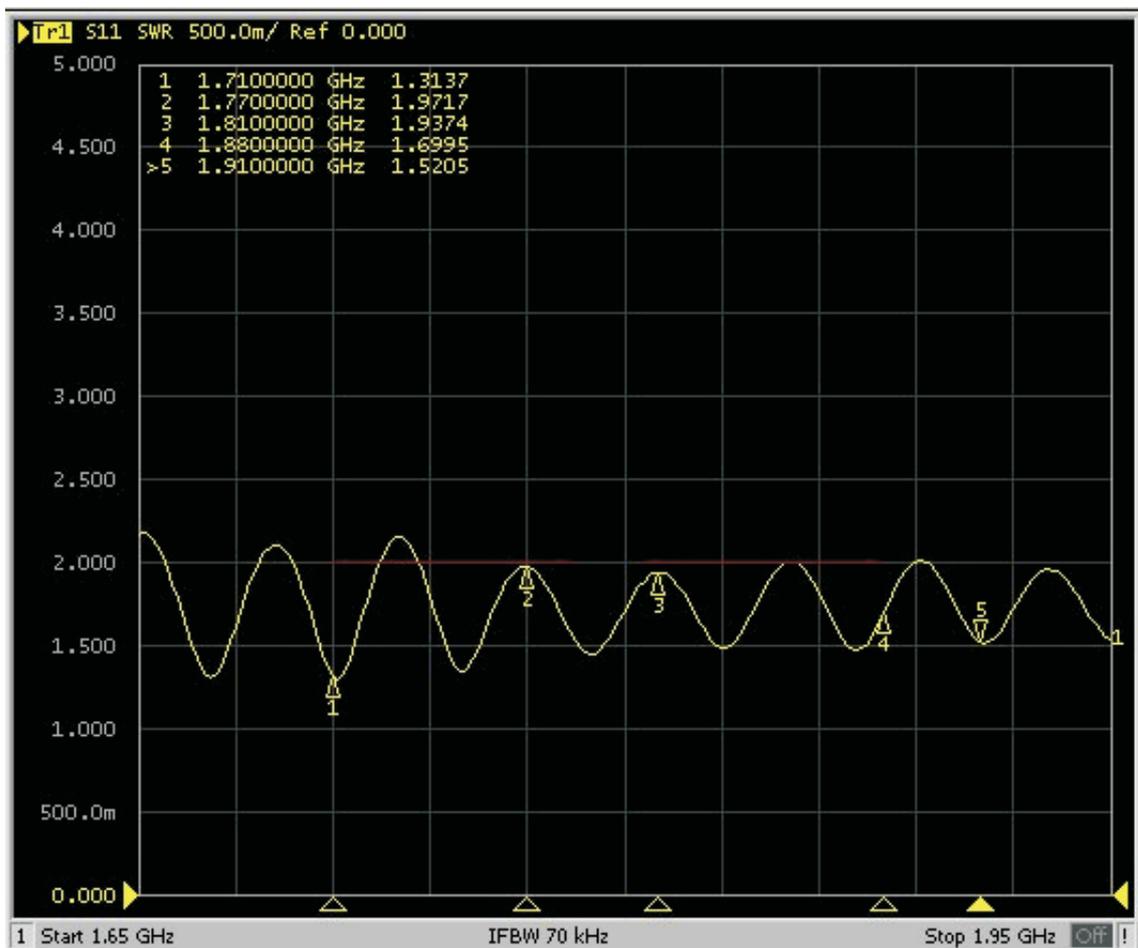

2100 MHz

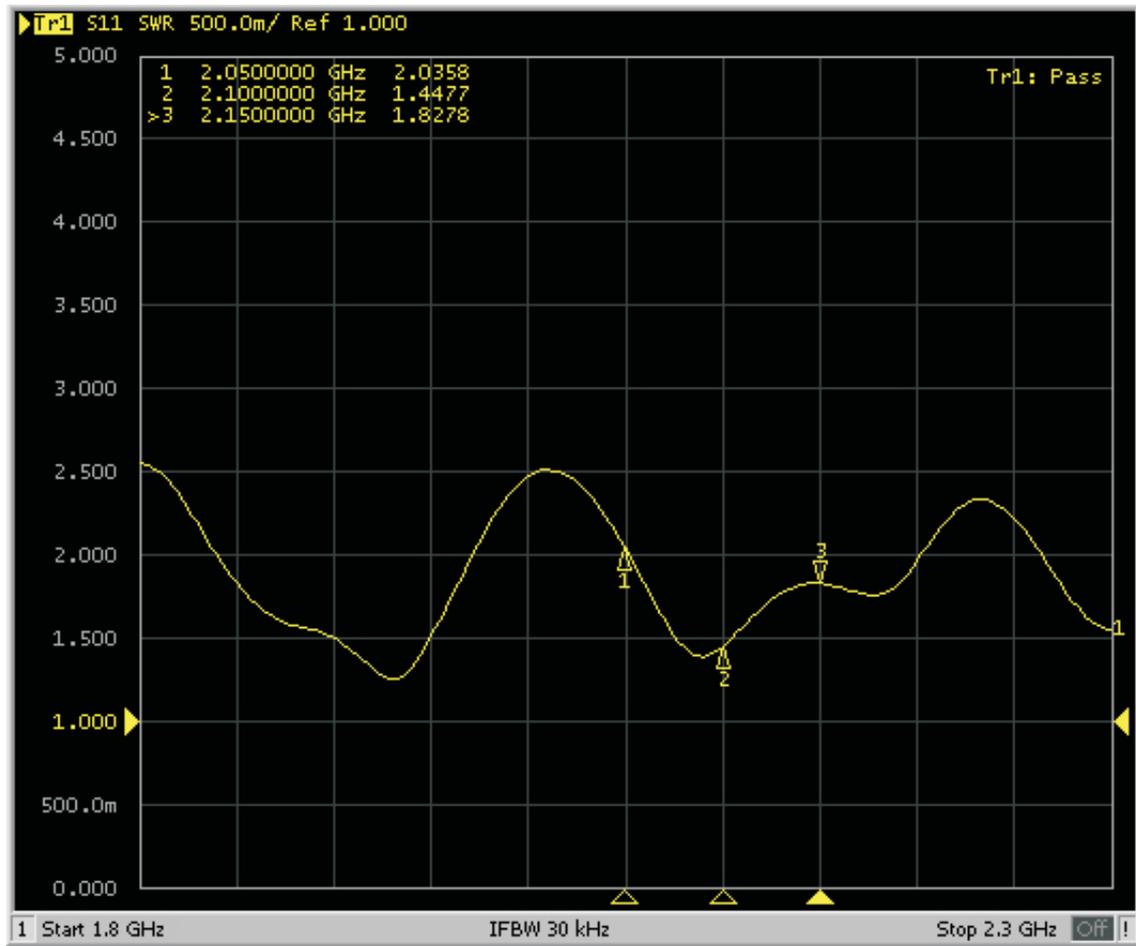

2400 MHz

