

Technical Data

Material (block)

- Contact: Brass (Cu Zn)
- (metal housing) Cu/Ni, tin plated
- Terminal screw: Steel galvanized and chromated
- Surface of solder tail: Tin plated
- Insulator body: PBT (housing) (UL 94 V-2)




Electrical

- Current rating: 12 Amp
- Resistance to tracking: 5M Ohm
- Dielectric Strength: 2500V
- Insulation Withstands Voltage: AC 1500V/Min
- Rated Voltage: 300V
- Conductor Size: 0.5 to 4mm²
- AWC: 26 - 18


Mechanical

- Operating temperatures: -40°C to +105°C
- Short time peak temperature: +200°C max

KARSON
TECHNOLOGY

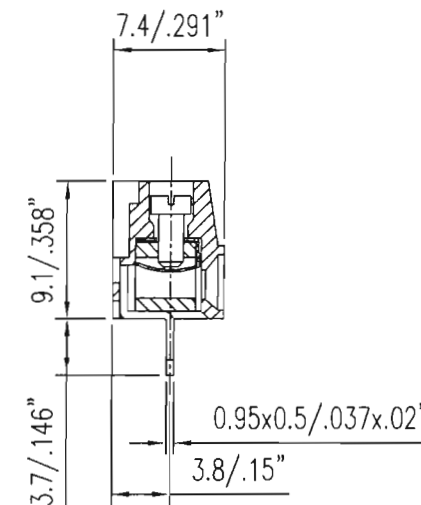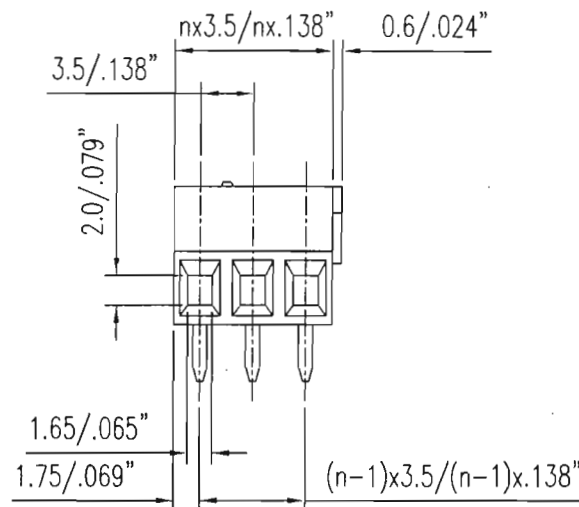

HOW TO ORDER

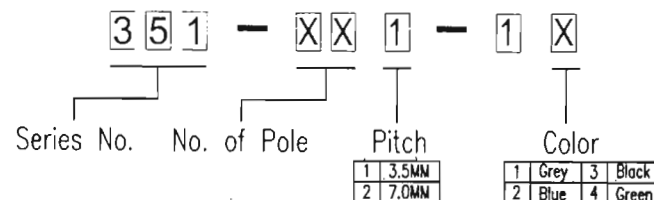

**Notice:

To avoid accumulated tolerance-variations of Terminal-Blocks to PC - Board spacing limit the number of contacts to not more than 24 contacts per row

Recommended PC-Board-Holes diameter: Ø1.2mm to Ø1.4mm
n = number of contacts

KARSON TECHNOLOGY LIMITED

TITLE: **351 SERIES TERMINAL BLOCK**

www.karson-tech.com.hk

PART NO.:


DWG NO.: KB1565-0

DATE: 24 AUG 01

UNIT: MM

SCALE: NTS

SHEET: 1 OF 1



REV.: 00

PROJECT NO.:

DRAWN BY: CHING

CHECK BY:

APPROVE BY: