




# 131 series

**SIP SOCKET(SCREW PIN)2.54mm**

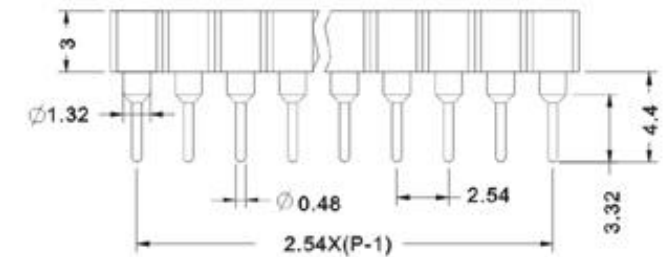

## Material and Finish:

Insulator: Glass Filled Thermoplastic PPS UL 94V-0  
 Contact: (BeCu), Beryllium Copper  
 Finishes: Outer Shield: Tin Plated  
 Inner Contact: Gold Plated

## Performance Characteristics:

Voltage Rating: AC 250V  
 Current Rating: 1AMP  
 Withstanding Voltage: 1000V AC For 1Minute  
 Contact Resistance: 15 Milliohms Max  
 Insulator Resistance: 1000 Megohms Min  
 Operating Temperature: -55° C--+105° C  
 Contact Style: Four-Fingered Inner Contact

## How To Order

131 - S 40 05

SERIES NO — 1 — 2 — 3 — 4

ROW TYPE: S-SINGLE ROW (1-40 PINS)

INNER CONTACT GOLD PLATED:  
 05-5u"  
 10-10u"  
 20-20u"  
 30-30u"

NO. OF PINS

