



Series LZ1R-5.0, Plug Header Terminal Block Connectors

Plug Header
Right-Angle
5.0 mm Center Spacing
Rating – 320 V, 17.5 A

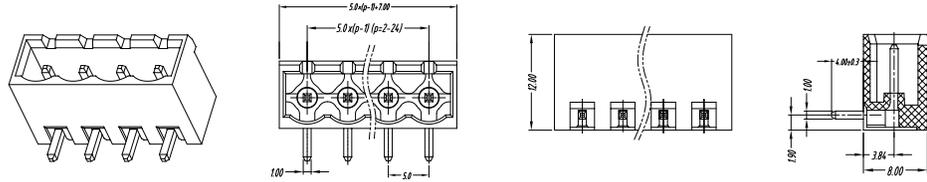

Recommended PC Board Layout




No. of Position	Width (mm)	Part Numbers	
		Green	Black
2	12.00	LZ1R-5.0/02P	—
3	17.00	LZ1R-5.0/03P	—
4	22.00	LZ1R-5.0/04P	—
5	27.00	LZ1R-5.0/05P	—
6	32.00	LZ1R-5.0/06P	—
7	37.00	LZ1R-5.0/07P	—
8	42.00	LZ1R-5.0/08P	—
9	47.00	LZ1R-5.0/09P	—
10	52.00	LZ1R-5.0/10P	—
11	57.00	LZ1R-5.0/11P	—
12	62.00	LZ1R-5.0/12P	—
13	67.00	LZ1R-5.0/13P	—

No. of Position	Width (mm)	Part Numbers	
		Green	Black
14	72.00	LZ1R-5.0/14P	—
15	77.00	LZ1R-5.0/15P	—
16	82.00	LZ1R-5.0/16P	—
17	87.00	LZ1R-5.0/17P	—
18	92.00	LZ1R-5.0/18P	—
19	97.00	LZ1R-5.0/19P	—
20	102.00	LZ1R-5.0/20P	—
21	107.00	LZ1R-5.0/21P	—
22	112.00	LZ1R-5.0/22P	—
23	117.00	LZ1R-5.0/23P	—
24	122.00	LZ1R-5.0/24P	—


*Dimensions in millimeters. To convert to inches, divide by 25.4.

Series LZ1R-5.08, Plug Header Terminal Block Connectors

Plug Header
Right-Angle
5.08 mm Center Spacing
Rating – 320 V, 17.5 A

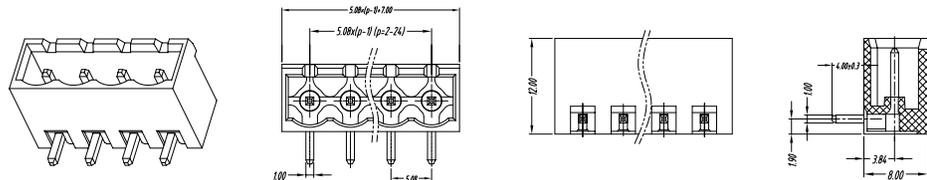

Recommended PC Board Layout



No. of Position	Width (mm)	Part Numbers	
		Green	Black
2	12.08	LZ1R-5.08/02P	—
3	17.16	LZ1R-5.08/03P	—
4	22.24	LZ1R-5.08/04P	—
5	27.32	LZ1R-5.08/05P	—
6	32.40	LZ1R-5.08/06P	—
7	37.48	LZ1R-5.08/07P	—
8	42.56	LZ1R-5.08/08P	—
9	47.64	LZ1R-5.08/09P	—
10	52.72	LZ1R-5.08/10P	—
11	57.80	LZ1R-5.08/11P	—
12	62.88	LZ1R-5.08/12P	—
13	67.96	LZ1R-5.08/13P	—

No. of Position	Width (mm)	Part Numbers	
		Green	Black
14	73.04	LZ1R-5.08/14P	—
15	78.12	LZ1R-5.08/15P	—
16	83.20	LZ1R-5.08/16P	—
17	88.28	LZ1R-5.08/17P	—
18	93.36	LZ1R-5.08/18P	—
19	98.44	LZ1R-5.08/19P	—
20	103.52	LZ1R-5.08/20P	—
21	108.60	LZ1R-5.08/21P	—
22	113.68	LZ1R-5.08/22P	—
23	118.76	LZ1R-5.08/23P	—
24	123.84	LZ1R-5.08/24P	—

*Dimensions in millimeters. To convert to inches, divide by 25.4.