



LEDTECH ELECTRONICS CORP.

: NANYA ROAD,MUGANG ZHAOQING
: CITY GUANGDONG CHINA.

: TEL:86-758-2875541,2870651,2877464,2876185,2877017

: FAX:86-758-2878014

: *Http://www.ledtech.com.tw*

SPECIFICATION

PART NO. : LT631Y-H103-C17

2.9MM ROUND LED LAMP WITH HOLDER

Approved by

Checked by

Prepared by

Fang

Dobby

Kssys



2.9MM ROUND LAMP WITH HOLDER PART NO. : LT631Y-H103-C17

Page : 1/5


Features

- * Versatile mounting on PC board or panel.
- * Low power consumption
- * High light output
- * Free combination and easy to assembly.
- * Reliable and rugged
- * IC compatible

Description

The LED assembly is made from plastic holder and combination of lamps. It will easily mount the applicable lamps on any panel.

Package Dimensions

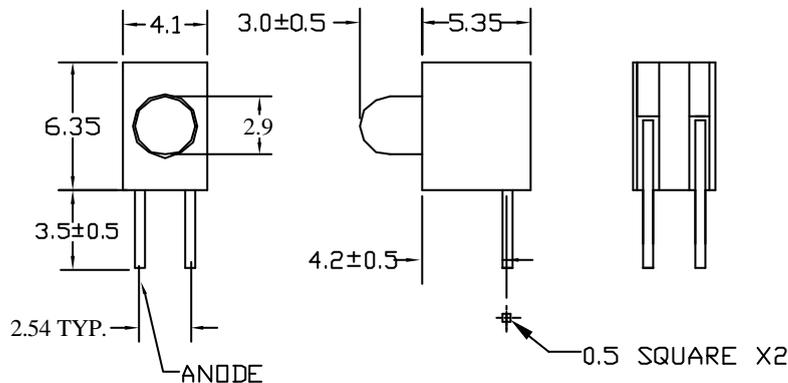

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.25 mm unless otherwise noted.

Part No.	Led Chip		Lens Color
	Material	Emitting Color	
LT631Y-H103-C17	GaAsP/GaP	Yellow	Yellow diffused



2.9MM ROUND LAMP WITH HOLDER
PART NO. : LT631Y-H103-C17

Absolute Maximum Ratings at Ta=25 :

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	72	mW
Reverse Voltage	Vr	5	V
D.C. Forward Current	If	30	mA
Peak Current (1/10 Duty Cycle , 0.1 ms Pulse Width)	If(Peak)	100	mA
Operating Temperature Range	Topr	-25 to +85	
Storage Temperature Range	Tstg	-40 to +100	
Lead Soldering Temp.(1.6mm from body) for 5 seconds		260	


Electrical and Optical Characteristics :

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Luminous Intensity	Iv	If=20mA	12.0	20.0		mcd
Forward Voltage	Vf	If=20mA		2.1	2.6	V
Peak Wavelength	P	If=20mA		585		nm
Dominant Wavelength	D	If=20mA		590		nm
Reverse Current	Ir	Vr=5V			100	μ A
Viewing Angle	2 1/2	If=20mA		54		deg
Spectrum Line Halfwidth		If=20mA		35		nm




2.9MM ROUND LAMP WITH HOLDER
PART NO. : LT631Y-H103-C17


Typical Electrical / Optical Characteristics Curves :

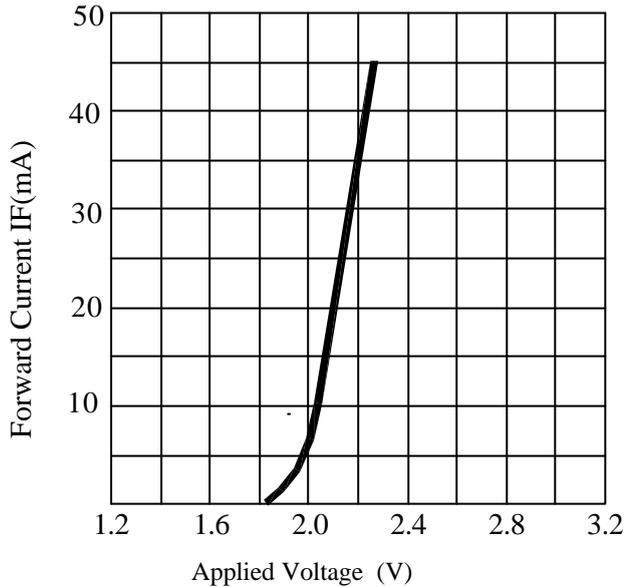


FORWARD CURRENT VS.APPLIED VOLTAGE

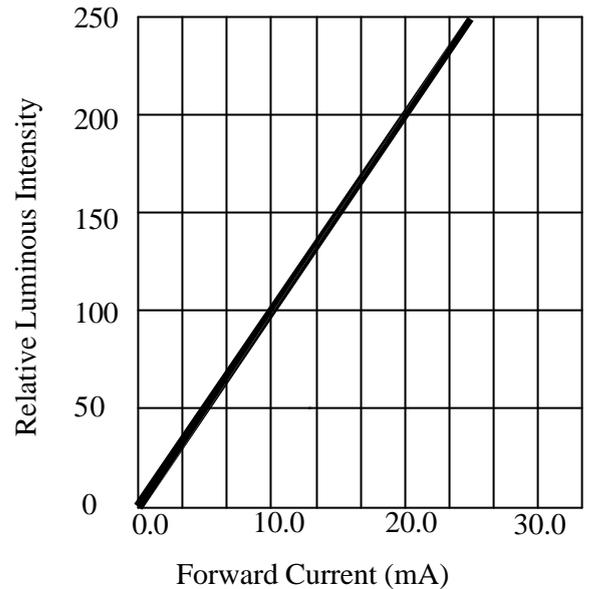

FORWARD CURRENT VS. LUMINOUS INTENSITY

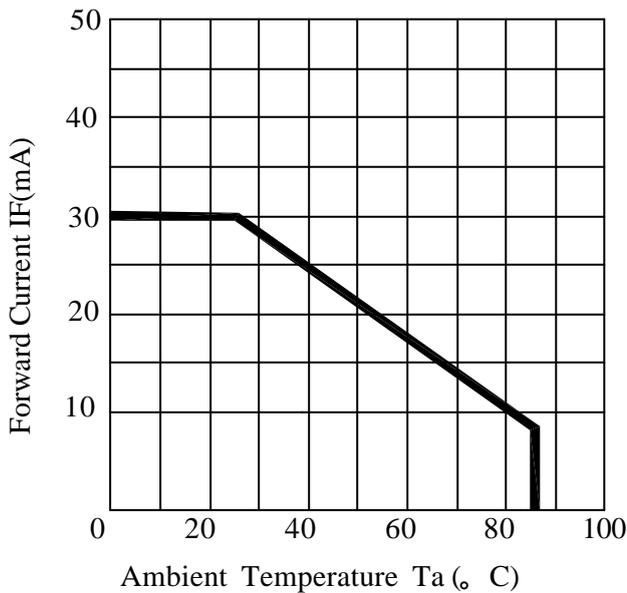

AMBIENT TEMPERATURE VS. FORWARD CURRENT

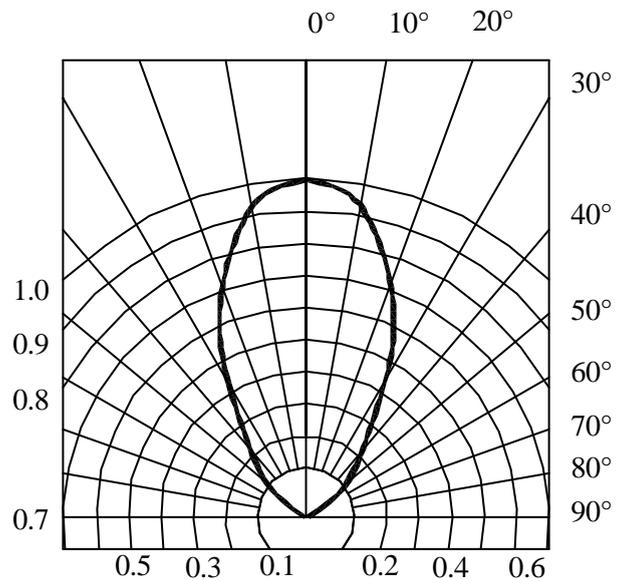

RADIATION DIAGRAM



2.9MM ROUND LAMP WITH HOLDER
PART NO. : LT631Y-H103-C17

Page : 4/5

Reliability Test Method :

Test Item	Test Condition	Duration Time
Operation Life	If=20mA / Ta=25	168hrs
Storage at High Temperature	Ta=100	168hrs
Storage at Low Temperature	Ta=-40	168hrs
Storage at High Temperature/High Humidity	Ta=85 /RH=85%	168hrs
Operating at High Temperature	Ta=85 / If=20mA	168hrs
Operating at Low Temperature	Ta=25 / If=20mA	168hrs
Thermal Shock	Ta/T=100 /30min~ -40 /30min	10 cycles
Solderability	Tsol=230	5 sec

Criteria for Judging The Damage:

Item	Symbol	Test Condition	Criteria for Judgment	
			Min.	Max.
Forward Voltage	Vf	If=20mA	-----	Initial Data x1.1
Reverse Current	Ir	Vr=5V	-----	100 μ A
Luminous Intensity	Iv	If=20mA	Initial Data x0.8	-----


2.9MM ROUND LAMP WITH HOLDER

PART NO. : LT631Y-H103-C17

ENCASED TYPE


PLASTIC PACKAGE
 QUANTITY: 500 PCS

LEDTECH ELECTRONICS CORP.					
PART NO :LTXXXX-XX					
QTY	:	PCS			
LOT NO	:	XXXXXXXXXX			
DATE	:				
BIN CODE:					

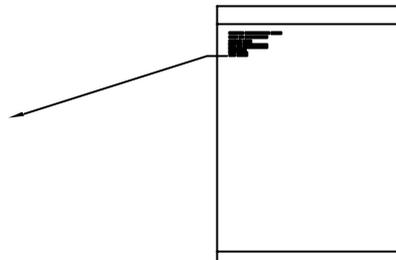

INNER BOX
 QUANTITY: 10 PACKETS
 TOTAL: 5,000 PCS

PART NO.	LXXXX-XX-XX				
LOT NO.	XXXXXXXXXX				
BIN CODE	Xx X	Xx X	Xx X	Xx X	TOTAL
QUANTITY	PCS	PCS	PCS	PCS	PCS
DATE	XXXX . XX . XX				

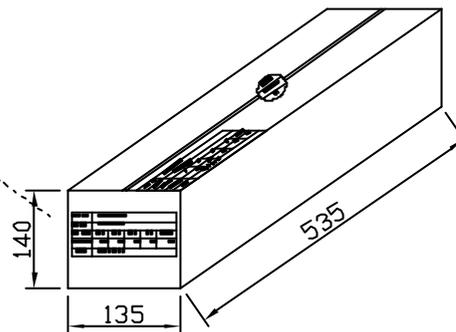

OUTER CARTON
 QUANTITY: 4 BOX
 TOTAL: 20,000 PCS

C/T NO. 箱 號	XX
PART NO. 料 號	LXXXX-XX-XX
QUANTITY 數 量	PCS
N.W. 淨 重	KGS
G.V. 毛 重	KGS
REMARK 備 註	

