


Device Selection Guide

Part Number EOZ-	Total Flux $\Phi_V(\text{mlm})^{[1]}$ @ $I_F = 70 \text{ mA}$		Luminous Intensity $I_V(\text{mcd})/\Phi_V$ @ $I_F = 70 \text{ mA}$	Viewing Angle $2\theta_{1/2}$	Dominant Wavelength $\lambda d(\text{nm}) @ I_F = 70 \text{ mA}$	V_F @ $I_F = 70 \text{ mA}$		$I_R(\mu\text{A})$ @ $V_R = 10\text{V}$
	Min.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.	Max.
ZBRHCD0-TK	2000	2500	1.7	40°	623	2.7	3.0	100


BIN#	D	E	F		
Total Flux(mlm) @ $I_F = 70 \text{ mA}$	2000-2750	2750-3850	3850-5400		

Notes: [1] Tolerance Value of $\Phi_V \pm 15\%$.

Package Dimensions

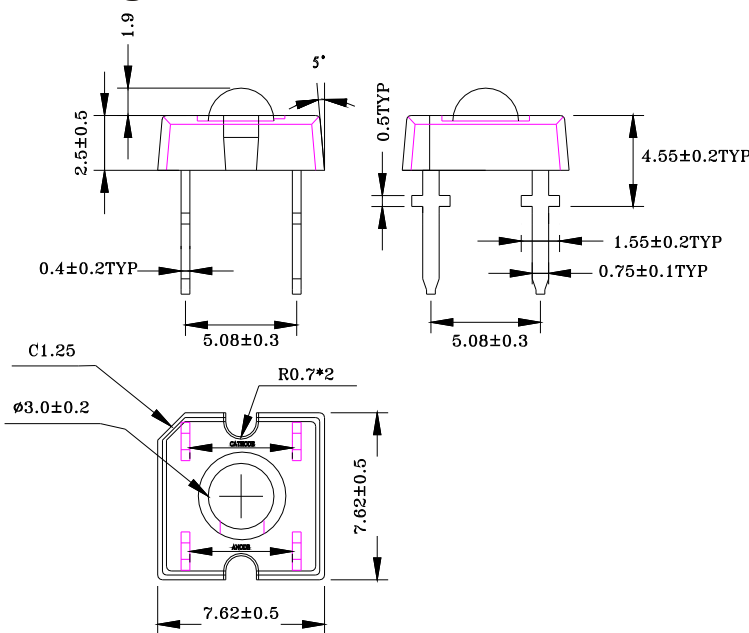

Beam Pattern

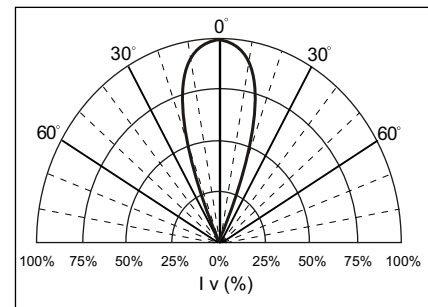

Note:

- All dimensions are in millimeters.
- Tolerance is $\pm 0.20\text{mm}$ unless otherwise noted.
- Protruded resin under bottom surface of epoxy is 1.5mm max.
- Lead spacing is measured where the leads emerge from the package
- Specifications are subject to change without notice.

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	Symbol		<i>USER---APPROVED</i>
DC Forward Current	I_f	70mA	
Reverse Voltage	V_r	10V	
Power Dissipation	P_D	210mW	
Operating Temperature Range	T_{opr}	-40°C to + 85°C	
Storage Temperature Range	T_{sto}	-40°C to + 100°C	
Lead Soldering Temperature	T_{sol}	260°C for 5 Seconds	

Notes: Duty Ratio=1/10, Pulse Width=0.1 ms