
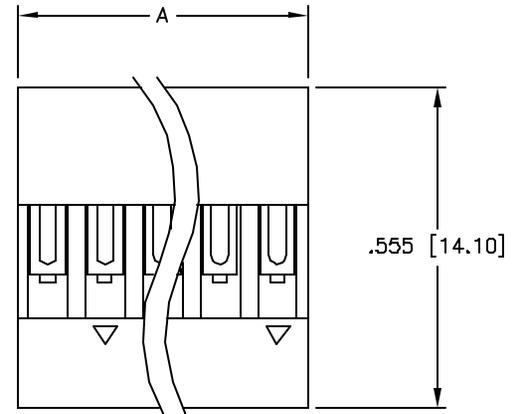
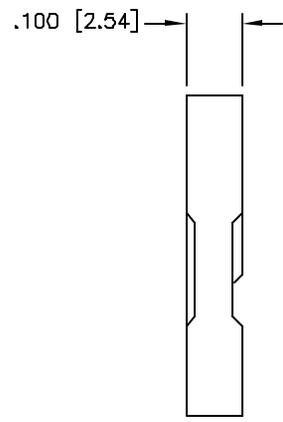


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/7/05	

APPROVED: _____
DATE: _____ TITLE: _____

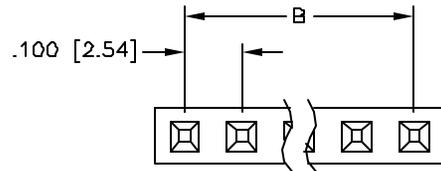

Positions: 2 thru 40
A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, UL94V-2
Insulator color: Black
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: -65°C to +105°C
Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		HOLES
.X ± .10	Ø.X ± .10	
.XX ± .020	Ø.XX ± .015	
.XXX ± .015	Ø.XXX ± .010	
APPROVALS		DATE
DRAWN	SS	4/7/05
CHECKED		
APPROVED		

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
CRIMP CONTACT HOUSING

SIZE **X** PART NO. **MTE-XX** REV. **-**

REF: _____ SCALE: **NTS** SHEET **1** OF **1**