

F4813 = Product group; Product group discount F 48 1_

Centronic Sockets Angled, with Spring Clips Series: CBL_W

Technical Specifications

Insulating Shell:.....PBT Glass Filled, UL94V-0
 Contact Material:.....Phosphor Bronze
 Housing:.....Steel
 Operating Current:.....5A
 Dielectric Strength (For 1 Min.):.....1000V AC
 Insulation Resistance (at 500V DC), Min.:.....1000MΩ
 Operating Temperature:.....-55...+105°C

Dimensions


Part Nr.	Nr. of Poles	A	B	C	D	E
		[mm]	[mm]	[mm]	[mm]	[mm]
CBL36W	36	36,72	48,90	59,70	67,70	11,90
CBL50W	50	52,00	64,10	75,00	83,00	11,90

Terms of Delivery


Minimum order quantity: 1 PKU = 5 pieces

Manufacturer: Various

Part Nr.	Part description
CBL36W	Centronics Socket Angled 36-Pole
CBL50W	Centronics Socket Angled 50-Pole

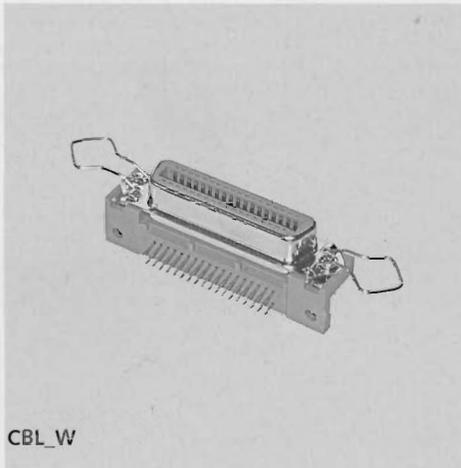

CBL_W

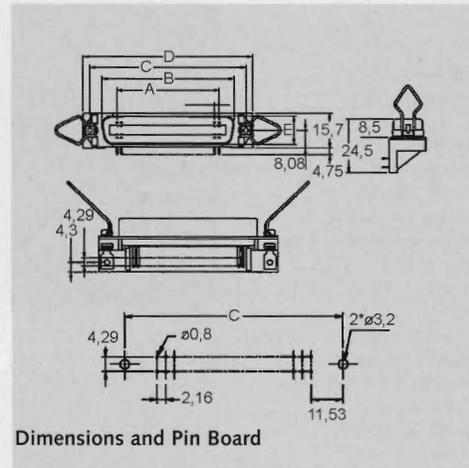

Dimensions and Pin Board

F4815 = Product group; Product group discount F 48 1_

Centronic Sockets and Plugs IDC for Flat Cables Series: CBL_FB, CSL_FB

Features

- IDC technique for flat cables AWG28
- 36 and 50 poles
- Female sockets encased with spring clips

Technical Specifications

Insulation Shell:.....PBT Glass Filled, UL94V-0
 Contact Material:.....Phosphor Bronze
 Contact Surface:.....Gold Over Nickel
 Housing:.....Steel
 Operating Current:.....5A
 Contact Resistance (For 1 Min.):.....1000V AC
 Isolation Resistance (at 500V DC), Min.:.....1000MΩ
 Temperature Range:.....-55...+105°C

Dimensions

Part Nr.	Nr. of Poles	A	B	C
		[mm]	[mm]	[mm]
CBL36FB	36	36,72	61,60	53,30
CBL50FB	50	51,84	82,80	68,50
CSL36FB	36	36,72	61,60	53,30
CSL50FB	50	51,84	76,70	68,50

Note

For suitable flat cables, please see product groups G1833 and G1837 in this catalogue.

For suitable IDC crimping fixtures, please see product group T4651 in our "Components and Devices" catalogue.

Terms of Delivery


Minimum order quantity: 1 PKU = 5 pieces

Manufacturer: Various


Part Nr.	Part description
CBL36FB	Centronics Socket 36-Pole
CBL50FB	Centronics Socket 50-Pole
CSL36FB	Centronics Plug 36-Pole
CSL50FB	Centronics Plug 50-Pole




CBL_FB

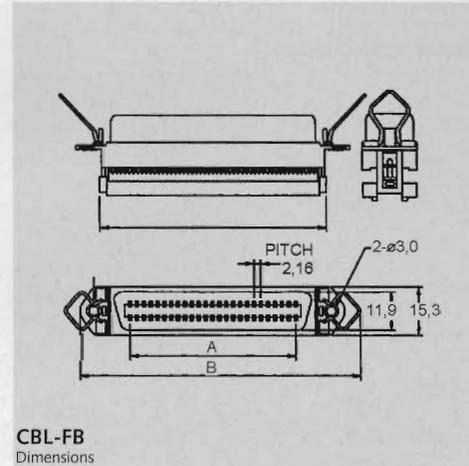

CBL-FB
Dimensions

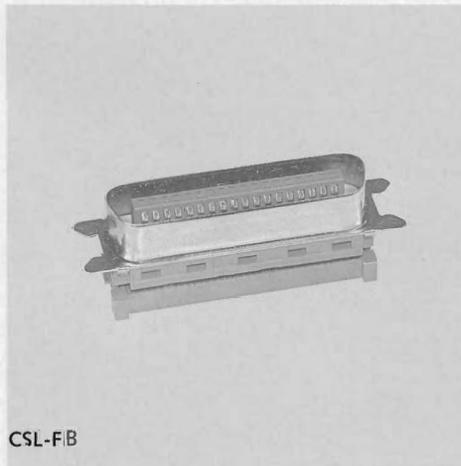

CSL-FB

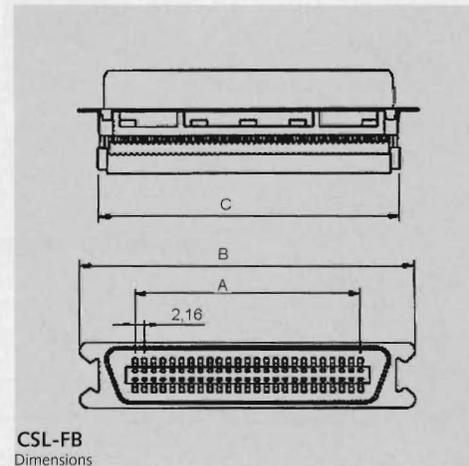

CSL-FB
Dimensions